



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**SERVICIOS / EXTRACTION**  
Component  
**Hydraulic System**  
Fluid  
**ANDEROL BIO GUARD FRHF 46 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>AN06060236</b>	AN05974960	AN05973637
Sample Date		Client Info		<b>04 Oct 2023</b>	01 Sep 2023	04 Aug 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Lead	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	2	<1
Water	%	ASTM D6304	>0.05	<b>0.038</b>	0.034	0.035
ppm Water	ppm	ASTM D6304	>500	<b>388</b>	349.7	358.6
Particles >4µm		ASTM D7647	>5000	<b>508</b>	1849	803
Particles >6µm		ASTM D7647	>1300	<b>166</b>	480	229
Particles >14µm		ASTM D7647	>160	<b>33</b>	74	34
Particles >21µm		ASTM D7647	>40	<b>12</b>	23	12
Particles >38µm		ASTM D7647	>10	<b>1</b>	1	1
Particles >71µm		ASTM D7647	>3	<b>0</b>	1	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>16/15/12</b>	18/16/13	17/15/12
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	<1	0
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>0</b>	4	0
Calcium	ppm	ASTM D5185m		<b>1</b>	0	0
Phosphorus	ppm	ASTM D5185m	196	<b>239</b>	247	193
Zinc	ppm	ASTM D5185m		<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m	1440	<b>1939</b>	1767	1842
Acid Number (AN)	mg KOH/g	ASTM D8045	1	<b>0.99</b>	1.00	1.07
Visc @ 40°C	cSt	ASTM D445	45.41	<b>47.8</b>	48.1	47.8

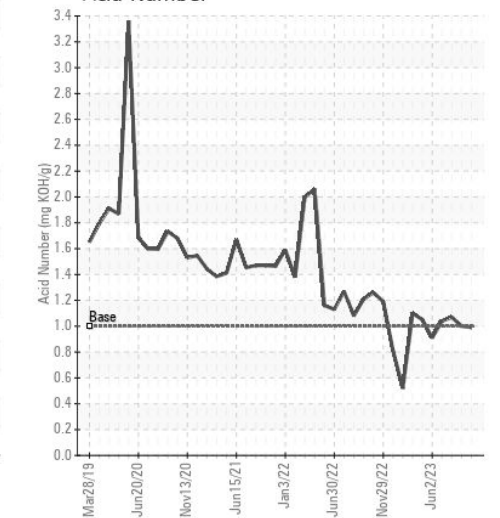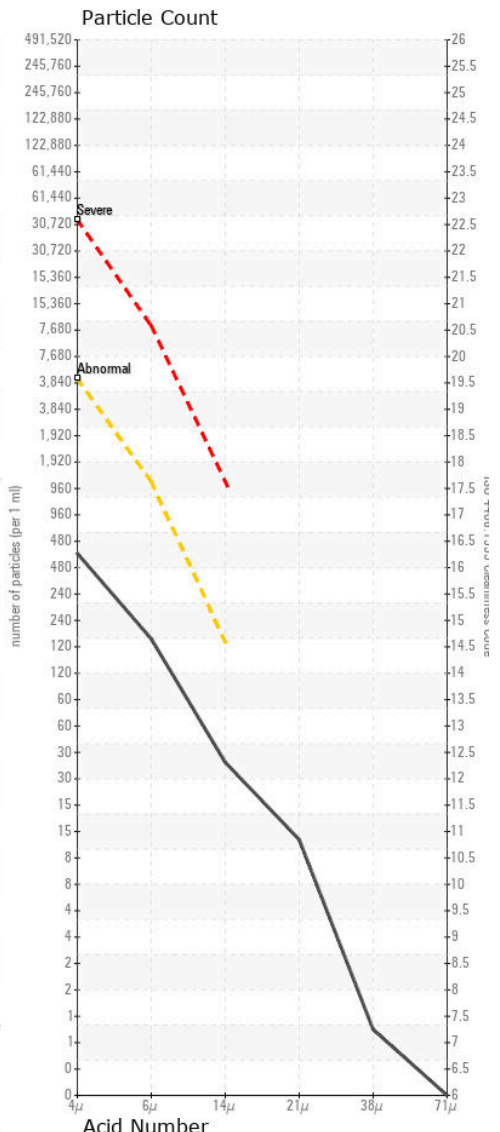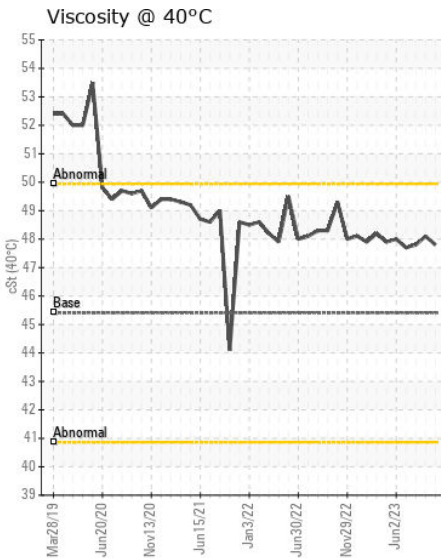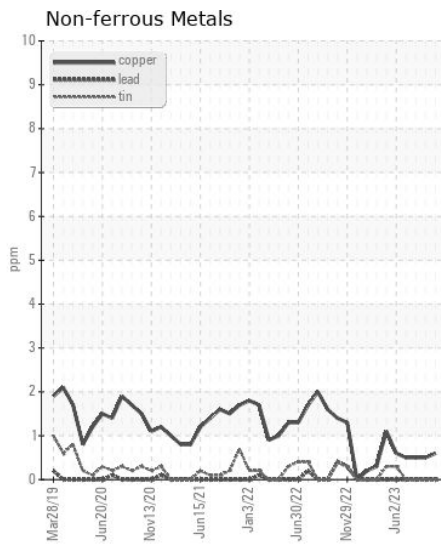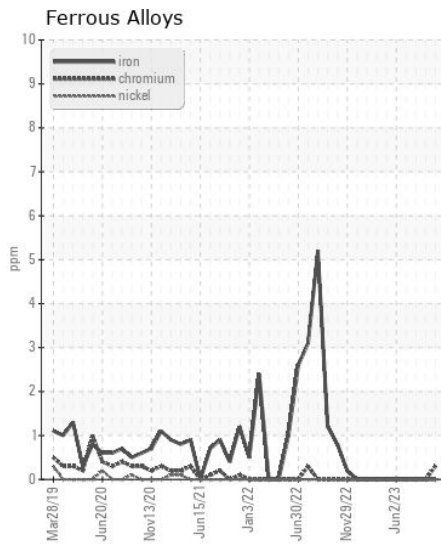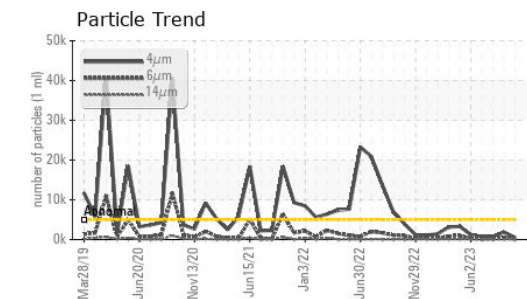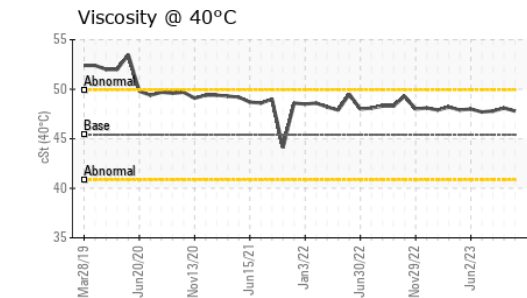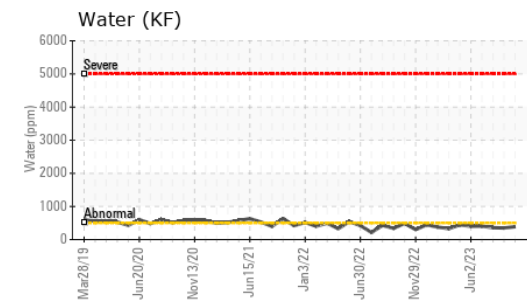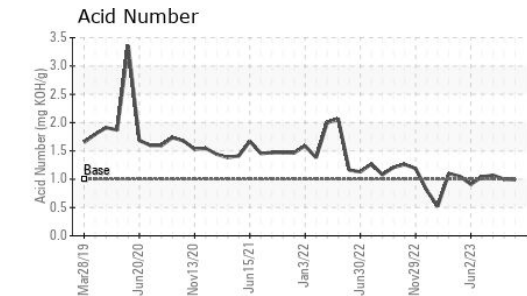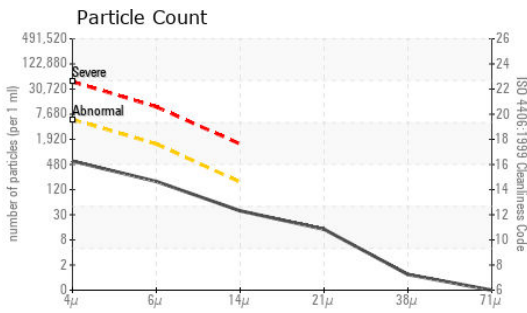

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : AN06060236 **Received** : 12 Jan 2024  
**Lab Number** : 06060236 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10831618 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CONEXO INC**  
 2320 STARR LAKE DRIVE  
 ACWORTH, GA  
 US 30101  
 Contact: RICARDO HEIN  
 rhein@conexoinc.com  
 T: (678)806-0131  
 F: x: