



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1568
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0870733	WC0806553	WC0697147
Sample Date		Client Info		16 Nov 2023	08 May 2023	16 Jun 2022
Machine Age	mls	Client Info		184110	174191	159604
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				NORMAL	SEVERE	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	12	28	29
Chromium	ppm	ASTM D5185m	>20	<1	1	1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	6	8	11
Lead	ppm	ASTM D5185m	>40	<1	0	<1
Copper	ppm	ASTM D5185m	>330	<1	2	10
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185m	>25	5	9	9
Potassium	ppm	ASTM D5185m	>20	4	5	24
Fuel	%	ASTM D3524	>5	1.7	9.3	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	1	0.8
Nitration	Abs/cm	*ASTM D7624	>20	9.1	12.2	12.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	25.3	25.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	2	3	3
Boron	ppm	ASTM D5185m	250	33	19	28
Barium	ppm	ASTM D5185m	10	0	2	0
Molybdenum	ppm	ASTM D5185m	100	80	84	81
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	138	43	46
Calcium	ppm	ASTM D5185m	3000	1981	2167	2031
Phosphorus	ppm	ASTM D5185m	1150	1004	991	875
Zinc	ppm	ASTM D5185m	1350	1180	1190	1062
Sulfur	ppm	ASTM D5185m	4250	3499	3799	3342
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.8	22.3	22.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.0	5.0	5.9
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	11.4	13.0

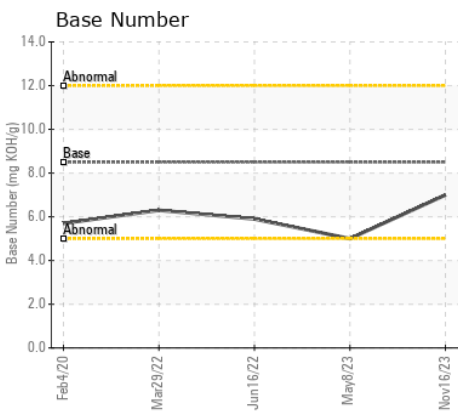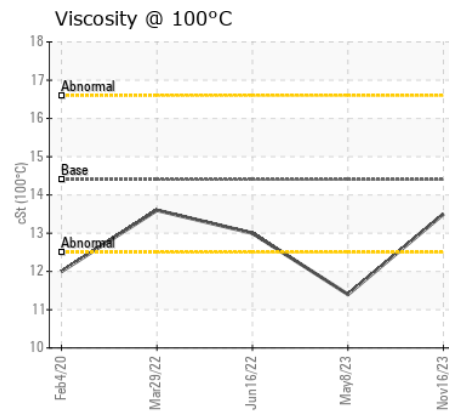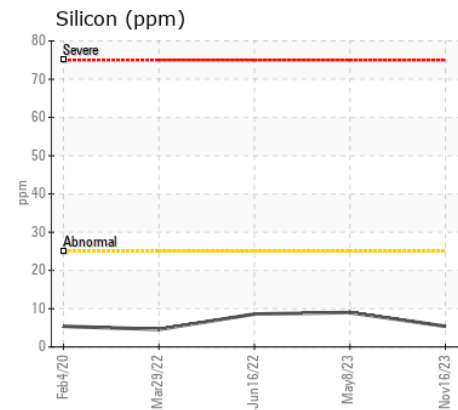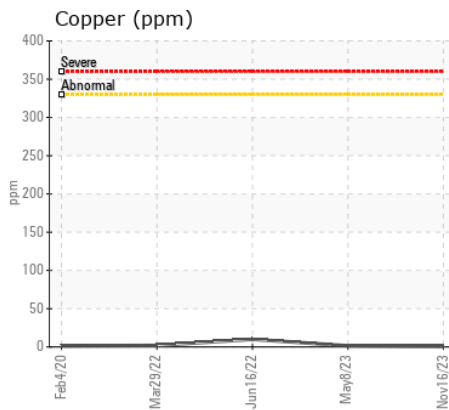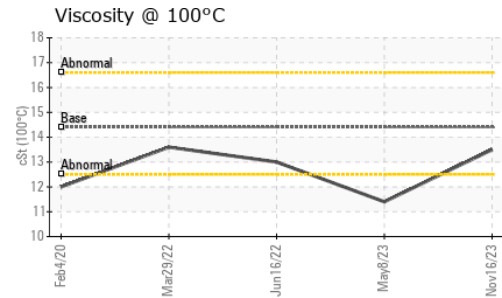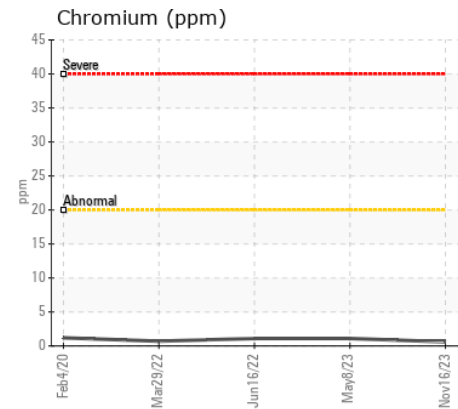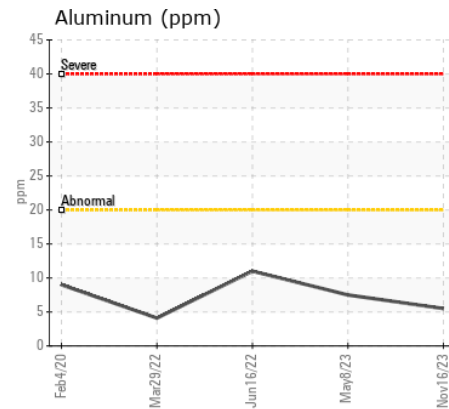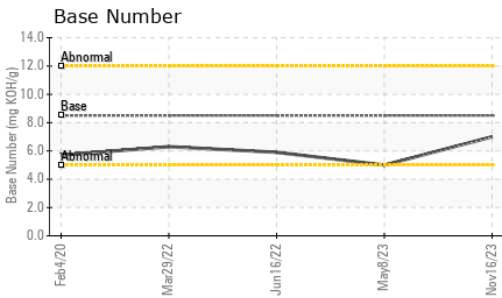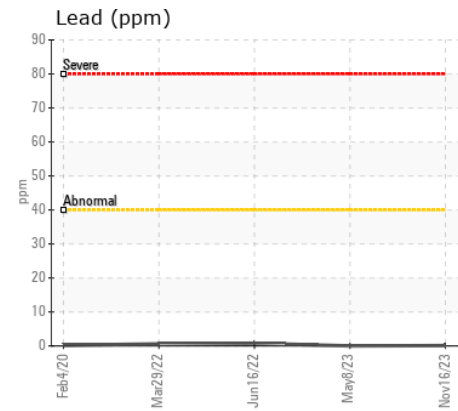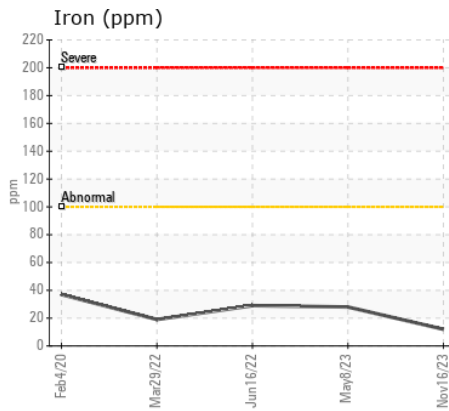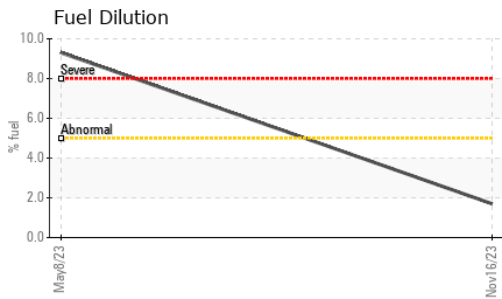

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0870733 **Received** : 16 Jan 2024
Lab Number : 06061717 **Diagnosed** : 18 Jan 2024
Unique Number : 10833099 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel, TBN)

WAKE COUNTY PUBLIC SCHOOL SYSTEM
 1551 ROCK QUARRY ROAD
 RALEIGH, NC
 US 27610
 Contact: DEVIN WEBER
 dweber@wcpss.net
 T: (919)856-8076
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)