



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 210G 1FF210GXTMF529230**  
 Component  
**Hydraulic System**  
 Fluid  
**HITACHI HYDRAULIC SUPER EX 46HN (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0198601</b>	JR0147689	JR0148340
Sample Date		Client Info		<b>11 Jan 2024</b>	26 Apr 2023	09 Feb 2023
Machine Age	hrs	Client Info		<b>1915</b>	1508	1292
Oil Age	hrs	Client Info		<b>1915</b>	1508	1292
Filter Age	hrs	Client Info		<b>1000</b>	0	292
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Filter Changed		Client Info		<b>Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	<b>9</b>	11	9
Iron	ppm	ASTM D5185m	>32	<b>3</b>	3	4
Chromium	ppm	ASTM D5185m	>9	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>1</b>	<1	0
Lead	ppm	ASTM D5185m	>28	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>1</b>	1	2
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	<b>&lt;1</b>	0	<1
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>80000	<b>9992</b>	28384	13249
Particles >6µm		ASTM D7647	>20000	<b>657</b>	4149	1016
Particles >14µm		ASTM D7647	>640	<b>5</b>	42	25
Particles >21µm		ASTM D7647	>160	<b>2</b>	8	5
Particles >38µm		ASTM D7647	>40	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>23/21/16	<b>20/17/10</b>	22/19/13	21/17/12
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<b>0</b>	0	0
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>0</b>	0	0
Calcium	ppm	ASTM D5185m		<b>&lt;1</b>	3	0
Phosphorus	ppm	ASTM D5185m	827	<b>493</b>	467	425
Zinc	ppm	ASTM D5185m	0	<b>4</b>	15	15
Sulfur	ppm	ASTM D5185m	13	<b>70</b>	0	0
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	<b>0.19</b>	0.18	0.20
Visc @ 40°C	cSt	ASTM D445	47	<b>47.6</b>	46.8	47.2

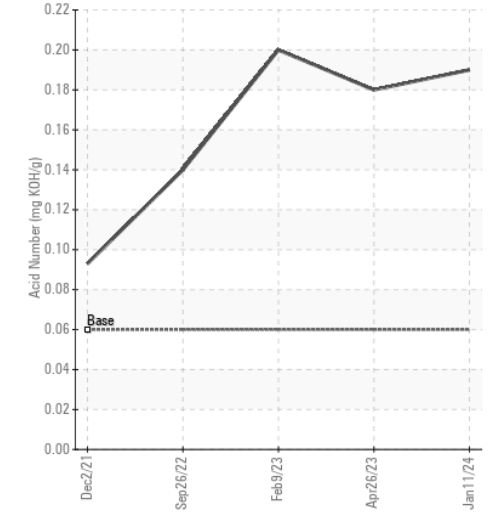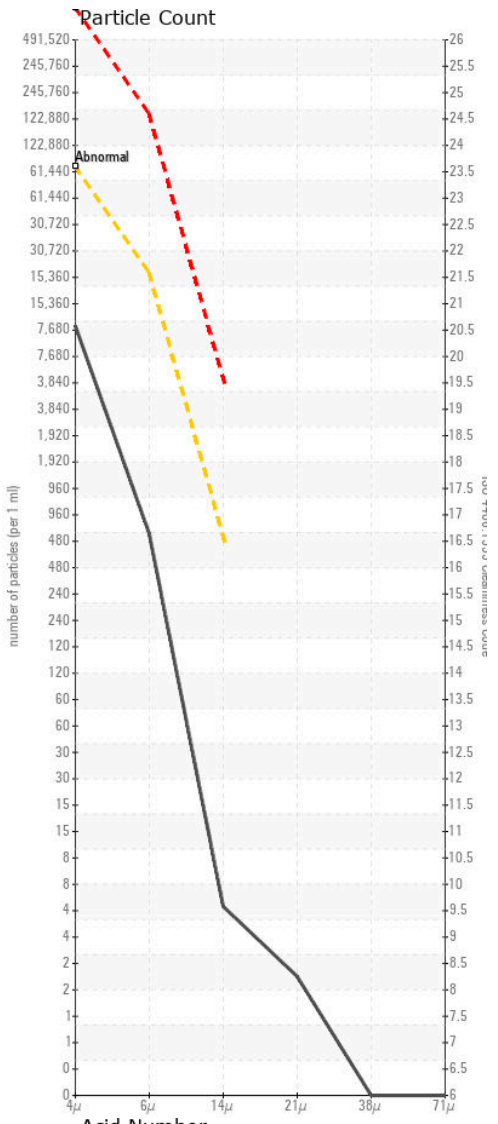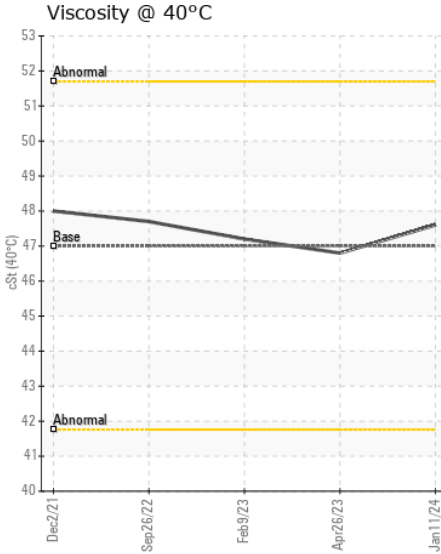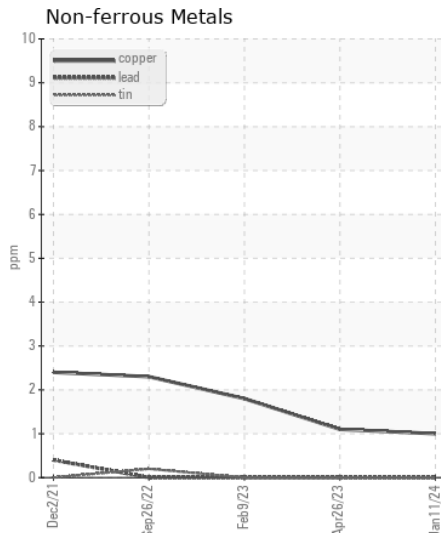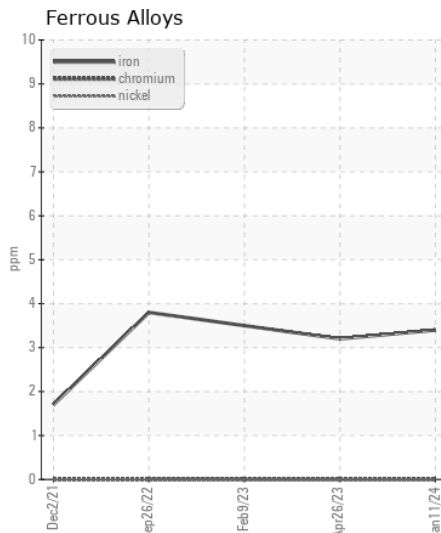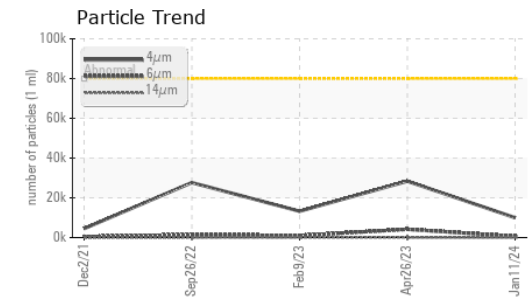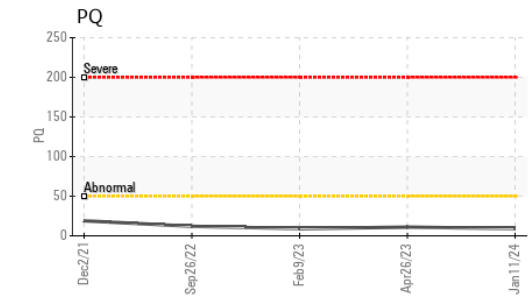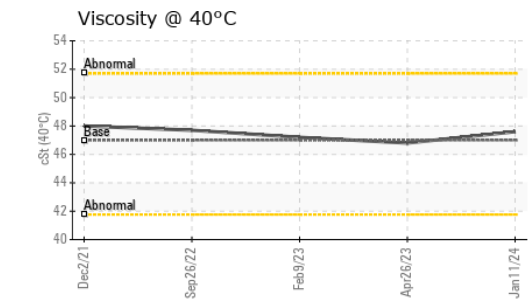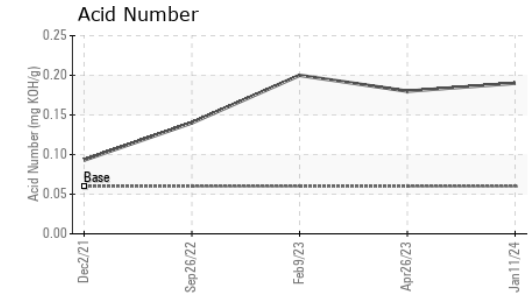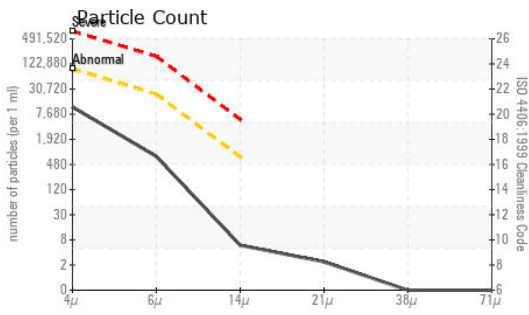

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0198601 **Received** : 17 Jan 2024  
**Lab Number** : 06062550 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10833932 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269  
 Contact: CHARLOTTE SHOP  
 myoung@jamesriverequipment.com  
 T: (704)597-0211  
 F: (704)596-6198