



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HITACHI 1FFDC571ELF340844
 Component
Swing Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0196346	JR0173322	JR0082583
Sample Date		Client Info		15 Jan 2024	31 May 2023	30 Mar 2021
Machine Age	hrs	Client Info		3555	2653	460
Oil Age	hrs	Client Info		1000	1000	460
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		23	30	47
Iron	ppm	ASTM D5185m	>400	141	186	140
Chromium	ppm	ASTM D5185m	>10	1	2	2
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	<1	<1	<1
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>200	<1	1	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	18	18	15
Potassium	ppm	ASTM D5185m	>20	2	6	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	4	2
Boron	ppm	ASTM D5185m		18	56	60
Barium	ppm	ASTM D5185m		<1	0	8
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		1	4	3
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		7	31	16
Phosphorus	ppm	ASTM D5185m		355	477	491
Zinc	ppm	ASTM D5185m		0	<1	7
Sulfur	ppm	ASTM D5185m		18195	17910	12946
Visc @ 40°C	cSt	ASTM D445		140.0	183	184

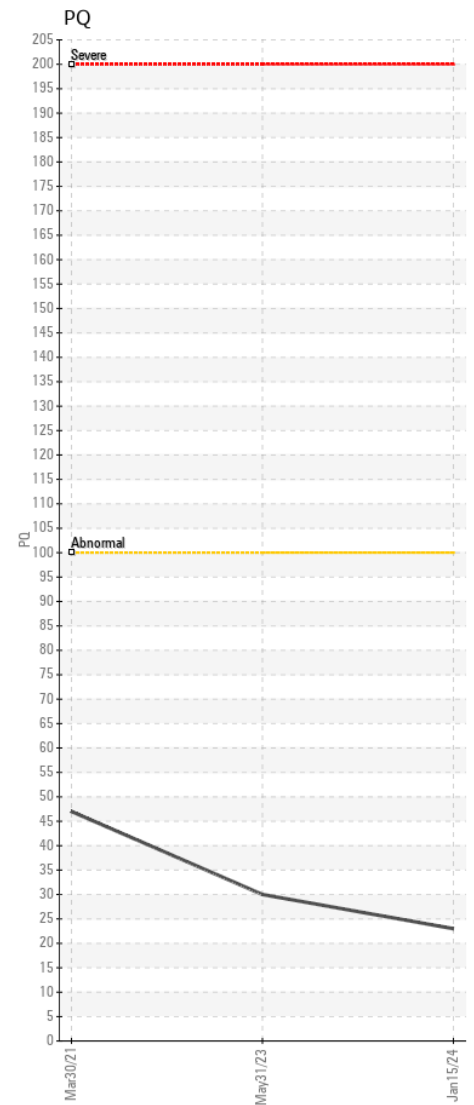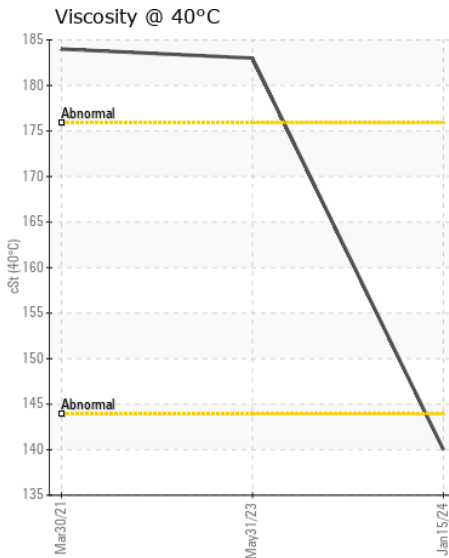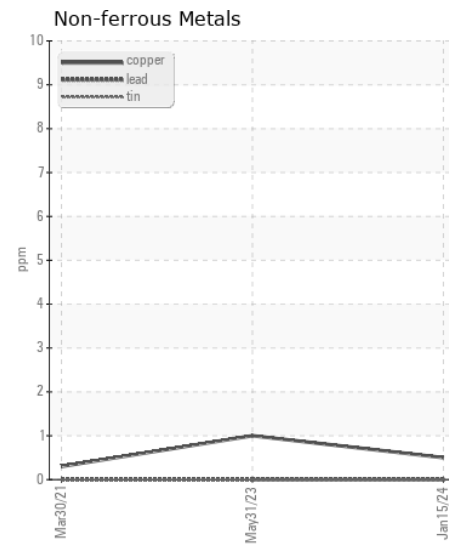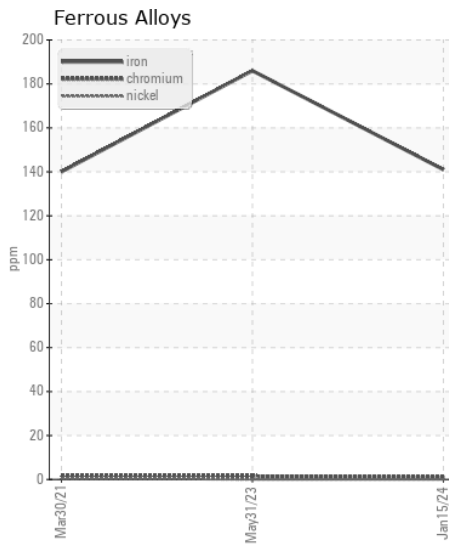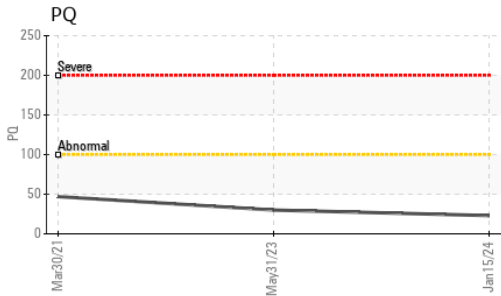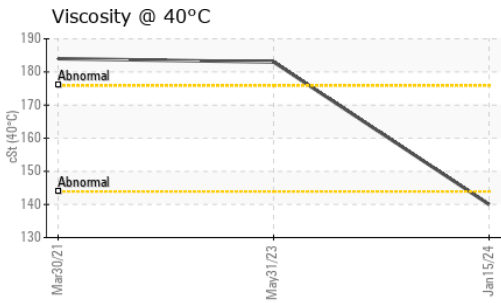

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0196346 **Received** : 17 Jan 2024
Lab Number : 06063025 **Diagnosed** : 18 Jan 2024
Unique Number : 10834407 **Diagnostician** : Doug Bogart
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CASTLE HAYNE
 113 CROWATAN ROAD
 CASTLE HAYNE, NC
 US 28429-5819

Contact: WILMINGTON SHOP

todd.simmons@jamesriverequipment.com; canastasio@wearcheck.com; canastasio@we

T: (910)675-9211

F: