



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 748L 1DW748LAOKF694617

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0005298	---	---
Sample Date		Client Info		12 Jan 2024	---	---
Machine Age	hrs	Client Info		7520	---	---
Oil Age	hrs	Client Info		7520	---	---
Filter Age	hrs	Client Info		7520	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a components first oil change.

Iron	ppm	ASTM D5185m	>51	3	---	---
Chromium	ppm	ASTM D5185m	>11	0	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	4	---	---
Lead	ppm	ASTM D5185m	>26	<1	---	---
Copper	ppm	ASTM D5185m	>26	<1	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	9	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	5.8	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<1	---	---
Boron	ppm	ASTM D5185m		278	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		236	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		809	---	---
Calcium	ppm	ASTM D5185m		1292	---	---
Phosphorus	ppm	ASTM D5185m		972	---	---
Zinc	ppm	ASTM D5185m		1110	---	---
Sulfur	ppm	ASTM D5185m		3165	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	10.6	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	15.2	---	---

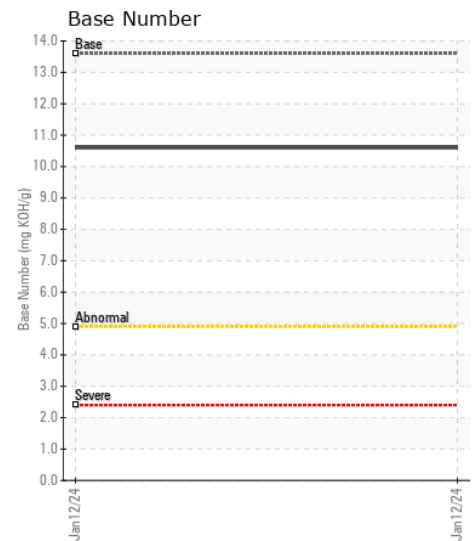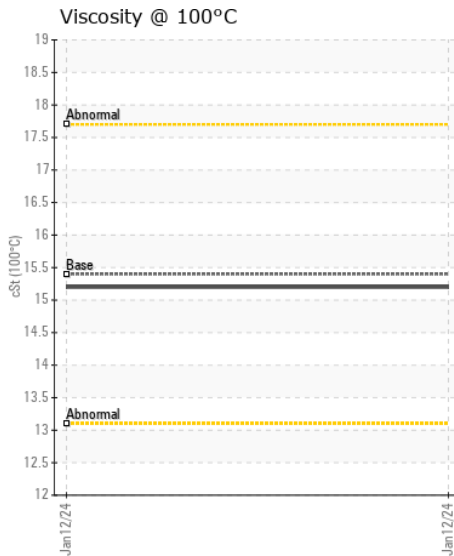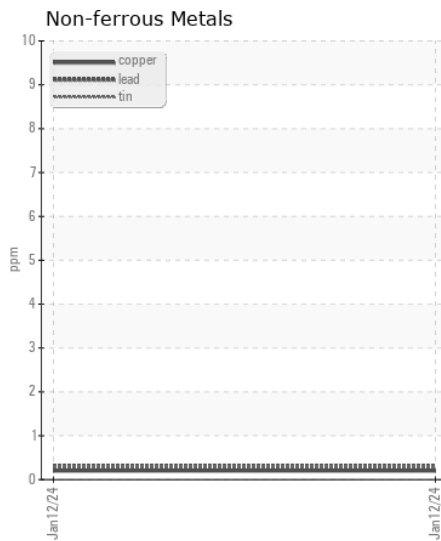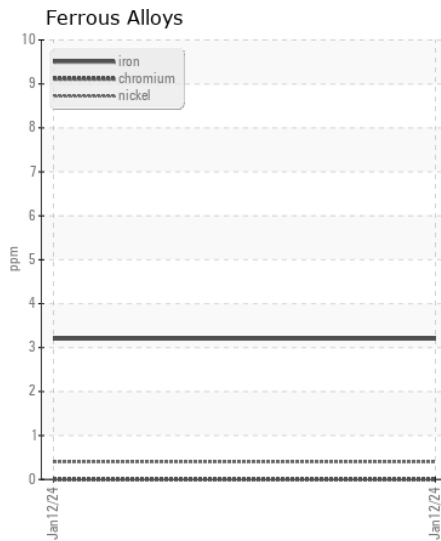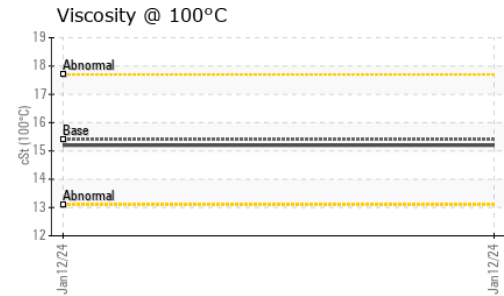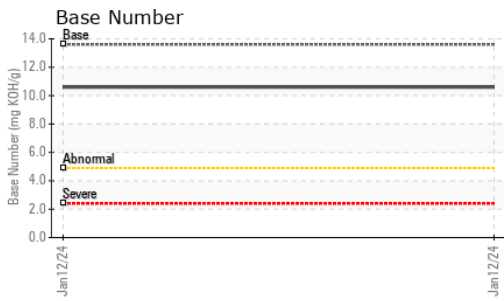

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0005298 **Received** : 17 Jan 2024
Lab Number : 06063312 **Diagnosed** : 18 Jan 2024
Unique Number : 10834694 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

WARRIOR TRACTOR AND EQUIPMENT - MONROEVILLE
 66 INDUSTRIAL PARK DR
 MONROEVILLE, AL
 US 36460

Contact: SCOTT WILLIAMSON
 swilliamson@warriortractor.com

T: (251)575-7111

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: