



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PETERBILT 21723
Component
Diesel Engine
Fluid
SHELL ROTELLA T 10W30 (52 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0866876	WC0832035	WC0831992
Sample Date		Client Info		15 Jan 2024	25 Sep 2023	24 Jul 2023
Machine Age	mls	Client Info		278230	265009	255746
Oil Age	mls	Client Info		13221	4263	11789
Filter Age	mls	Client Info		13221	0	11789
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	ATTENTION	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	9	23	11
Chromium	ppm	ASTM D5185m	>4	<1	2	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	6	2
Lead	ppm	ASTM D5185m	>45	<1	<1	1
Copper	ppm	ASTM D5185m	>85	0	3	<1
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	5	7	4
Potassium	ppm	ASTM D5185m	>20	8	5	10
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	10.4	9.0	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.2	21.9	23.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	5	0
Boron	ppm	ASTM D5185m	269	78	6	71
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	0	8	84	18
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m	20	74	▲ 1374	96
Calcium	ppm	ASTM D5185m	1521	2126	▲ 1494	2287
Phosphorus	ppm	ASTM D5185m	948	1030	▲ 1368	978
Zinc	ppm	ASTM D5185m	893	1249	▲ 1731	1242
Sulfur	ppm	ASTM D5185m		3355	▲ 3752	3620
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.7	17.9	18.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	4.9	6.2	6.0
Visc @ 100°C	cSt	ASTM D445	11.0	12.2	▲ 14.7	12.5

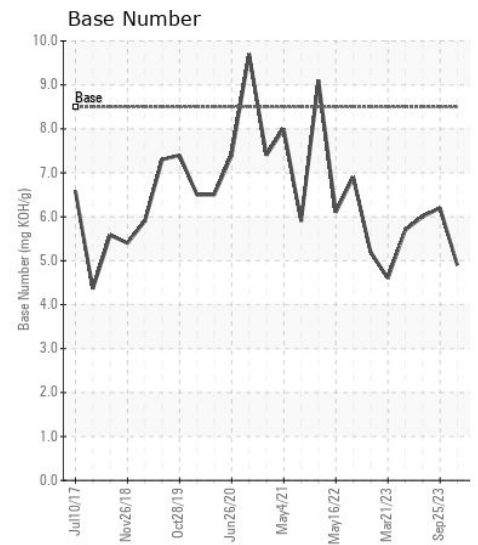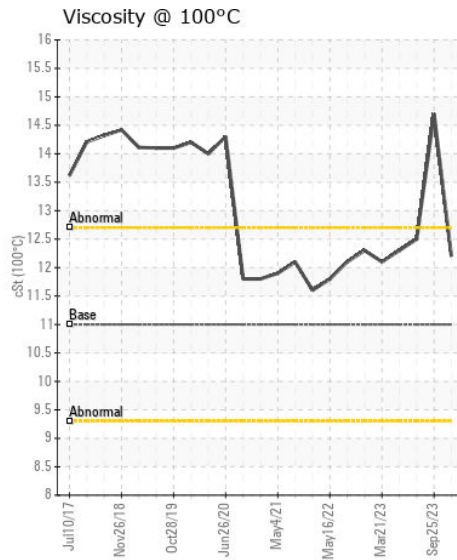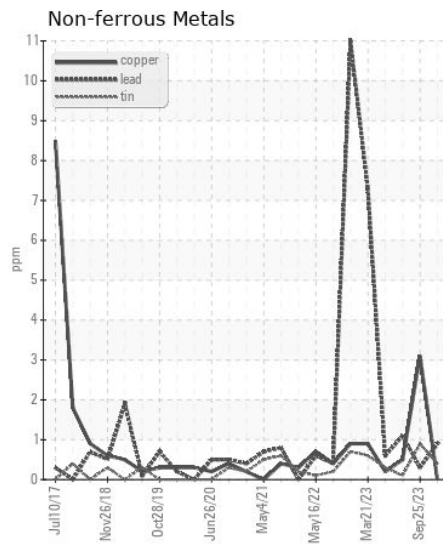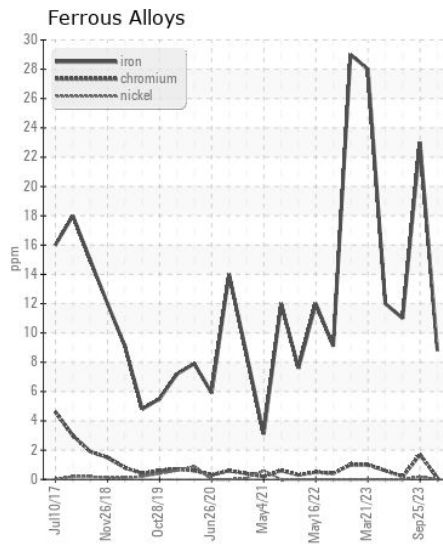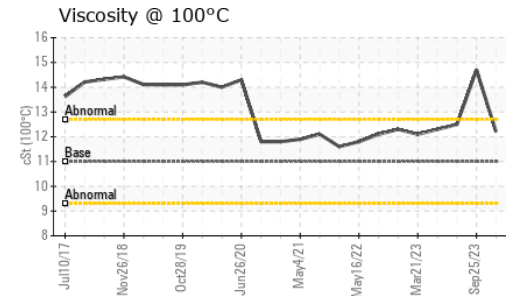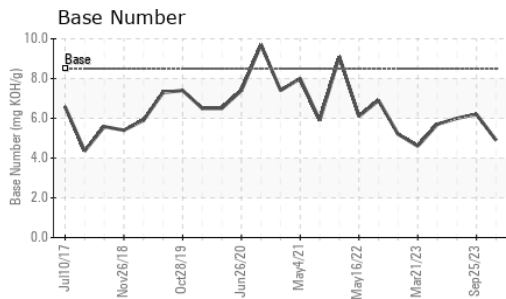

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0866876 **Received** : 17 Jan 2024
Lab Number : 06063353 **Diagnosed** : 18 Jan 2024
Unique Number : 10834735 **Diagnostician** : Wes Davis
Test Package : FLEET

GUY M TURNER & TURNER TRANSFER
 4505 SOUTH HOLDEN ROAD
 GREENSBORO, NC
 US 27406
 Contact: ROGER HIXSON
 rhixson@guyturner.com
 T: (336)294-4660
 F: (336)294-6644

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)