



OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
RONALD L SENSENBACH
 Machine Id
[RONALD L SENSENBACH] 006 685579-6
 Component
Starboard Reduction Gear
 Fluid
CHEVRON REGAL OIL R&O 150 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | MW0058703 | MW0055712 | MW0058660 |
| Sample Date | | Client Info | | 01 Jan 2024 | 01 Dec 2023 | 01 Nov 2023 |
| Machine Age | hrs | Client Info | | 92589 | 91848 | 91135 |
| Oil Age | hrs | Client Info | | 0 | 0 | 8775 |
| Filter Age | hrs | Client Info | | 0 | 0 | 1762 |
| Oil Changed | | Client Info | | N/A | N/A | Not Changd |
| Filter Changed | | Client Info | | N/A | N/A | Not Changd |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >150 | 2 | <1 | 9 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >10 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m | >100 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >50 | <1 | 1 | 1 |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >50 | <1 | 0 | 0 |
| Potassium | ppm | ASTM D5185m | >20 | <1 | 0 | 0 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|-------|
| Sodium | ppm | ASTM D5185m | | <1 | 2 | <1 |
| Boron | ppm | ASTM D5185m | 0 | 4 | 4 | 3 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | 2 | <1 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Magnesium | ppm | ASTM D5185m | 0 | 9 | 11 | 8 |
| Calcium | ppm | ASTM D5185m | 0 | 144 | 141 | 234 |
| Phosphorus | ppm | ASTM D5185m | 0 | 13 | 14 | 7 |
| Zinc | ppm | ASTM D5185m | 0 | 8 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m | 4046 | 959 | 880 | 1080 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.094 | 0.09 | 0.089 |
| Visc @ 40°C | cSt | ASTM D445 | 143 | 150 | 147 | 146 |

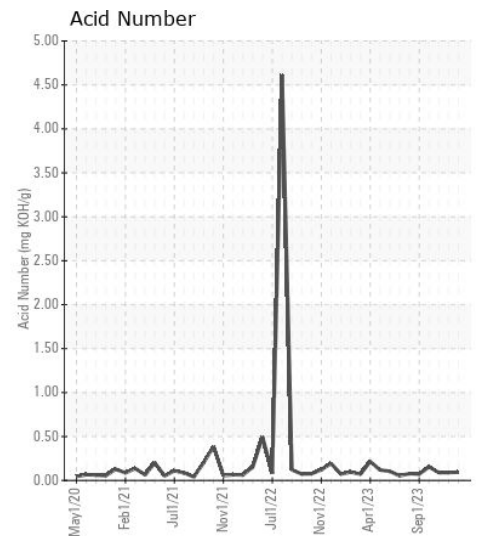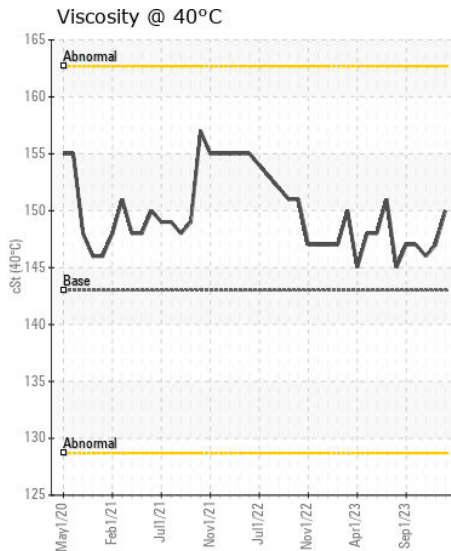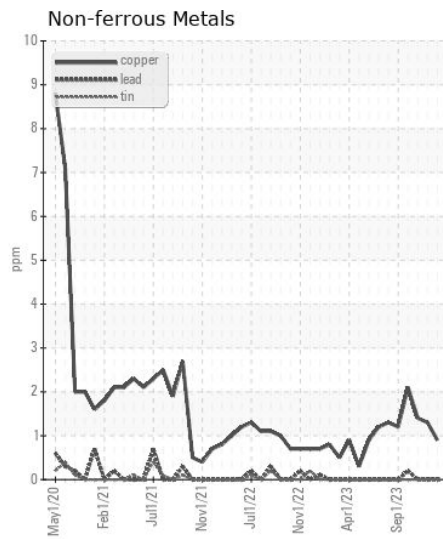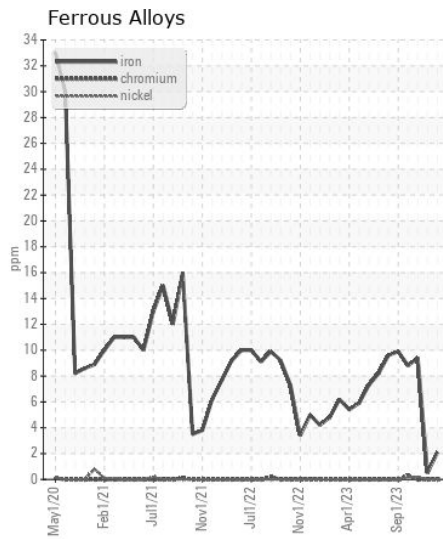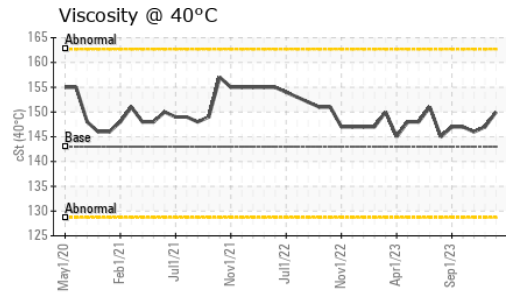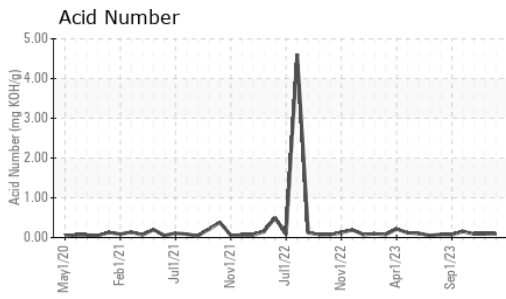

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0058703 **Recieved** : 17 Jan 2024
Lab Number : 06063745 **Diagnosed** : 19 Jan 2024
Unique Number : 10835127 **Diagnostician** : Wes Davis
Test Package : MAR 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003
 Contact: MVJPA
 mvjpa@ingrambarga.com
 T:
 F: (615)695-3697