



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 310E 1DW310EXPNF713863
Component
Front Differential
Fluid
JOHN DEERE HY-GARD HYD/TRANS (24 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0199331	JR0183874	JR0174827
Sample Date		Client Info		17 Jan 2024	24 Aug 2023	23 May 2023
Machine Age	hrs	Client Info		1969	1447	944
Oil Age	hrs	Client Info		978	959	488
Filter Age	hrs	Client Info		978	959	488
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		143	101	117
Iron	ppm	ASTM D5185m	>500	211	166	121
Chromium	ppm	ASTM D5185m	>10	1	1	1
Nickel	ppm	ASTM D5185m	>10	<1	2	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>25	2	5	3
Lead	ppm	ASTM D5185m	>25	0	<1	0
Copper	ppm	ASTM D5185m	>100	142	▲ 119	67
Tin	ppm	ASTM D5185m	>10	5	5	5
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	11	11	11
Potassium	ppm	ASTM D5185m	>20	4	4	2
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		8	10	12
Boron	ppm	ASTM D5185m	6	47	57	48
Barium	ppm	ASTM D5185m	0	4	4	0
Molybdenum	ppm	ASTM D5185m	0	5	7	6
Manganese	ppm	ASTM D5185m		4	4	4
Magnesium	ppm	ASTM D5185m	145	83	87	88
Calcium	ppm	ASTM D5185m	3570	3171	3687	3531
Phosphorus	ppm	ASTM D5185m	1290	1042	1117	1065
Zinc	ppm	ASTM D5185m	1640	1232	1385	1347
Sulfur	ppm	ASTM D5185m		3554	4519	4107
Visc @ 40°C	cSt	ASTM D445	57.0	55.4	56.1	57.5

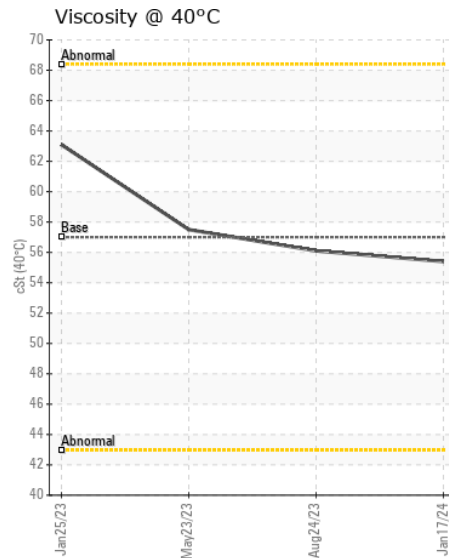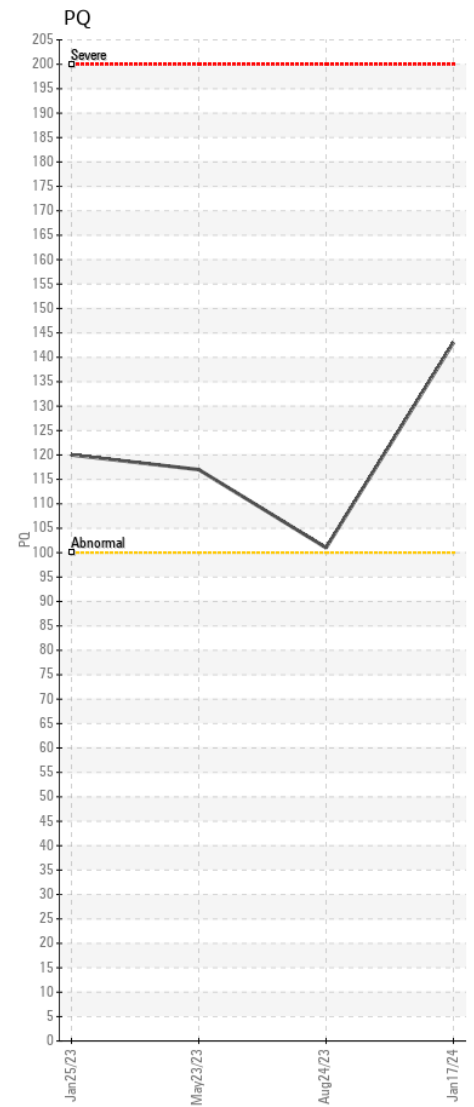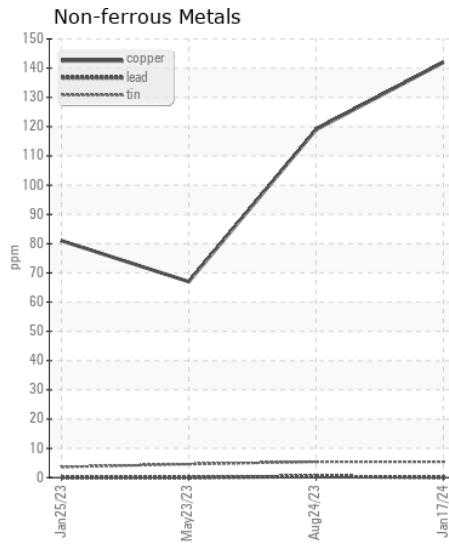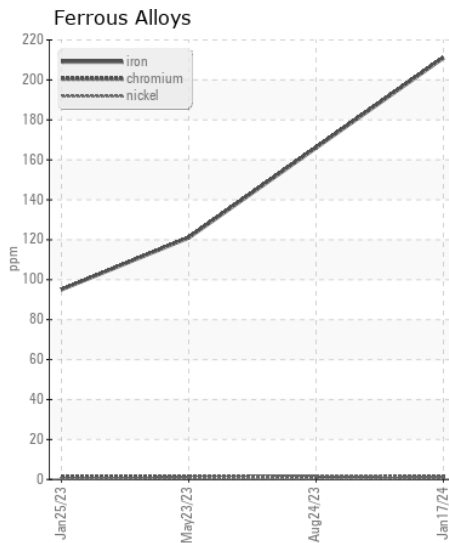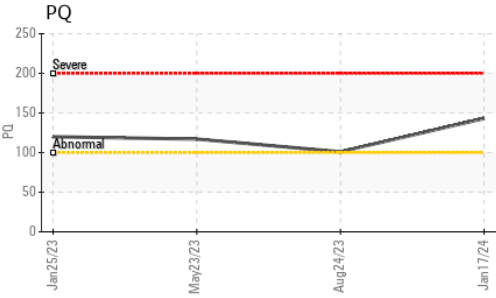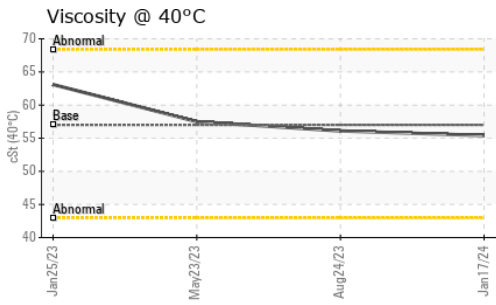

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0199331 **Received** : 18 Jan 2024
Lab Number : 06065158 **Diagnosed** : 22 Jan 2024
Unique Number : 10836540 **Diagnostician** : Sean Felton
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

B & S SITE DEVELOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136

Contact: DANNY HUFF
 dhuff@bandssite.com

T: (540)270-3203
 F: (703)753-0605