



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
413054
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0102127	GFL0087924	---
Sample Date		Client Info		15 Jan 2024	31 Oct 2023	---
Machine Age	hrs	Client Info		1957	1957	---
Oil Age	hrs	Client Info		600	600	---
Filter Age	hrs	Client Info		600	600	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	10	13	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	<1	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	0	<1	---
Aluminum	ppm	ASTM D5185m	>20	3	9	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	14	72	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	3	6	---
Potassium	ppm	ASTM D5185m	>20	7	25	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>4	0.2	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	7.9	9.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.9	23.7	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	---
Boron	ppm	ASTM D5185m	0	3	22	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	60	57	40	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	1010	959	538	---
Calcium	ppm	ASTM D5185m	1070	1081	1614	---
Phosphorus	ppm	ASTM D5185m	1150	1069	778	---
Zinc	ppm	ASTM D5185m	1270	1245	935	---
Sulfur	ppm	ASTM D5185m	2060	3080	2344	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.4	22.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.1	8.3	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	12.8	---

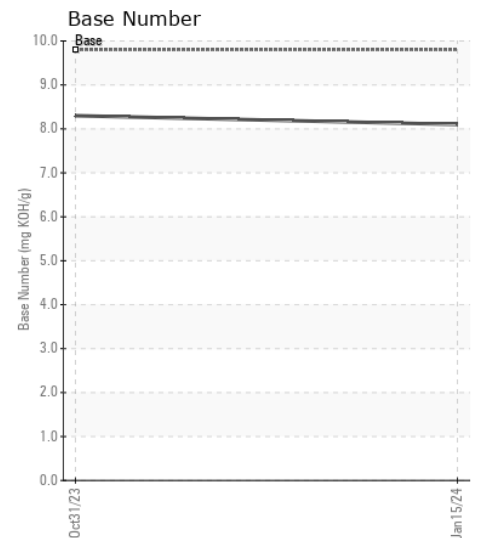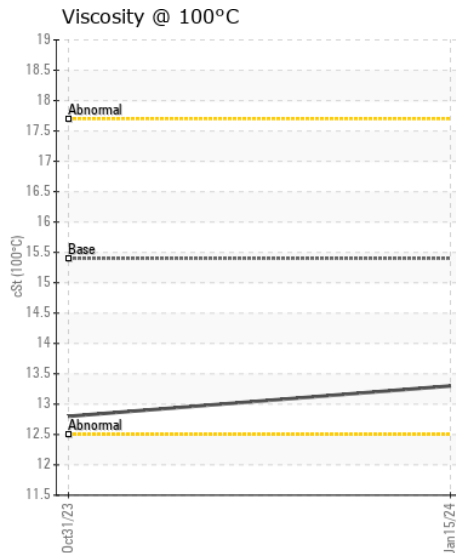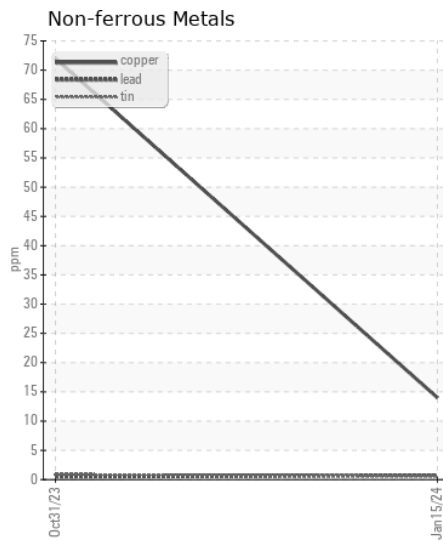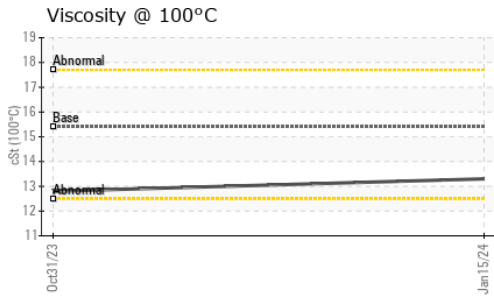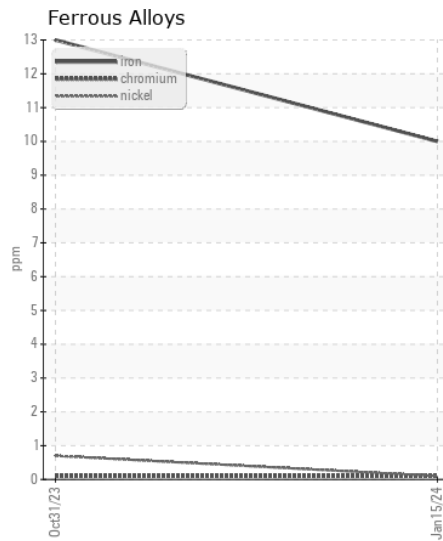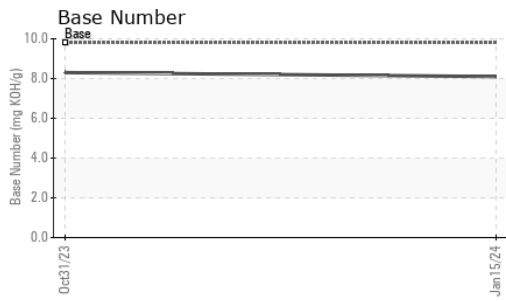

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0102127 **Received** : 19 Jan 2024
Lab Number : 06065330 **Diagnosed** : 20 Jan 2024
Unique Number : 10836712 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 960 - West Central HC JacksonvilleHC
 2263 State Hwy 104
 Jacksonville, IL
 US 62656
 Contact: David Bradshaw
 david.bradshaw@gflenv.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)