



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 35G 1FF035GXVMK295065

Component
Hydraulic System

Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0194231	JR0138492	---
Sample Date		Client Info		18 Jan 2024	15 Jan 2023	---
Machine Age	hrs	Client Info		435	234	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	12	7	---
Iron	ppm	ASTM D5185m	>32	0	4	---
Chromium	ppm	ASTM D5185m	>9	0	2	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>9	0	0	---
Lead	ppm	ASTM D5185m	>28	0	0	---
Copper	ppm	ASTM D5185m	>50	2	<1	---
Tin	ppm	ASTM D5185m	>5	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	<1	3	---
Potassium	ppm	ASTM D5185m	>20	0	0	---
Water		WC Method	>0.075	NEG	NEG	---
Particles >4µm		ASTM D7647	>80000	4737	9534	---
Particles >6µm		ASTM D7647	>20000	1006	1464	---
Particles >14µm		ASTM D7647	>640	145	50	---
Particles >21µm		ASTM D7647	>160	52	7	---
Particles >38µm		ASTM D7647	>40	4	0	---
Particles >71µm		ASTM D7647	>10	0	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	19/17/14	20/18/13	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	0	1	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	<1	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m		<1	<1	---
Calcium	ppm	ASTM D5185m		2	133	---
Phosphorus	ppm	ASTM D5185m		564	644	---
Zinc	ppm	ASTM D5185m		28	▲ 790	---
Sulfur	ppm	ASTM D5185m		143	1870	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.07	0.10	---
Visc @ 40°C	cSt	ASTM D445		46.1	46.1	---

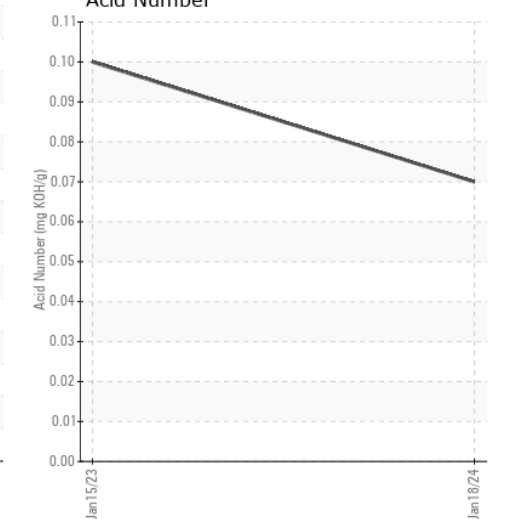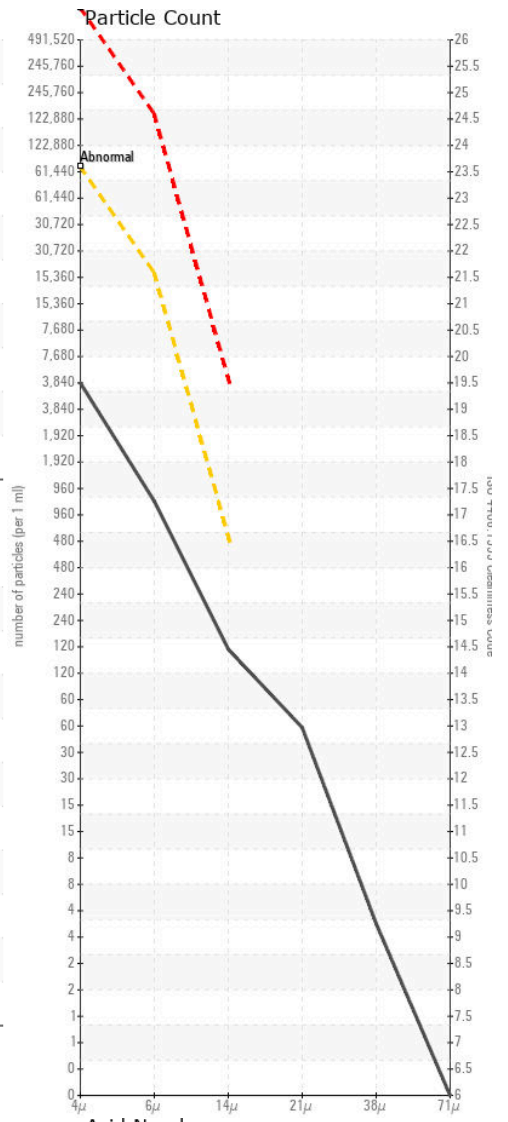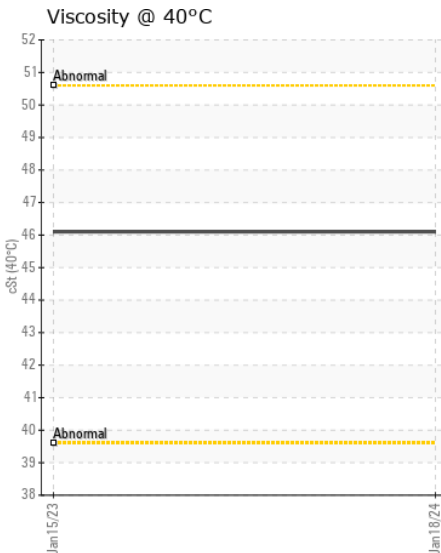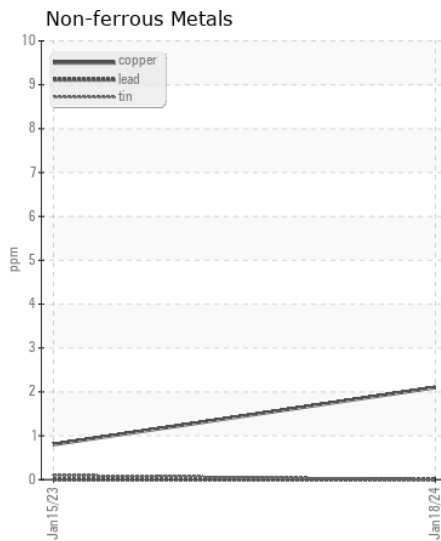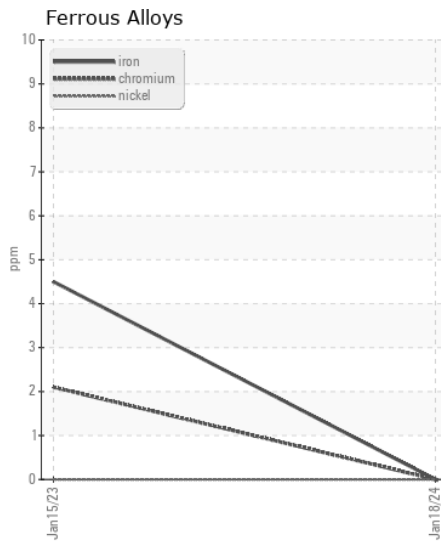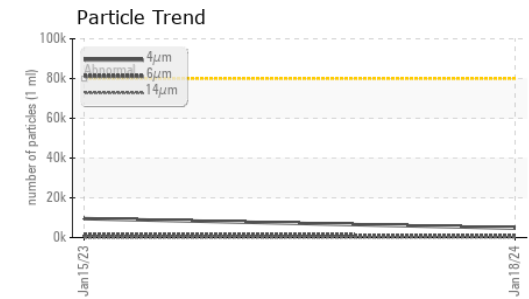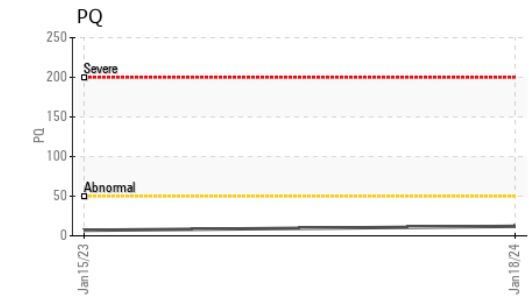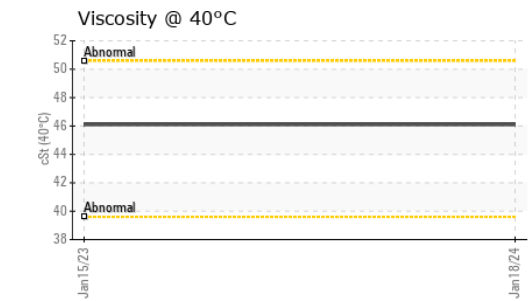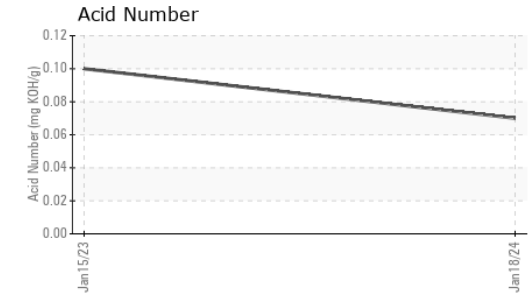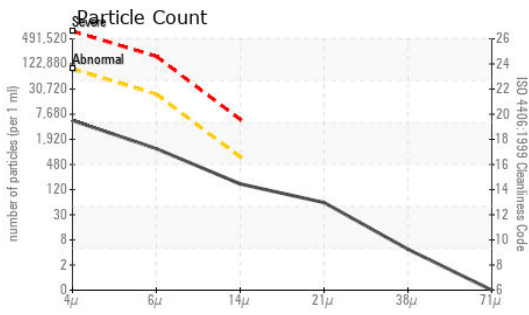

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0194231 **Received** : 19 Jan 2024
Lab Number : 06065526 **Diagnosed** : 23 Jan 2024
Unique Number : 10836908 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409

Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM

T: (336)668-2762
 F: (336)665-9556