



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
050-0031

Component
Diesel Engine

Fluid
SCHAEFFER SUPREME 7000 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0868393	WC0697999	WC0424340
Sample Date		Client Info		21 Dec 2023	20 Jun 2022	17 Feb 2020
Machine Age	hrs	Client Info		2136	1653	1025
Oil Age	hrs	Client Info		0	0	50
Filter Age	hrs	Client Info		0	0	50
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	19	37	37
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	<1	<1
Aluminum	ppm	ASTM D5185m	>20	3	3	4
Lead	ppm	ASTM D5185m	>40	<1	<1	1
Copper	ppm	ASTM D5185m	>330	0	2	7
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	8	9
Potassium	ppm	ASTM D5185m	>20	<1	0	4
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.3	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.5	9.0	7.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.4	19.4	17.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	<1	3
Boron	ppm	ASTM D5185m		80	79	84
Barium	ppm	ASTM D5185m		0	4	<1
Molybdenum	ppm	ASTM D5185m	50	72	78	77
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	1000	23	24	88
Calcium	ppm	ASTM D5185m	1400	2140	2329	2140
Phosphorus	ppm	ASTM D5185m	985	1077	1021	1134
Zinc	ppm	ASTM D5185m	1060	1235	1252	1142
Sulfur	ppm	ASTM D5185m	4000	5018	5898	4412
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	14.5	12.6
Base Number (BN)	mg KOH/g	ASTM D2896	10	6.7	7.5	7.6
Visc @ 100°C	cSt	ASTM D445	15	14.4	14.4	14.5

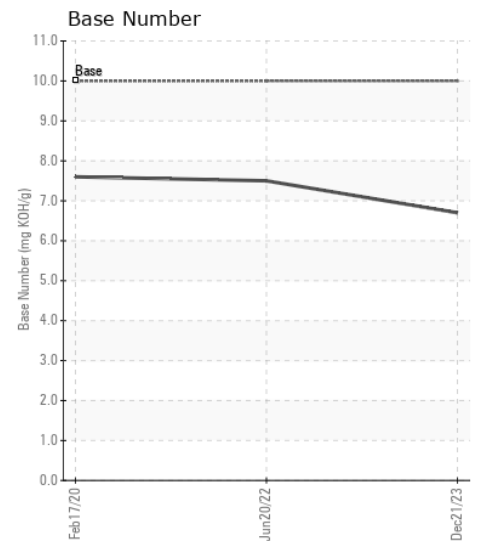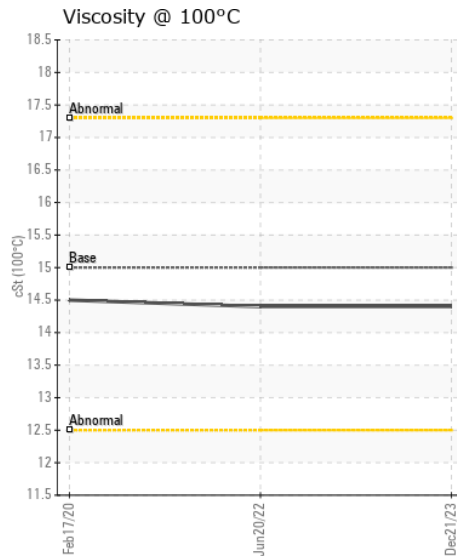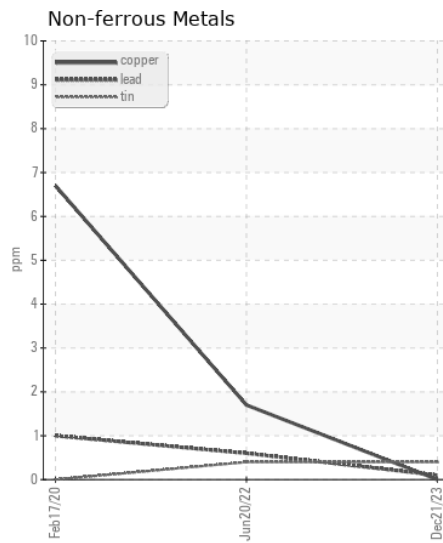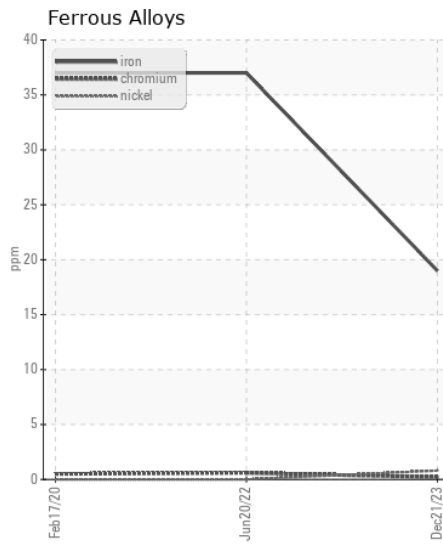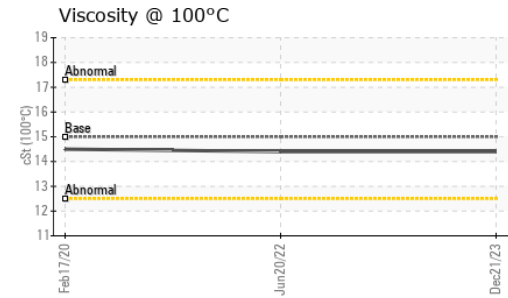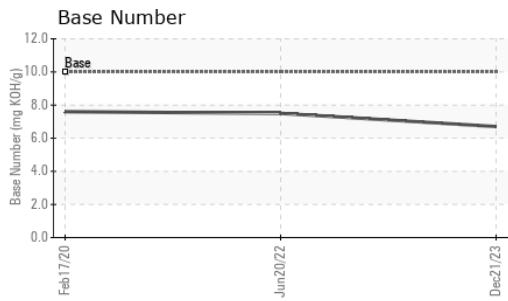

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0868393 **Received** : 30 Jan 2024
Lab Number : 06073595 **Diagnosed** : 30 Jan 2024
Unique Number : 10850272 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SHIMMICK CONSTRUCTION
 5535 TRAILHEAD DRIVE
 CHATTANOOGA, TN
 US 37415
 Contact: DANIEL LISELLA
 daniel.lisella@shimmick.com

T:
F: