



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[467711 DCF]
Machine Id
VOLVO EC350 310329
Component
Hydraulic System
Fluid
VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP439086	VCP308242	VCP283322
Sample Date		Client Info		25 Jan 2024	28 Apr 2021	06 Jul 2020
Machine Age	hrs	Client Info		6518	3834	3070
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>25	15	7	4
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>20	2	1	<1
Lead	ppm	ASTM D5185m	>20	<1	<1	<1
Copper	ppm	ASTM D5185m	>150	22	27	22
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>50	6	4	4
Potassium	ppm	ASTM D5185m	>20	8	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>40000	3293	---	23663
Particles >6µm		ASTM D7647	>10000	819	---	4436
Particles >14µm		ASTM D7647	>2500	95	---	139
Particles >21µm		ASTM D7647	>640	34	---	29
Particles >38µm		ASTM D7647	>160	3	---	2
Particles >71µm		ASTM D7647	>40	0	---	0
Oil Cleanliness		ISO 4406 (c)	>22/20/18	19/17/14	---	22/19/14
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	<1	<1
Boron	ppm	ASTM D5185m	14	3	2	1
Barium	ppm	ASTM D5185m	0.0	0	0	<1
Molybdenum	ppm	ASTM D5185m	0.0	5	<1	<1
Manganese	ppm	ASTM D5185m	0.0	0	0	<1
Magnesium	ppm	ASTM D5185m	2.6	11	3	3
Calcium	ppm	ASTM D5185m	49	123	81	71
Phosphorus	ppm	ASTM D5185m	354	307	365	348
Zinc	ppm	ASTM D5185m	419	400	426	443
Sulfur	ppm	ASTM D5185m	3719	2214	1581	1540
Acid Number (AN)	mg KOH/g	ASTM D8045		0.39	0.414	0.429
Visc @ 40°C	cSt	ASTM D445	46	43.8	42.4	42.2

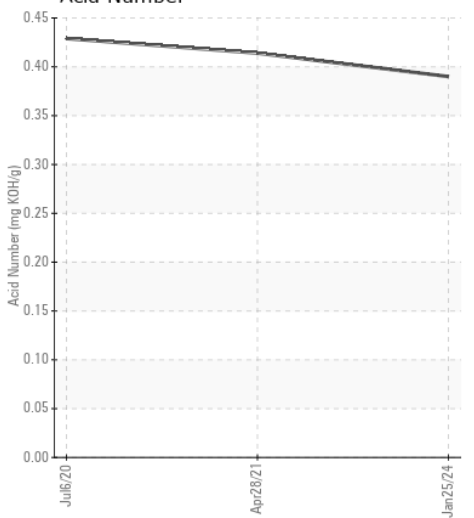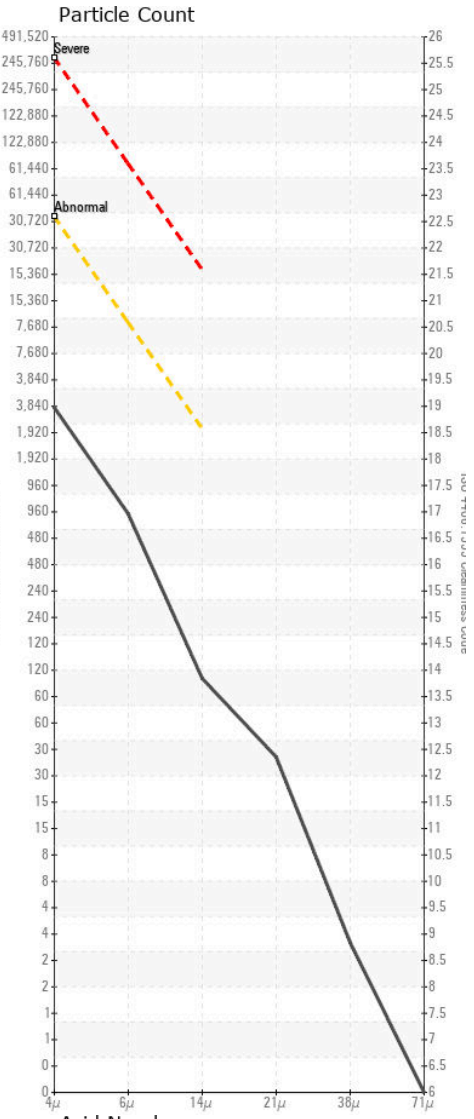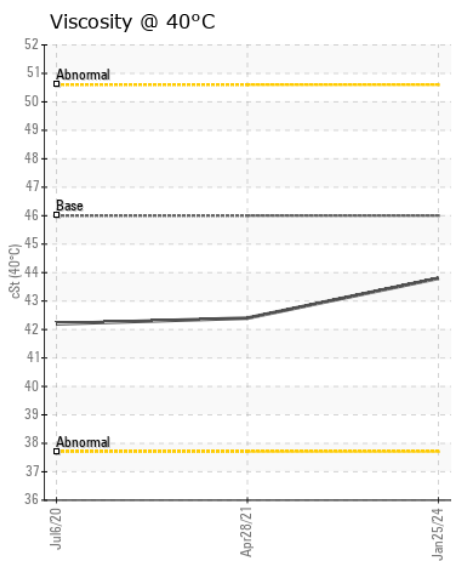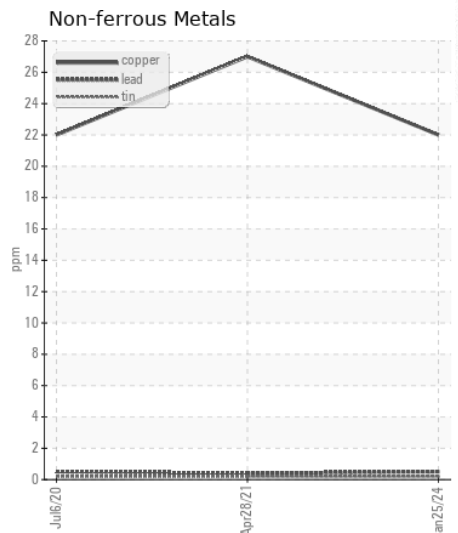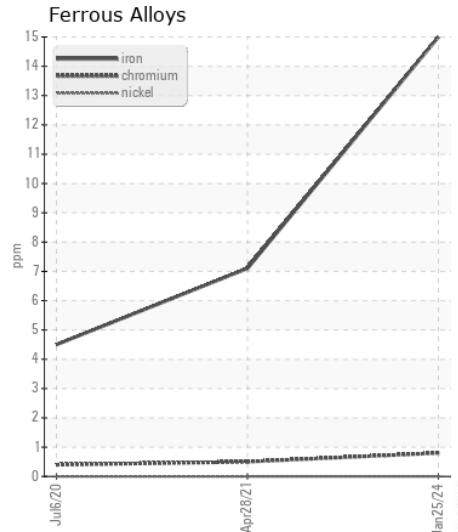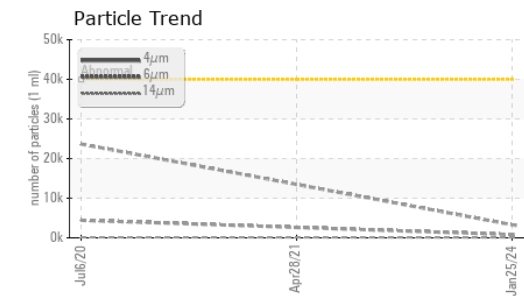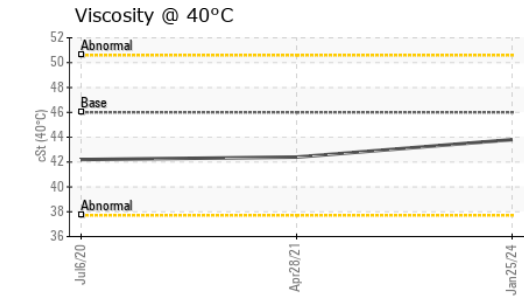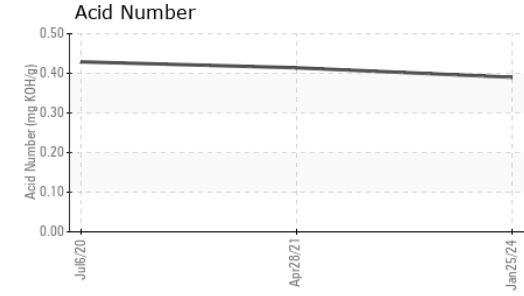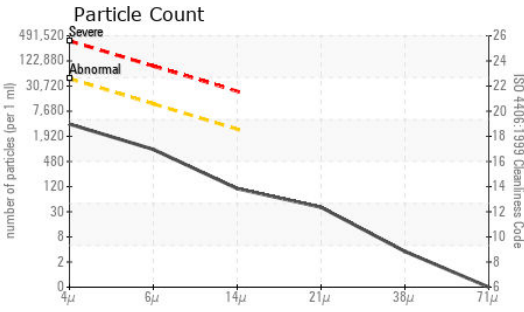

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP439086 **Received** : 30 Jan 2024
Lab Number : 06074637 **Diagnosed** : 31 Jan 2024
Unique Number : 10856728 **Diagnostician** : Wes Davis
Test Package : MOB 2

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: KENNY HANEY
 khaney@flaglerce.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)