



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
SAFETY FIRST
Component
Port Main Engine
Fluid
MOBIL MOBILGARD 410 NC (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MWM730202	MWM730218	MWM730211
Sample Date		Client Info		25 Jan 2024	30 Oct 2023	08 Sep 2023
Machine Age	hrs	Client Info		0	0	27635
Oil Age	hrs	Client Info		0	0	750
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	10	3	7
Chromium	ppm	ASTM D5185m	>8	<1	<1	0
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>3	6	9	5
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	3	2	4
Lead	ppm	ASTM D5185m	>18	2	0	2
Copper	ppm	ASTM D5185m	>80	8	3	4
Tin	ppm	ASTM D5185m	>14	1	0	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	5	5	4
Potassium	ppm	ASTM D5185m	>20	3	0	0
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.5	9.9	11.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.0	20.7	22.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	4	2	<1
Boron	ppm	ASTM D5185m		144	83	68
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		73	55	78
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		701	619	607
Calcium	ppm	ASTM D5185m		1657	1651	1877
Phosphorus	ppm	ASTM D5185m		754	665	737
Zinc	ppm	ASTM D5185m	10	870	840	921
Sulfur	ppm	ASTM D5185m		2976	2897	3250
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.7	16.0	17.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.0	8.1	7.8	7.0
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	14.1	14.3

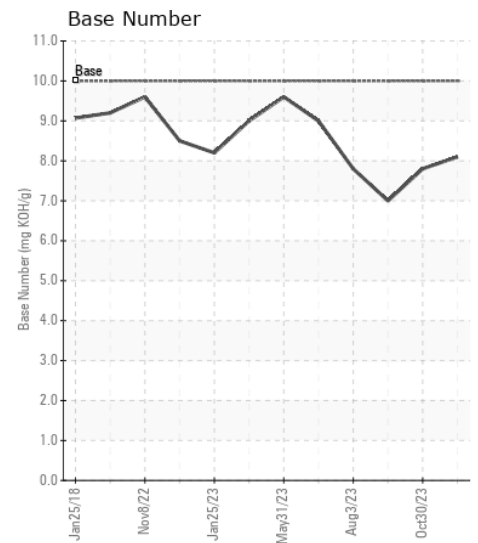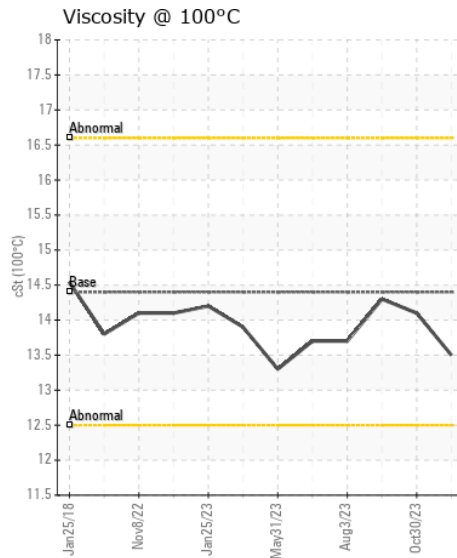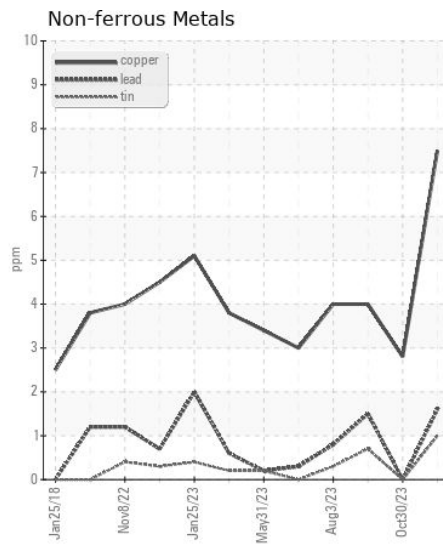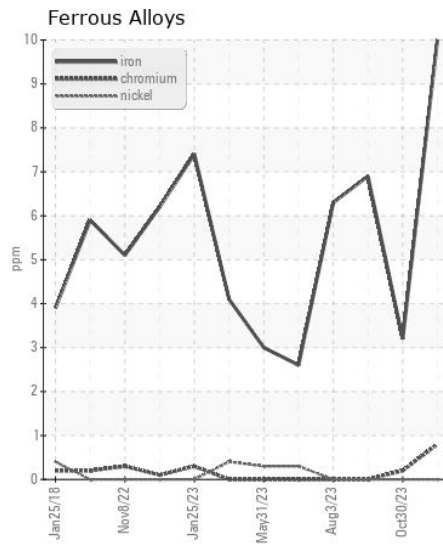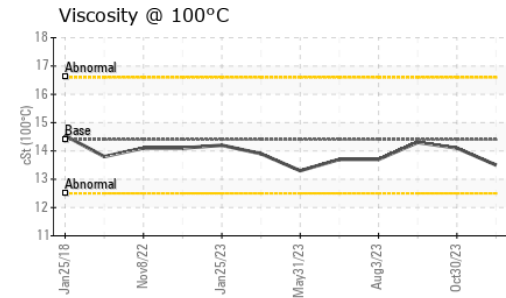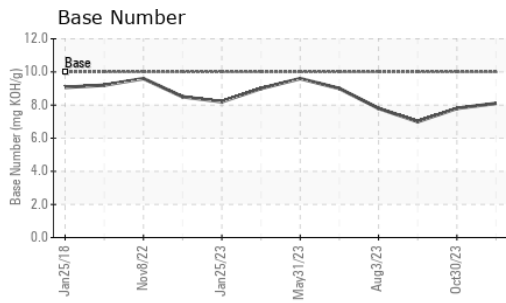

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MWM730202 **Received** : 31 Jan 2024
Lab Number : 06075356 **Diagnosed** : 01 Feb 2024
Unique Number : 10857447 **Diagnostician** : Don Baldrige
Test Package : MAR 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

AMERICAN COMMERCIAL LINES
 PO BOX 610, 1701 E. MARKET STREET
 JEFFERSONVILLE, IN
 US 47130
 Contact: RONALD SCHNEIDER
 ronald.schneider@bargeacbl.com
 T:
 F: (812)288-1644