



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[GREENRIDGE CONT]
Machine Id
JOHN DEERE 700K 1T0700KXKJF331084
Component
Right Final Drive
Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0195171	JR0169060	JR0146880
Sample Date		Client Info		29 Jan 2024	14 Apr 2023	28 Dec 2022
Machine Age	hrs	Client Info		4983	4453	4285
Oil Age	hrs	Client Info		0	4453	315
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		N/A	None	Not Changd
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	81	33	30
Iron	ppm	ASTM D5185m	>750	224	49	41
Chromium	ppm	ASTM D5185m	>9	3	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	6	2	2
Lead	ppm	ASTM D5185m	>15	0	0	<1
Copper	ppm	ASTM D5185m	>40	<1	0	0
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	36	10	9
Potassium	ppm	ASTM D5185m	>20	4	<1	0
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	1	<1
Boron	ppm	ASTM D5185m	6	<1	0	2
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	3	1	1
Manganese	ppm	ASTM D5185m		2	1	<1
Magnesium	ppm	ASTM D5185m	145	128	107	100
Calcium	ppm	ASTM D5185m	3570	4180	3599	3465
Phosphorus	ppm	ASTM D5185m	1290	1312	1054	974
Zinc	ppm	ASTM D5185m	1640	1461	1314	1235
Sulfur	ppm	ASTM D5185m		5222	4479	3947
Visc @ 40°C	cSt	ASTM D445	57.0	52.0	54.3	55.5

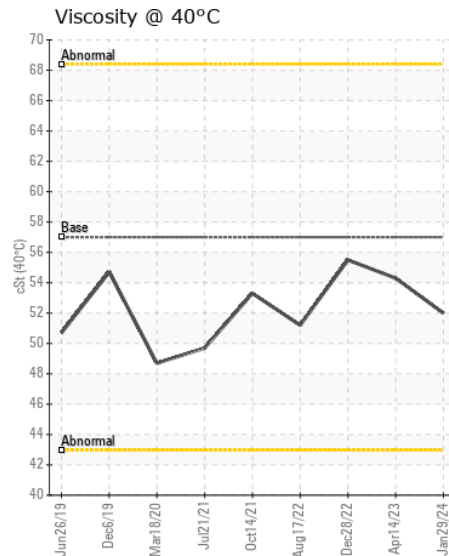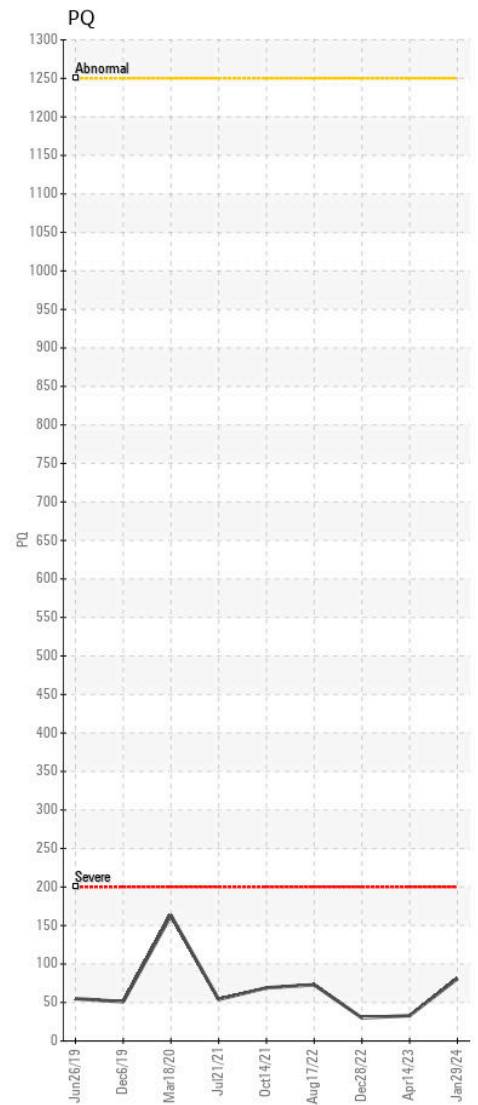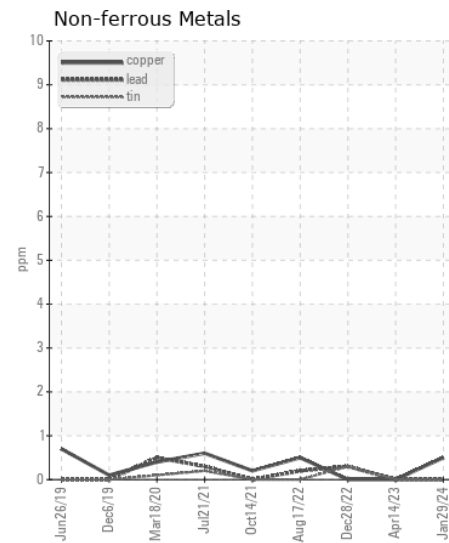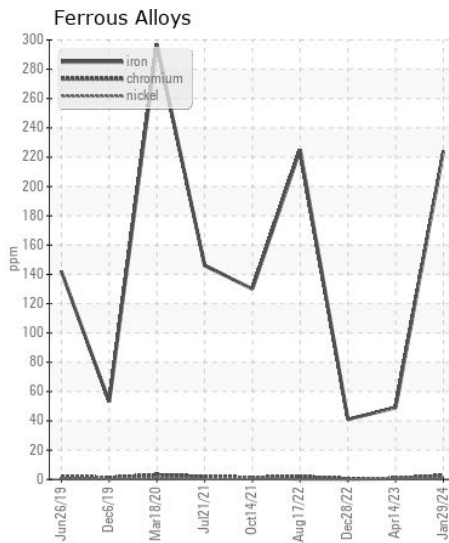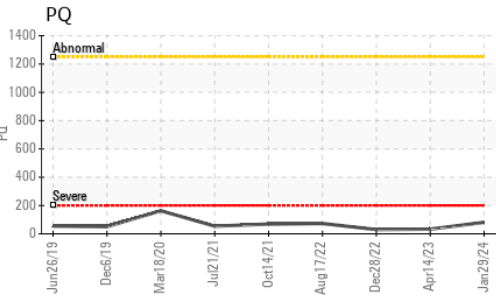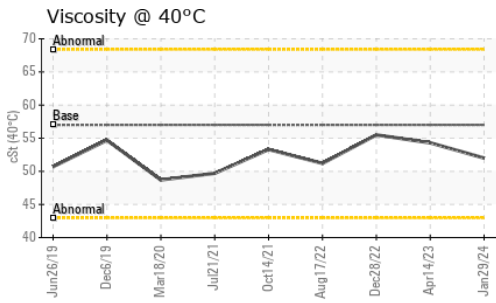

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0195171 **Received** : 31 Jan 2024
Lab Number : 06076077 **Diagnosed** : 01 Feb 2024
Unique Number : 10858168 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - STEPHENSON
 245 YARDMASTER COURT
 STEPHENSON, VA
 US 22656-1761
 Contact: PHIL DAUGHERTY
 pdaugherty@jamesriverequipment.com
 T: x:
 F: (540)693-2588