



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**920023**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0107503</b>	GFL0072499	---
Sample Date		Client Info		<b>25 Jan 2024</b>	28 Jul 2023	---
Machine Age	hrs	Client Info		<b>27250</b>	26689	---
Oil Age	hrs	Client Info		<b>561</b>	605	---
Filter Age	hrs	Client Info		<b>561</b>	605	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	<b>8</b>	27	---
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	▲ 36	---
Lead	ppm	ASTM D5185m	>45	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>85	<b>2</b>	2	---
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	<b>29</b>	7	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	1	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.7	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.5</b>	11.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.6</b>	21.8	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	7	---
Boron	ppm	ASTM D5185m	0	<b>38</b>	36	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	60	<b>54</b>	74	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	1010	<b>870</b>	898	---
Calcium	ppm	ASTM D5185m	1070	<b>1105</b>	1331	---
Phosphorus	ppm	ASTM D5185m	1150	<b>920</b>	944	---
Zinc	ppm	ASTM D5185m	1270	<b>1052</b>	1244	---
Sulfur	ppm	ASTM D5185m	2060	<b>2688</b>	3772	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.1</b>	17.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.4</b>	6.8	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	13.3	---

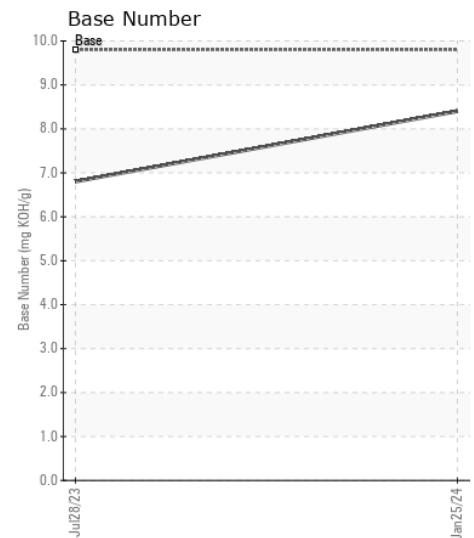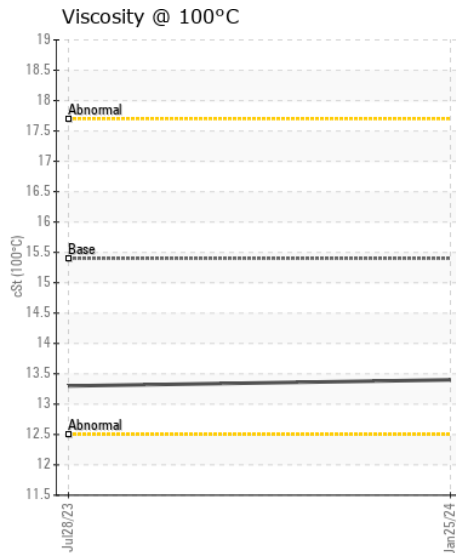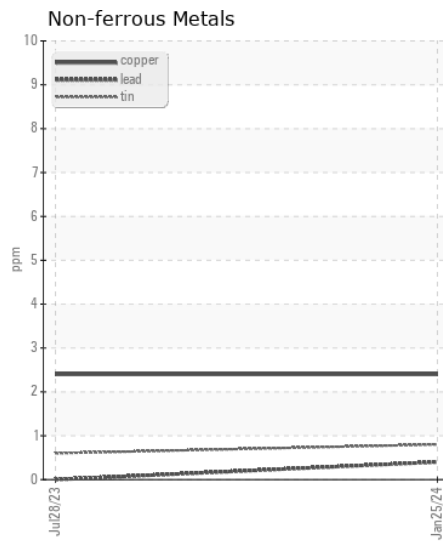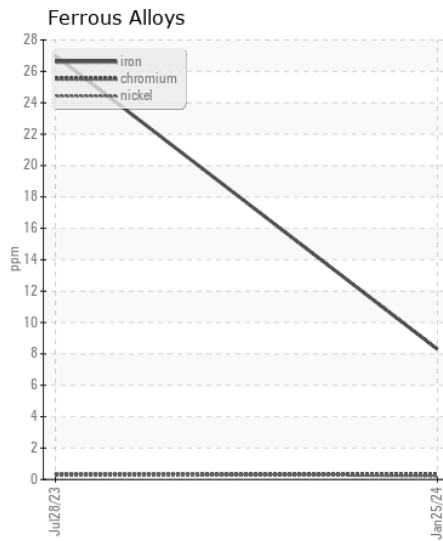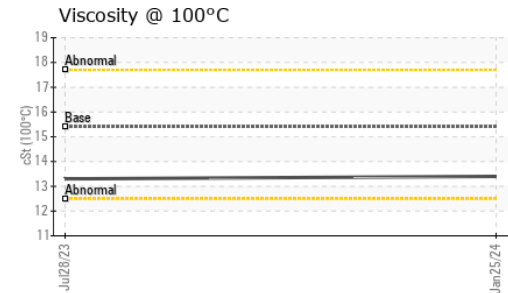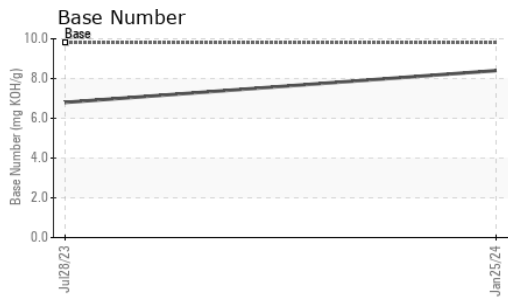

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0107503 **Received** : 31 Jan 2024  
**Lab Number** : 06076336 **Diagnosed** : 01 Feb 2024  
**Unique Number** : 10858427 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 912 - Fort Atkinson HC**  
 1215 Klement St.  
 Fort Atkinson, WI  
 US 53538  
 Contact: LEONARD KOZLEUCHAR  
 leonard.kozleuchar@gflenv.com  
 T: (262)210-6528  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)