



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[FL-813 PCE-PK1584]
 Machine Id
BEECH B300 250LH (S/N PCE-PK1584)
 Component
Left Turbine
 Fluid
BP TURBO OIL 2380 (12 QTS)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: FL-813 PCE-PK1584)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GF0001479	GF0000652	GF0000278
Sample Date		Client Info		30 Jan 2024	25 Jan 2022	08 Feb 2021
TSN	hrs	Client Info		1808	1407	1320
TSO	hrs	Client Info		1808	1407	0
Oil Age	hrs	Client Info		1808	1407	1320
Filter Age	hrs	Client Info		928	527	440
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Not Changed	Not Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>15	0	0	0
Chromium	ppm	ASTM D5185m	>4	<1	0	0
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	<1	0
Lead	ppm	ASTM D5185m		0	0	0
Copper	ppm	ASTM D5185m	>5	<1	<1	0
Tin	ppm	ASTM D5185m	>5	0	<1	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	▲ MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>15	0	<1	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water		WC Method	>0.03	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.03	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	<1
Boron	ppm	ASTM D5185m	0	0	<1	<1
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	0	0	0	0
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	2500	2680	2536	2528
Zinc	ppm	ASTM D5185m	0	0	4	0
Sulfur	ppm	ASTM D5185m	0	0	0	120
Visc @ 40°C	cSt	ASTM D445	24.2	23.9	23.8	24.3

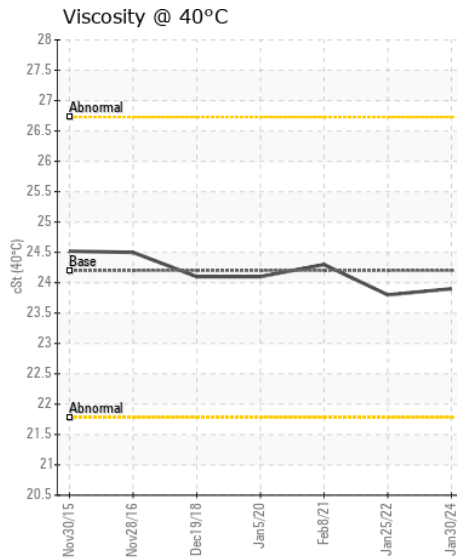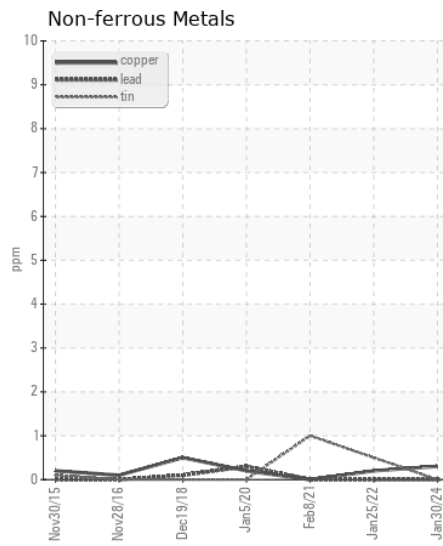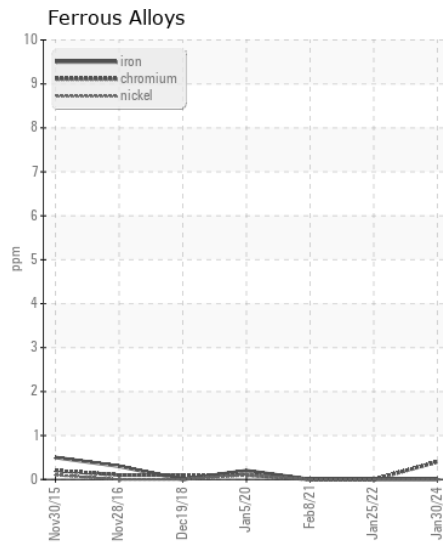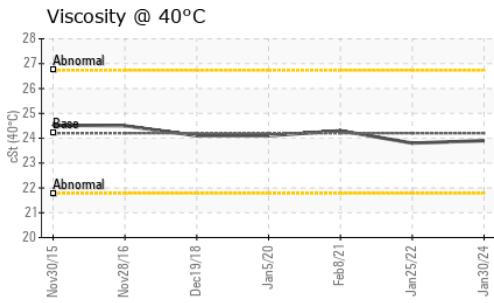

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GF0001479
Lab Number : 06077274
Unique Number : 10859365
Test Package : AVI 1

Received : 01 Feb 2024
Diagnosed : 03 Feb 2024
Diagnostician : Don Baldrige

STEVENS AEROSPACE AND DEFENSE SYSTEMS, LLC
 1280 THUNDERBIRD DR
 SMYRNA, TN
 US 37167
 Contact: PATRICK ISRAEL
 pisrael@stevensaerospace.com
 T: (615)365-2132
 F: (615)365-0966

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)