



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
625037
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0033141	IL0029453	IL0024677
Sample Date		Client Info		16 Dec 2023	17 Jun 2023	31 Dec 2022
Machine Age	mls	Client Info		79040	62925	47574
Oil Age	mls	Client Info		16115	15351	0
Filter Age	mls	Client Info		16115	15351	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	33	30	65
Chromium	ppm	ASTM D5185m	>20	<1	1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	7	8	6
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	2	2	2
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	6	8
Potassium	ppm	ASTM D5185m	>20	8	12	8
Fuel		WC Method	>5	<1.0	<1.0	▲ 3.2
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.4	0.8
Nitration	Abs/cm	*ASTM D7624	>20	11.4	9.0	11.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	21.8	22.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	2	0
Boron	ppm	ASTM D5185m	0	41	23	21
Barium	ppm	ASTM D5185m	0	0	0	1
Molybdenum	ppm	ASTM D5185m	0	100	52	38
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0	663	852	661
Calcium	ppm	ASTM D5185m		1187	1315	1344
Phosphorus	ppm	ASTM D5185m		714	987	745
Zinc	ppm	ASTM D5185m		889	1228	979
Sulfur	ppm	ASTM D5185m		2866	3710	2532
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.8	19.5	19.0
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	5.5	8.8	6
Visc @ 100°C	cSt	ASTM D445	14	12.5	12.4	▲ 12.2

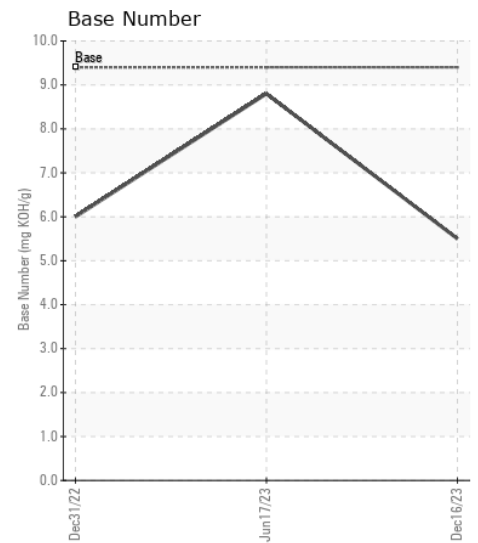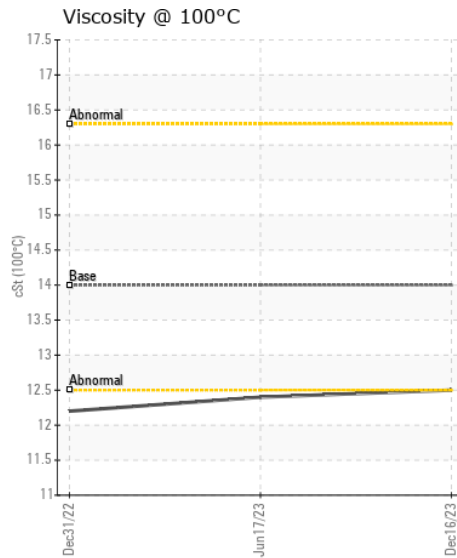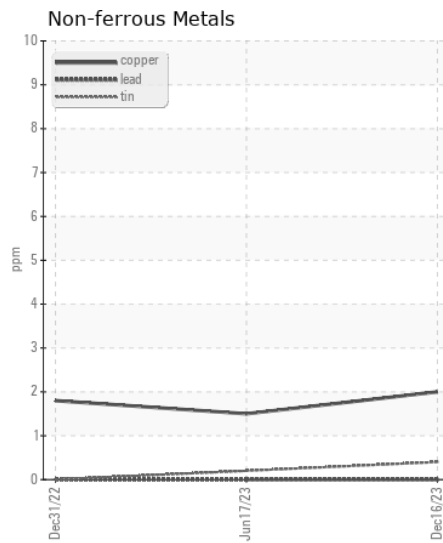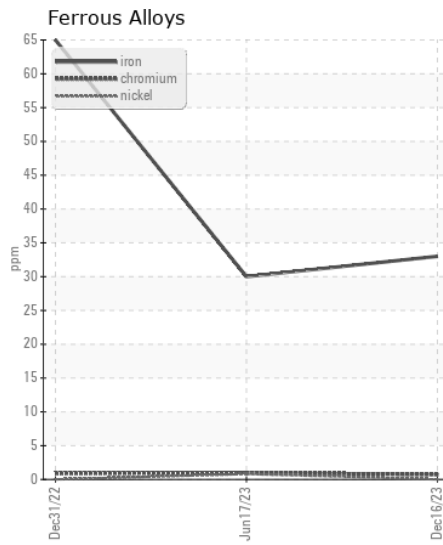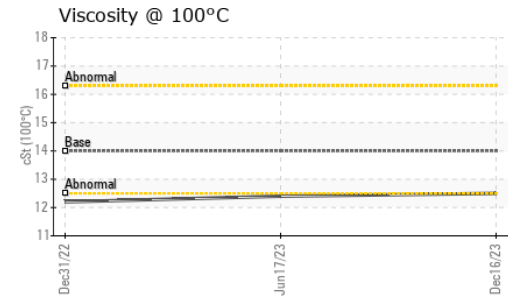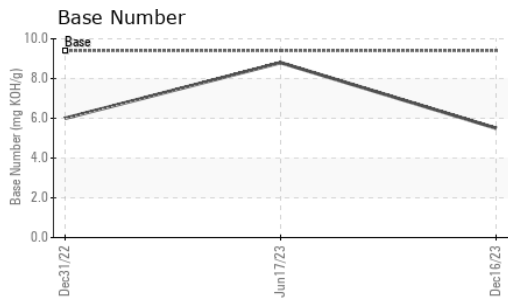

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0033141 **Received** : 01 Feb 2024
Lab Number : 06077471 **Diagnosed** : 02 Feb 2024
Unique Number : 10859562 **Diagnostician** : Wes Davis
Test Package : FLEET

RUSH TRUCK LEASING - BOISE IDEALEASE
 770 WEST AMITY ROAD
 BOISE, ID
 US 83705
 Contact: MATT BORCHARDT
 borchartm@rushenterprises.com
 T:
 F: (208)639-4859

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)