



McCLUNG-LOGAN
EQUIPMENT COMPANY, INC.

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W07014183-1]
Machine Id
VOLVO ECR145E 316277
Component
Swing Drive
Fluid
GEAR OIL SAE 75W80 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0000512	---	---
Sample Date		Client Info		26 Jan 2024	---	---
Machine Age	hrs	Client Info		560	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	147	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>50	20	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	23	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.25	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.25	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	400	0	---	---
Barium	ppm	ASTM D5185m	200	10	---	---
Molybdenum	ppm	ASTM D5185m	12	<1	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	12	1	---	---
Calcium	ppm	ASTM D5185m	150	6	---	---
Phosphorus	ppm	ASTM D5185m	1650	358	---	---
Zinc	ppm	ASTM D5185m	125	6	---	---
Sulfur	ppm	ASTM D5185m	22500	17394	---	---
Visc @ 40°C	cSt	ASTM D445	48	181	---	---

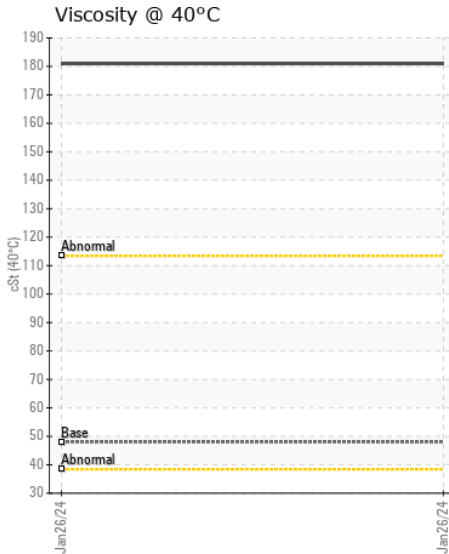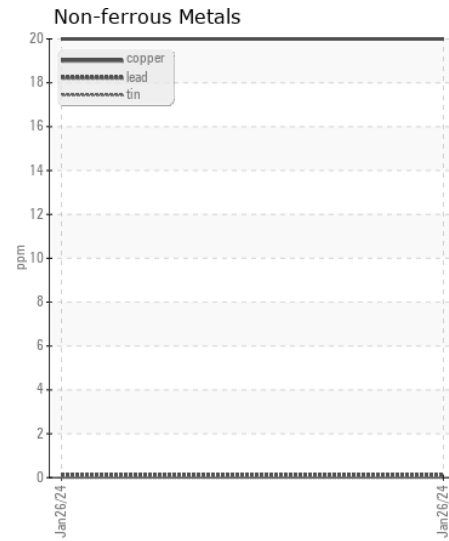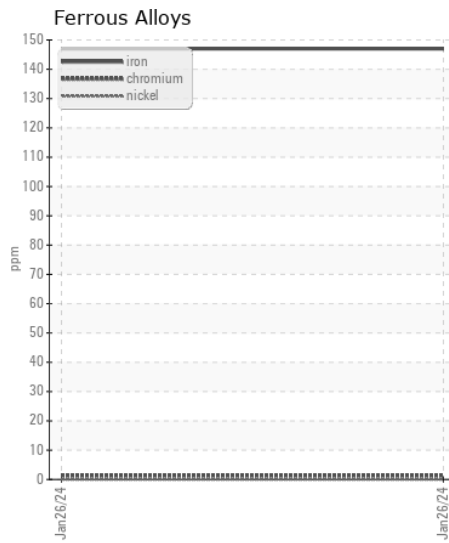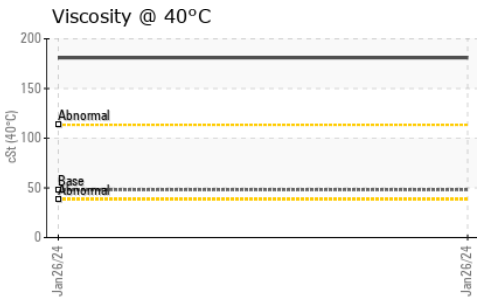

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0000512
Lab Number : 06077875
Unique Number : 10859966
Test Package : CONST

Received : 01 Feb 2024
Tested : 05 Feb 2024
Diagnosed : 05 Feb 2024 - Don Baldrige

MCCLUNG-LOGAN EQUIPMENT CO - RICHMOND
 1345 MOUNTAIN ROAD
 GLEN ALLEN, VA
 US 23060
 Contact: KYLE RATLIFFE
 KRATLIFFE@MCCLUNG-LOGAN.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (804)266-1611