



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO A45G 436634**  
Component  
**Drop Box**  
Fluid  
**VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP442800</b>	---	---
Sample Date		Client Info		<b>07 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>4358</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>241</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>30	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>30	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>30	<b>13</b>	---	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>4</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

Confirm oil type. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>1</b>	---	---
Boron	ppm	ASTM D5185m	111	<b>11</b>	---	---
Barium	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m	0.9	<b>9</b>	---	---
Manganese	ppm	ASTM D5185m	0.0	<b>3</b>	---	---
Magnesium	ppm	ASTM D5185m	39	<b>5</b>	---	---
Calcium	ppm	ASTM D5185m	93	<b>1567</b>	---	---
Phosphorus	ppm	ASTM D5185m	920	<b>994</b>	---	---
Zinc	ppm	ASTM D5185m	104	<b>720</b>	---	---
Sulfur	ppm	ASTM D5185m	20179	<b>10367</b>	---	---
Visc @ 40°C	cSt	ASTM D445	333	<b>140</b>	---	---

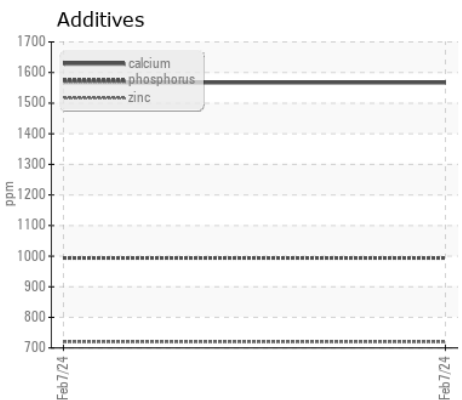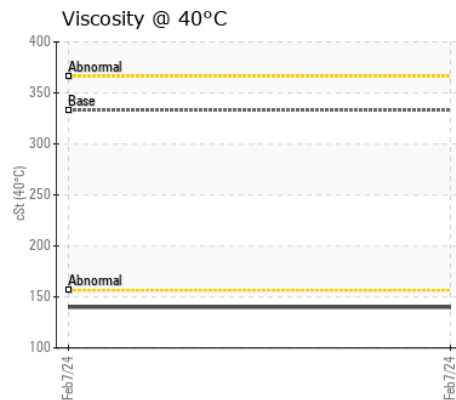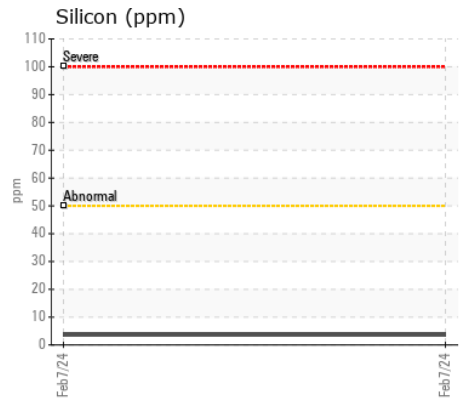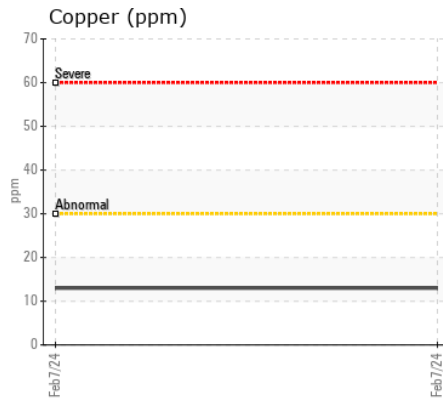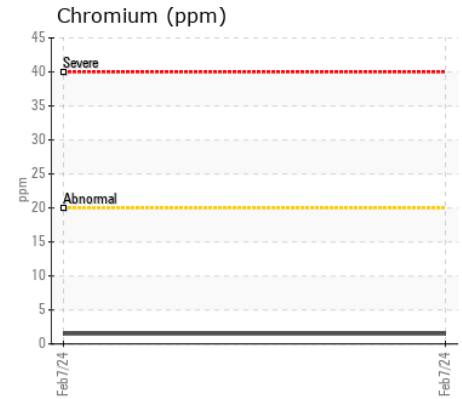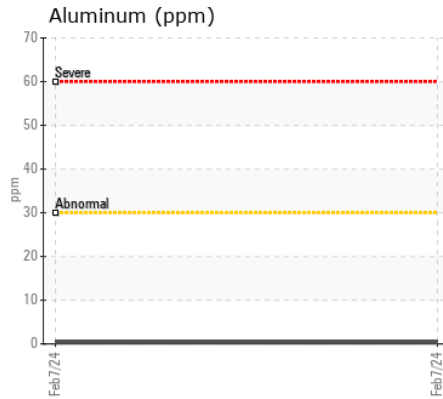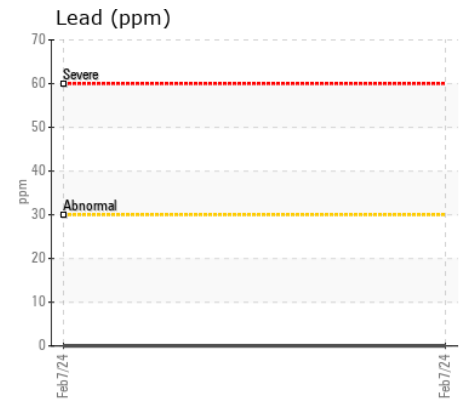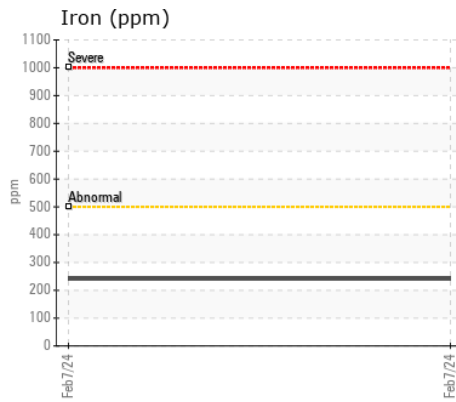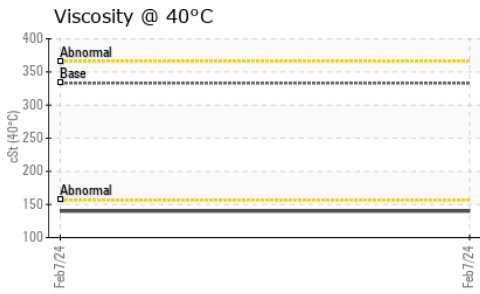

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP442800  
**Lab Number** : 06083935  
**Unique Number** : 10871380  
**Test Package** : MOB 1

**Received** : 08 Feb 2024  
**Tested** : 09 Feb 2024  
**Diagnosed** : 11 Feb 2024 - Don Baldrige

**ALTA EQUIPMENT COMPANY**  
 5151 DR MARTIN LUTHER KING BLVD  
 FORT MYERS, FL  
 US 33905  
 Contact: TODD LARK  
 tlark@altaequipfl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (239)481-3302