



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
G1
Component
Transmission (Auto)
Fluid
CASTROL TRANSYND 668 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0874275	---	---
Sample Date		Client Info		09 Jan 2024	---	---
Machine Age	hrs	Client Info		10415	---	---
Oil Age	hrs	Client Info		3355	---	---
Filter Age	hrs	Client Info		3355	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>220	67	---	---
Chromium	ppm	ASTM D5185m	>2	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>5	0	---	---
Aluminum	ppm	ASTM D5185m	>75	28	---	---
Lead	ppm	ASTM D5185m	>95	12	---	---
Copper	ppm	ASTM D5185m	>60	57	---	---
Tin	ppm	ASTM D5185m	>10	5	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	3	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		9	---	---
Boron	ppm	ASTM D5185m		100	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		15	---	---
Calcium	ppm	ASTM D5185m		521	---	---
Phosphorus	ppm	ASTM D5185m		604	---	---
Zinc	ppm	ASTM D5185m		83	---	---
Sulfur	ppm	ASTM D5185m		1599	---	---
Visc @ 40°C	cSt	ASTM D445	33	27.4	---	---

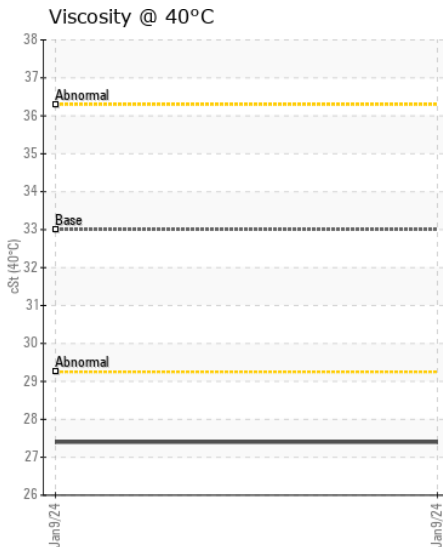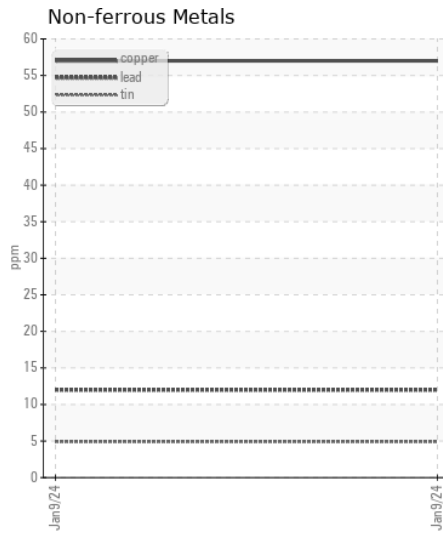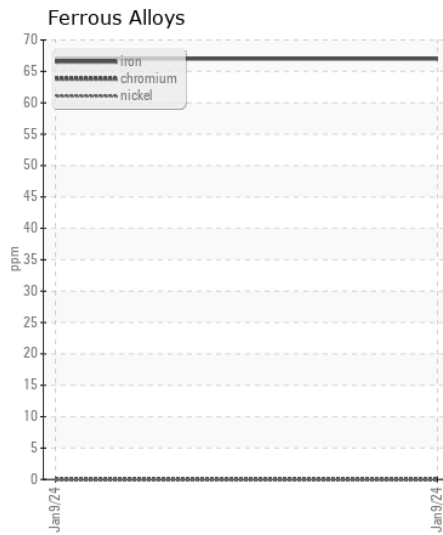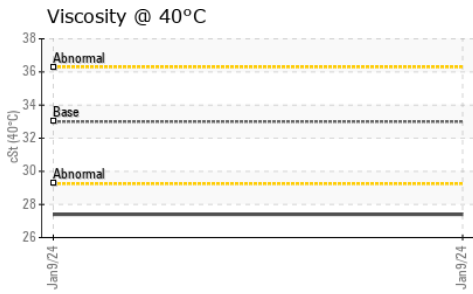

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0874275
Lab Number : 06084409
Unique Number : 10871854
Test Package : CONST

Received : 08 Feb 2024
Tested : 12 Feb 2024
Diagnosed : 12 Feb 2024 - Sean Felton

Apple Valley Waste - EHT Location
 6626 Delilah Road
 Egg Harbor Township, NJ
 US 08234
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: