



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[16W15395]**  
 Machine Id  
**JOHN DEERE 750K 1T0750KXJHF306604**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (7 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample Comment: 16W15395 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0196370</b>	JR0136136	JR0007179
Sample Date		Client Info		<b>07 Feb 2024</b>	28 Sep 2022	07 May 2019
Machine Age	hrs	Client Info		<b>4316</b>	3745	1897
Oil Age	hrs	Client Info		<b>571</b>	1854	450
Filter Age	hrs	Client Info		<b>571</b>	1854	450
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>44</b>	▲ 97	17
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	2	0
Nickel	ppm	ASTM D5185m	>5	<b>2</b>	5	2
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>7</b>	7	5
Lead	ppm	ASTM D5185m	>26	<b>3</b>	11	2
Copper	ppm	ASTM D5185m	>26	<b>25</b>	30	44
Tin	ppm	ASTM D5185m	>4	<b>1</b>	3	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>4</b>	11	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	<1
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.9	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.9</b>	14.2	9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.9</b>	33.0	25.5
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	<b>4</b>	6	0
Boron	ppm	ASTM D5185m		<b>141</b>	42	198
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>238</b>	210	224
Manganese	ppm	ASTM D5185m		<b>2</b>	2	<1
Magnesium	ppm	ASTM D5185m		<b>739</b>	695	713
Calcium	ppm	ASTM D5185m		<b>1402</b>	1568	1373
Phosphorus	ppm	ASTM D5185m		<b>787</b>	876	712
Zinc	ppm	ASTM D5185m		<b>1044</b>	1121	980
Sulfur	ppm	ASTM D5185m		<b>2673</b>	3014	2472
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.2</b>	29.5	22.7
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>8.2</b>	8.1	8.9
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.8	14.0

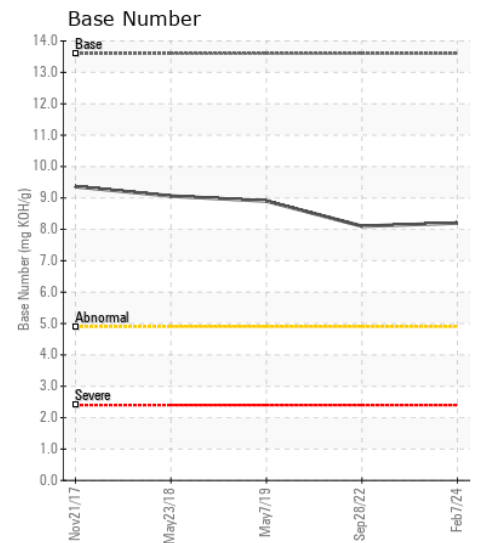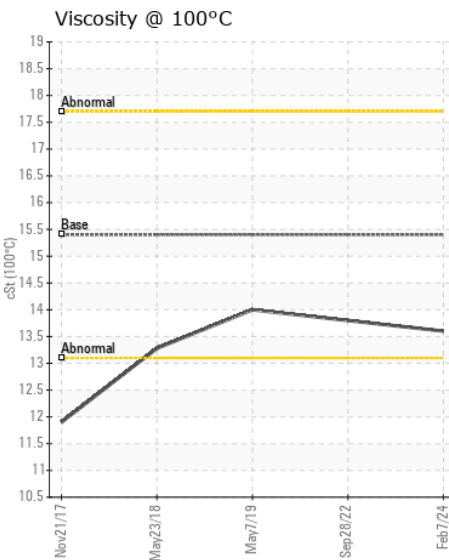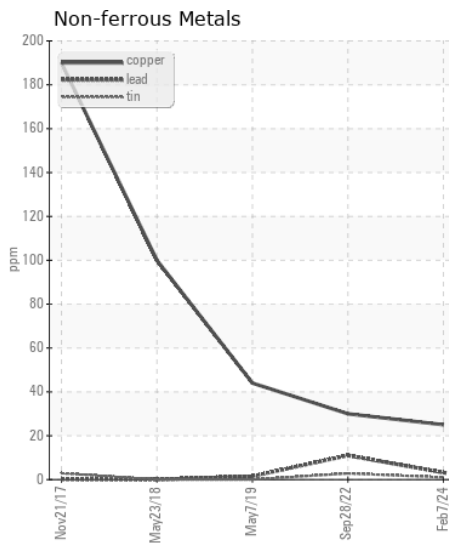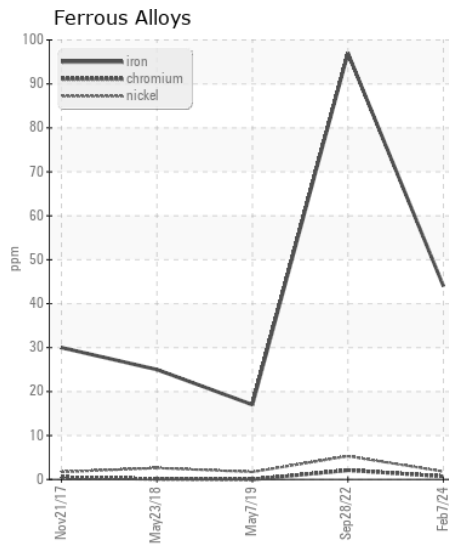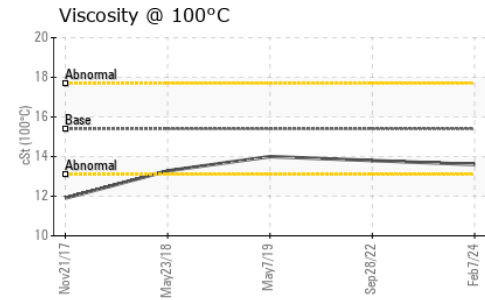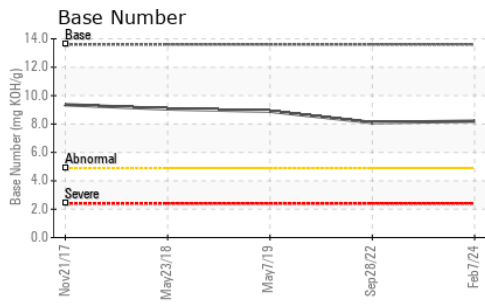

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0196370 **Received** : 09 Feb 2024  
**Lab Number** : 06084669 **Tested** : 12 Feb 2024  
**Unique Number** : 10872114 **Diagnosed** : 12 Feb 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: TBN )

**JRE - GARNER**  
 4161 AUBURN CHURCH RD  
 GARNER, NC  
 US 27529

Contact: RALEIGH SHOP  
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260  
 F: (919)779-5432