



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area
[RS036848]
 Machine Id
KOBELCO SK500LC-10 Y514605002
 Component
Right Swing Drive
 Fluid
GEAR OIL SAE 85W140 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP430560	---	---
Sample Date		Client Info		26 Jan 2024	---	---
Machine Age	hrs	Client Info		3629	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>400	38	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	<1	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>200	2	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










Moderate concentration of visible dirt/debris present in the oil.

Silicon	ppm	ASTM D5185m	>50	4	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	▲ MODER	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	400	31	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	2	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	12	20	---	---
Calcium	ppm	ASTM D5185m	150	1865	---	---
Phosphorus	ppm	ASTM D5185m	1650	819	---	---
Zinc	ppm	ASTM D5185m	125	811	---	---
Sulfur	ppm	ASTM D5185m	22500	15830	---	---
Visc @ 40°C	cSt	ASTM D445	368	177	---	---

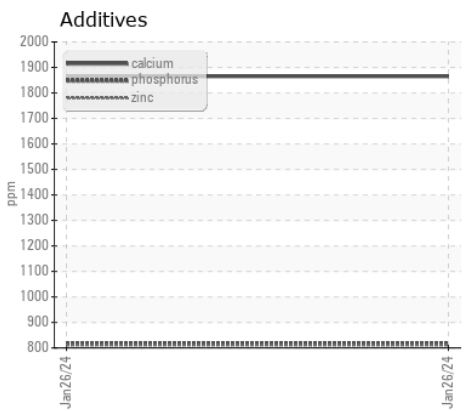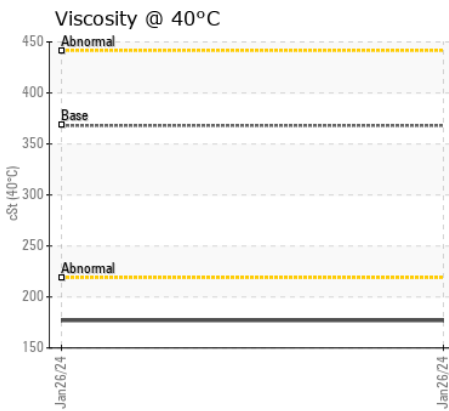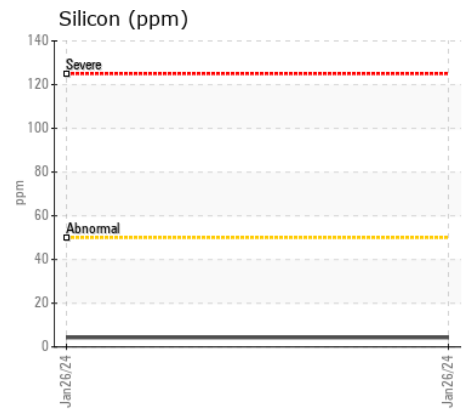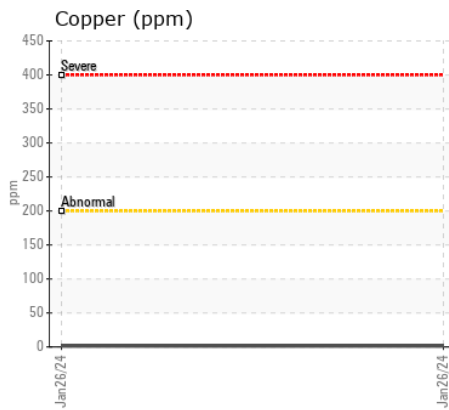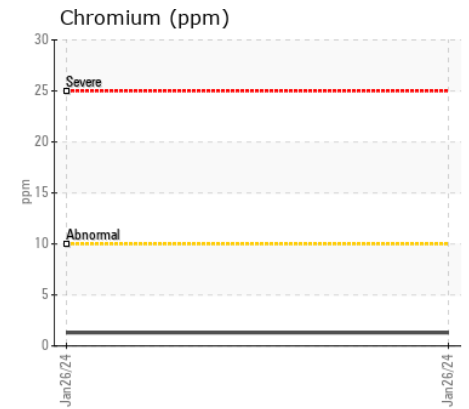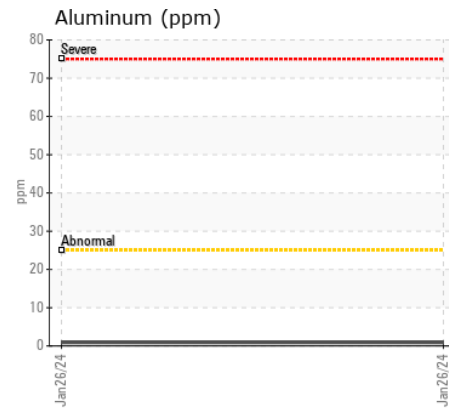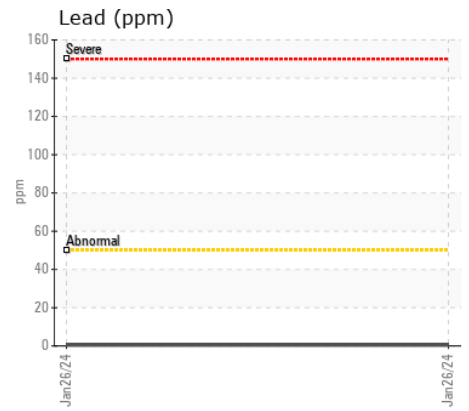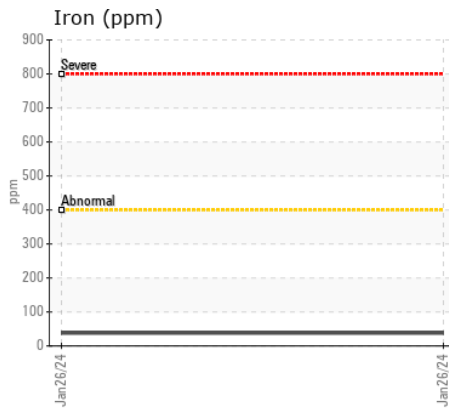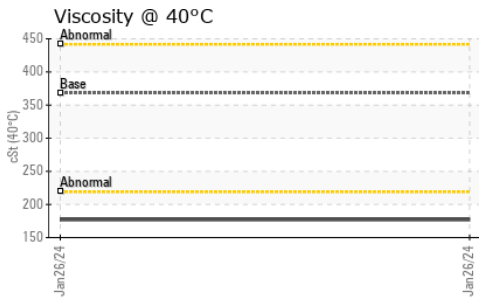

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP430560

Lab Number : 06085080

Unique Number : 10872525

Test Package : MOB 1

Received : 09 Feb 2024

Tested : 11 Feb 2024

Diagnosed : 12 Feb 2024 - Don Baldrige

COWIN EQUIPMENT COMPANY

P.O. DRAWER 9367

MONTGOMERY, AL

US 36108

Contact: BRYAN DICKS

bdicks@cowin.com

T: (334)262-6642

F: (334)269-1514

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)