



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**L-9 62 REDUCTION**

Component  
**Gearbox**

Fluid  
**PETRO CANADA ENDURATEX EP 150 (20 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0116732	PCA0091820	PCA0091869
Sample Date		Client Info		29 Jan 2024	27 Oct 2023	28 Apr 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

**WEAR**

All component wear rates are normal.

PQ		ASTM D8184		52	30	35
Iron	ppm	ASTM D5185m	>200	135	102	63
Chromium	ppm	ASTM D5185m	>15	2	1	1
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	<1	0	<1
Tin	ppm	ASTM D5185m	>25	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

**CONTAMINATION**









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	4	4	3
Potassium	ppm	ASTM D5185m	>20	0	1	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	0	0
Boron	ppm	ASTM D5185m	55	33	36	31
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m	0	2	<1	<1
Magnesium	ppm	ASTM D5185m	2	0	0	0
Calcium	ppm	ASTM D5185m	6	0	0	0
Phosphorus	ppm	ASTM D5185m	250	391	412	414
Zinc	ppm	ASTM D5185m	3	1	5	2
Sulfur	ppm	ASTM D5185m	7500	5801	5480	6435
Acid Number (AN)	mg KOH/g	ASTM D8045	0.5	1.08	1.02	1.12
Visc @ 40°C	cSt	ASTM D445	150.0	155	154	149

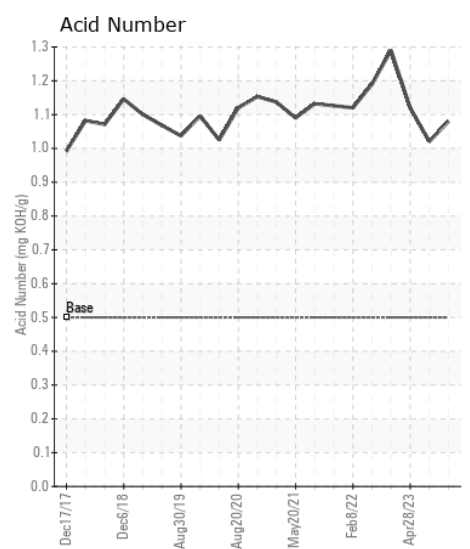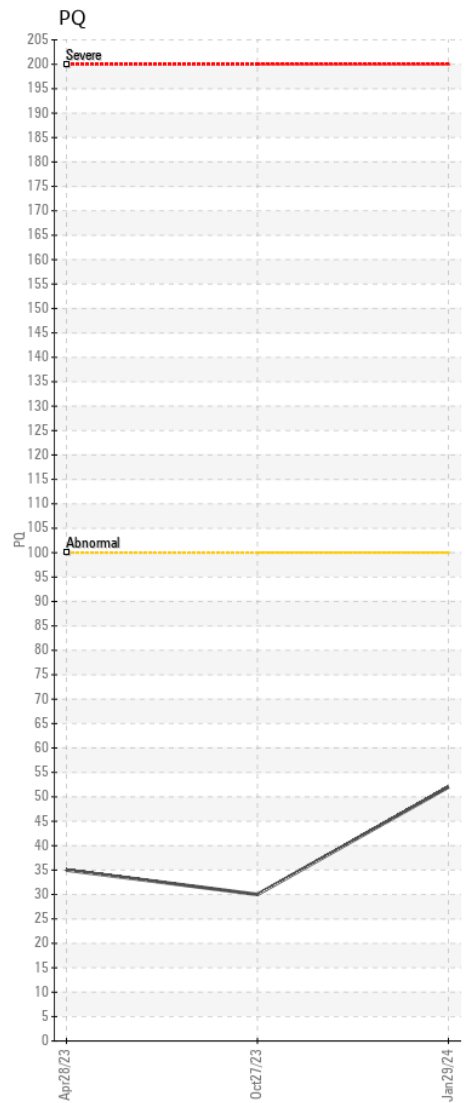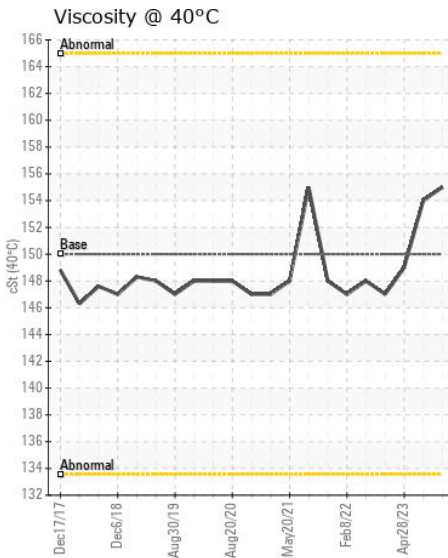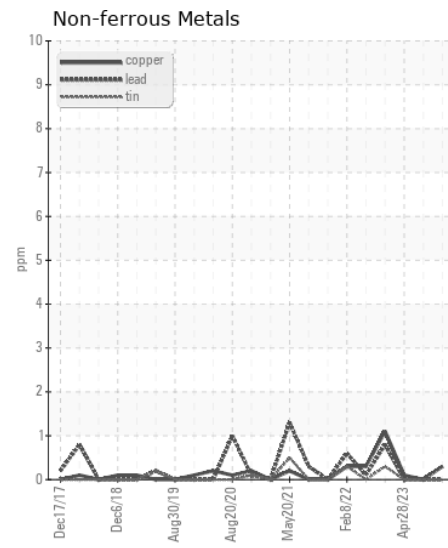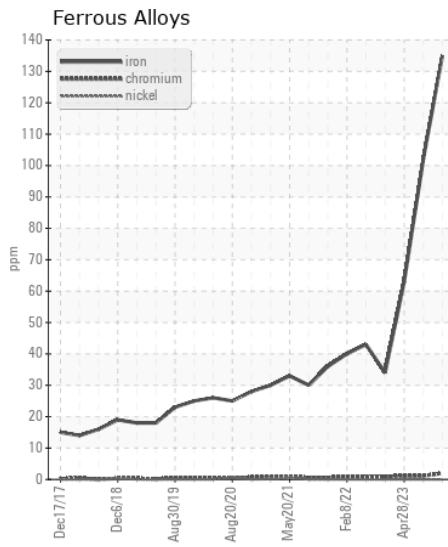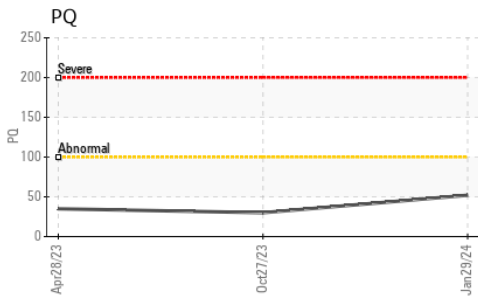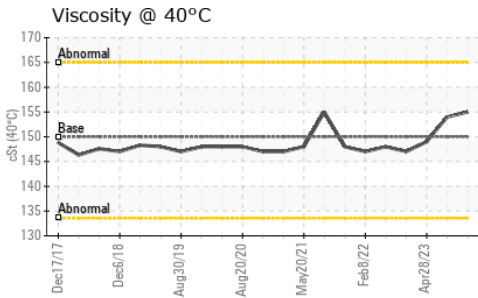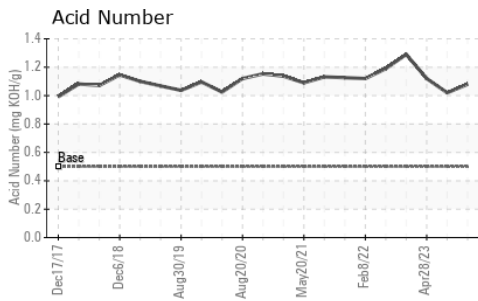

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : PCA0116732

Lab Number : 06085435

Unique Number : 10872880

Test Package : PLANT

Received : 09 Feb 2024

Tested : 12 Feb 2024

Diagnosed : 12 Feb 2024 - Wes Davis

**CERTAINTED VINYL PLANT**

2651 PENNY RD

CLAREMONT, NC

US 28613

Contact: BRUCE JAMES

bruce.a.james@saint-gobain.com

T: (828)459-3320

F: (828)459-3329

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)