



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W20956-QUINN]
 Machine Id
JOHN DEERE 3025E 1LV3025EEHH103206
 Component
Transmission (Manual)
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0204439	---	---
Sample Date		Client Info		02 Jan 2024	---	---
Machine Age	hrs	Client Info		44	---	---
Oil Age	hrs	Client Info		44	---	---
Filter Age	hrs	Client Info		44	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	18	---	---
Iron	ppm	ASTM D5185m	>200	77	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>7	<1	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>45	3	---	---
Copper	ppm	ASTM D5185m	>225	53	---	---
Tin	ppm	ASTM D5185m	>10	7	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	12	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m	6	1	---	---
Barium	ppm	ASTM D5185m	0	<1	---	---
Molybdenum	ppm	ASTM D5185m	0	0	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	145	91	---	---
Calcium	ppm	ASTM D5185m	3570	3234	---	---
Phosphorus	ppm	ASTM D5185m	1290	870	---	---
Zinc	ppm	ASTM D5185m	1640	1196	---	---
Sulfur	ppm	ASTM D5185m		3576	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	36.5	---	---

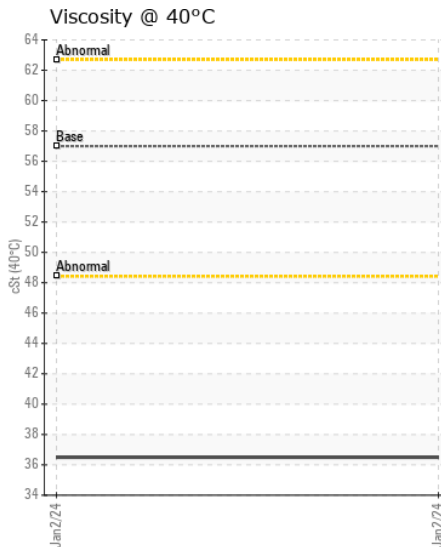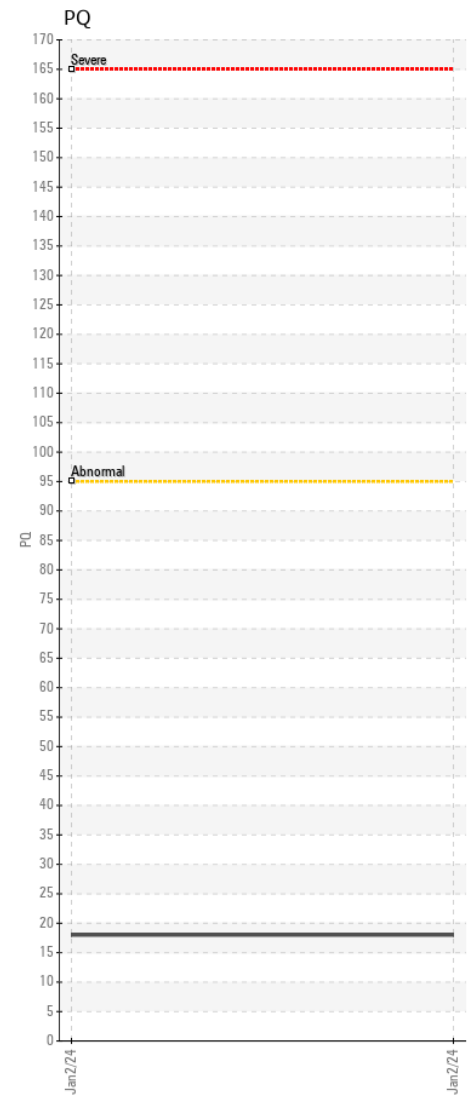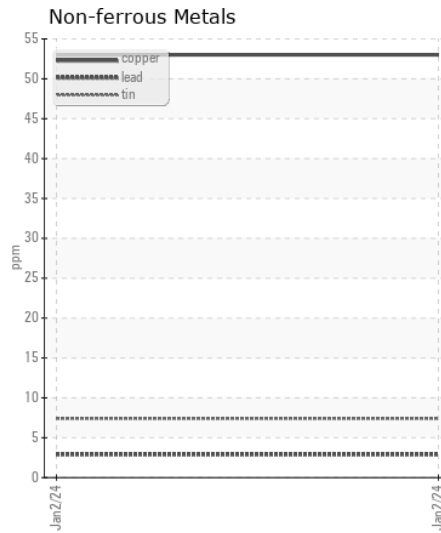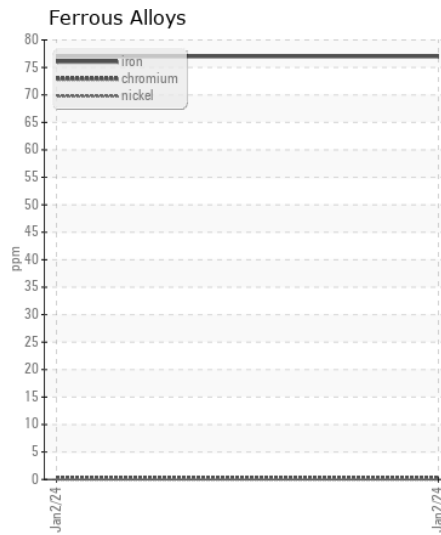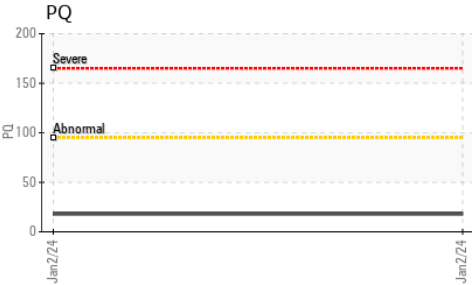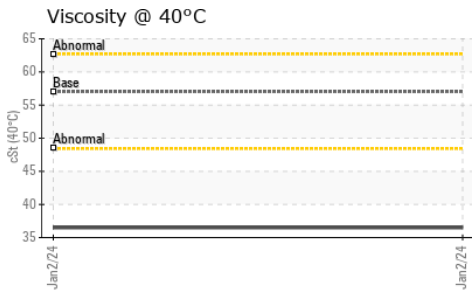

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0204439 **Received** : 09 Feb 2024
Lab Number : 06085472 **Tested** : 12 Feb 2024
Unique Number : 10872917 **Diagnosed** : 13 Feb 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PQ)

JRE - BURKEVILLE
 510 WEST COLONIAL DR
 BURKEVILLE, VA
 US 23922

Contact: RACHEL HARRIS
 RACHEL.HARRIS@JAMESRIVEREQUIPMENT.COM

T: (434)767-5578
 F: (434)767-3774

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)