



Area
[W20998-FASTRAC]
 Machine Id
JOHN DEERE 245G 1FF245GXLNF802923
 Component
Rear Right Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0204485	---	---
Sample Date		Client Info		05 Feb 2024	---	---
Machine Age	hrs	Client Info		427	---	---
Oil Age	hrs	Client Info		427	---	---
Filter Age	hrs	Client Info		427	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	251	---	---
Iron	ppm	ASTM D5185m	>750	299	---	---
Chromium	ppm	ASTM D5185m	>9	5	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		3	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	▲ 20	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>40	<1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>75	▲ 82	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	---	---
Boron	ppm	ASTM D5185m		60	---	---
Barium	ppm	ASTM D5185m		5	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		6	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m		15	---	---
Phosphorus	ppm	ASTM D5185m		434	---	---
Zinc	ppm	ASTM D5185m		18	---	---
Sulfur	ppm	ASTM D5185m		15527	---	---
Visc @ 40°C	cSt	ASTM D445		187	---	---

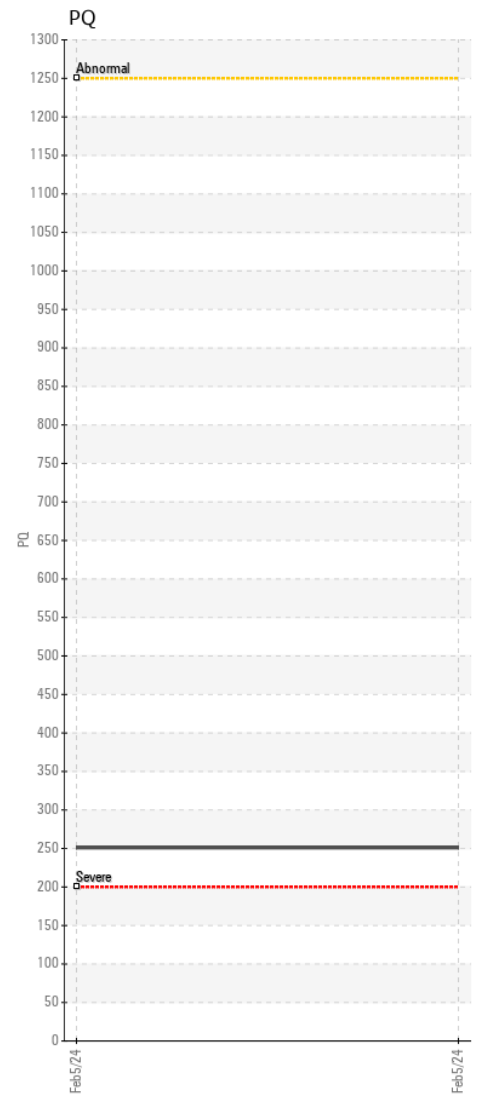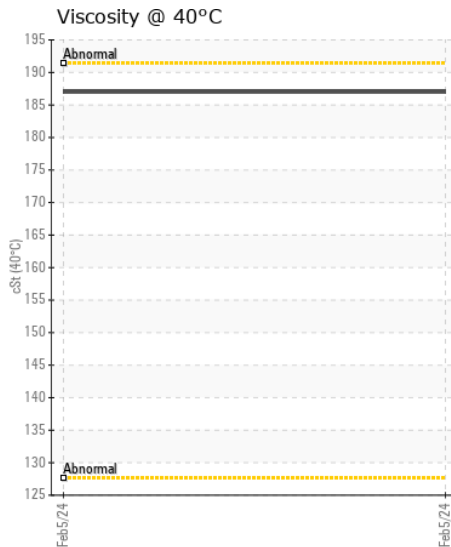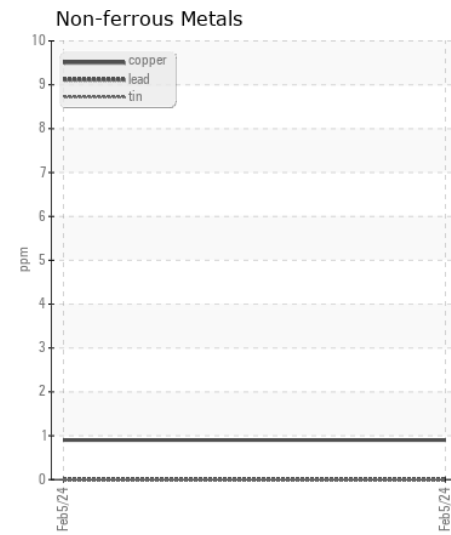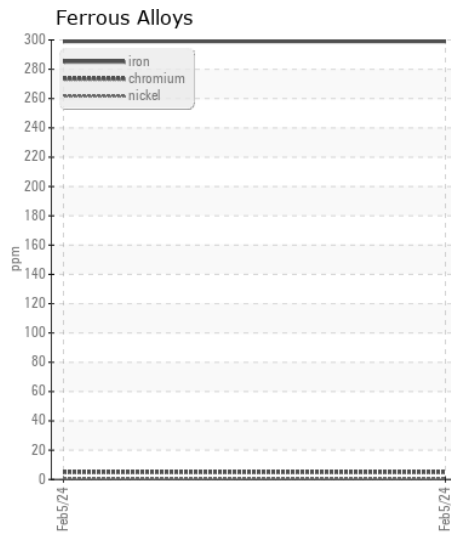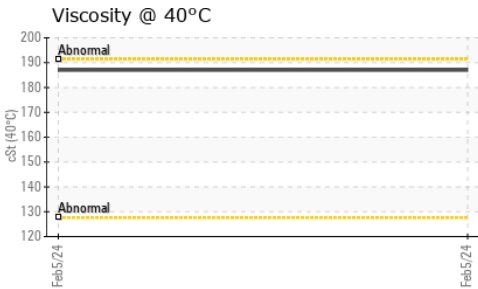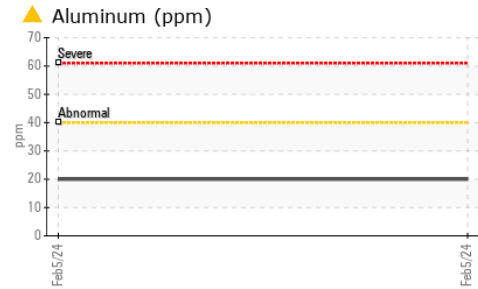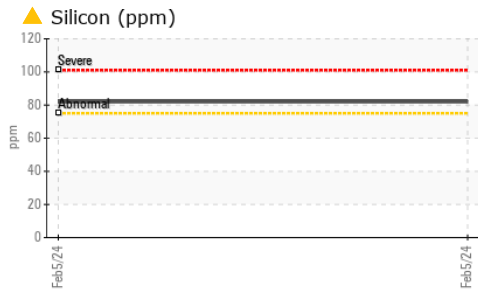

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0204485 **Received** : 09 Feb 2024
Lab Number : 06085486 **Tested** : 12 Feb 2024
Unique Number : 10872931 **Diagnosed** : 13 Feb 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PQ)

JRE - BURKEVILLE
 510 WEST COLONIAL DR
 BURKEVILLE, VA
 US 23922

Contact: BRANDON BOLLING
 bbolling@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (434)767-5578
 F: (434)767-3774