



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**4663M**  
Component  
**Transmission**  
Fluid  
**{not provided} (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0110153</b>	---	---
Sample Date		Client Info		<b>07 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>14644</b>	---	---
Oil Age	hrs	Client Info		<b>600</b>	---	---
Filter Age	hrs	Client Info		<b>600</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>95</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>50	<b>45</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>43</b>	---	---
Copper	ppm	ASTM D5185m	>200	<b>39</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>6</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**









There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	<b>11</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>12</b>	---	---
Boron	ppm	ASTM D5185m		<b>42</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>6</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>105</b>	---	---
Calcium	ppm	ASTM D5185m		<b>223</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>281</b>	---	---
Zinc	ppm	ASTM D5185m		<b>143</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>1581</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>34.34</b>	---	---

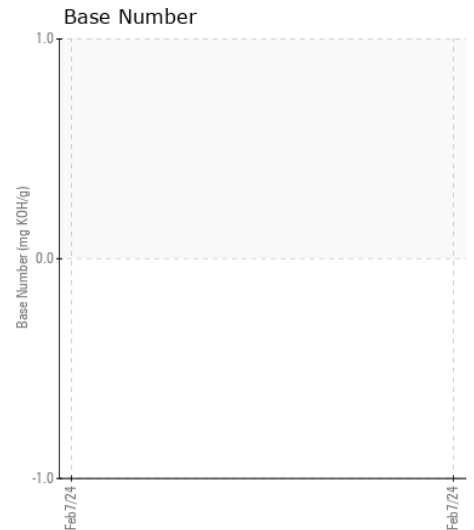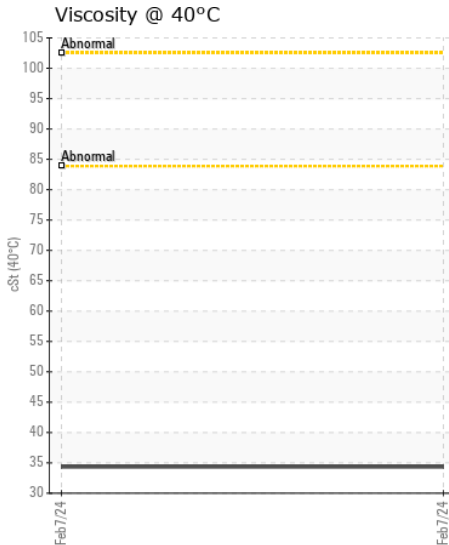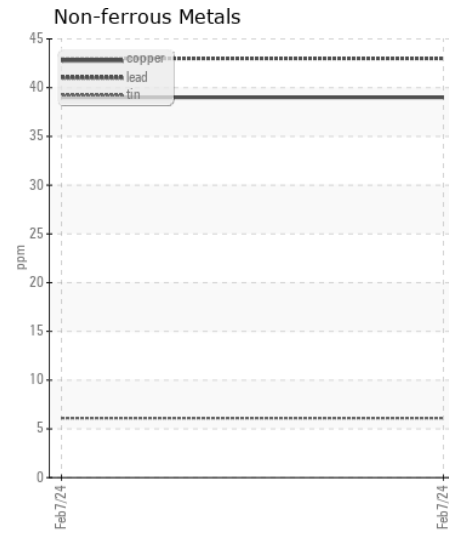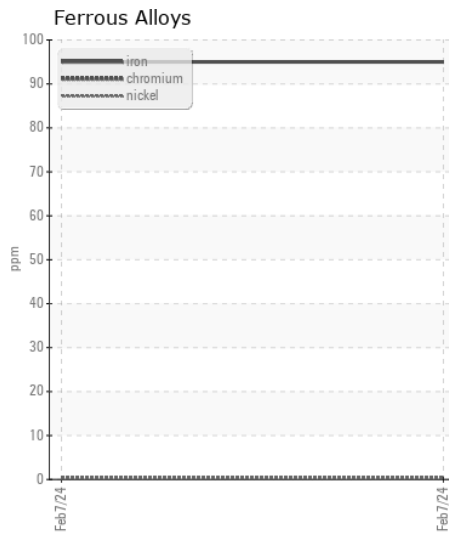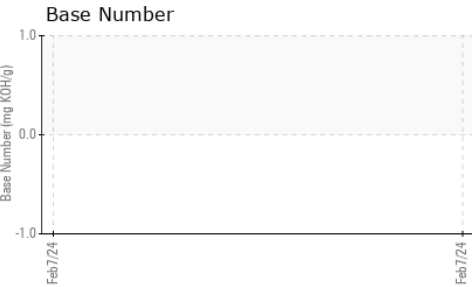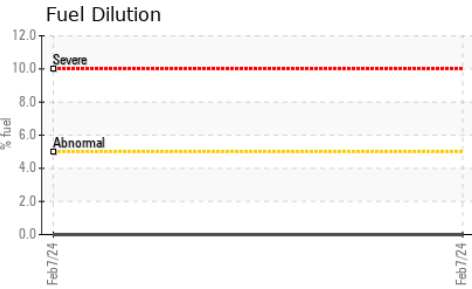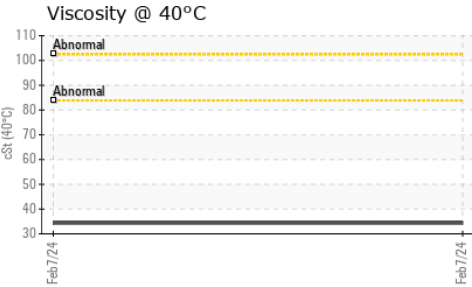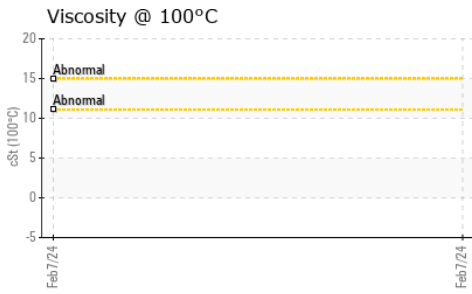

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110153  
**Lab Number** : 06085832  
**Unique Number** : 10873277  
**Test Package** : FLEET ( Additional Tests: FT-IR, FuelDilution, KV100, PercentFuel, TBN, VI )

**Received** : 12 Feb 2024  
**Tested** : 15 Feb 2024  
**Diagnosed** : 15 Feb 2024 - Jonathan Hester

**GFL Environmental - 410 - Michigan West**  
 39000 Van Born Rd  
 Wayne, MI  
 US 48184

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Belal Dgheish  
 bdgheish@gflenv.com

T: (734)714-2340

F: