



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 5 - Cross Lanes [RO#147032]
 Machine Id
JOHN DEERE 130G 1FF130GXCNF043269
 Component
Hydraulic System
 Fluid
HITACHI HYDRAULIC SUPER EX 46HN (49 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample
 Comment: Prev sample bad/change oil /filter/sampled new oil)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0046864	LEC0046793	LEC0036292
Sample Date		Client Info		08 Feb 2024	03 Jan 2024	15 Nov 2022
Machine Age	hrs	Client Info		693	550	14
Oil Age	hrs	Client Info		1	550	14
Filter Age	hrs	Client Info		1	550	14
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	14	12	10
Iron	ppm	ASTM D5185m	>32	<1	3	<1
Chromium	ppm	ASTM D5185m	>9	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>9	2	6	0
Lead	ppm	ASTM D5185m	>28	<1	<1	0
Copper	ppm	ASTM D5185m	>50	1	3	1
Tin	ppm	ASTM D5185m	>5	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	5	4	<1
Potassium	ppm	ASTM D5185m	>20	<1	5	0
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	2548	20111	14094
Particles >6µm		ASTM D7647	>20000	638	1319	355
Particles >14µm		ASTM D7647	>640	68	39	16
Particles >21µm		ASTM D7647	>160	17	10	4
Particles >38µm		ASTM D7647	>40	1	1	1
Particles >71µm		ASTM D7647	>10	0	0	1
Oil Cleanliness		ISO 4406 (c)	>23/21/16	19/16/13	22/18/12	21/16/11
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	0	10	0
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		13	8	0
Molybdenum	ppm	ASTM D5185m		1	<1	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		<1	23	0
Calcium	ppm	ASTM D5185m		67	289	5
Phosphorus	ppm	ASTM D5185m	827	653	130	612
Zinc	ppm	ASTM D5185m	0	17	▲ 300	15
Sulfur	ppm	ASTM D5185m	13	0	412	79
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.072	0.36	0.09
Visc @ 40°C	cSt	ASTM D445	47	48.8	43.2	47.4

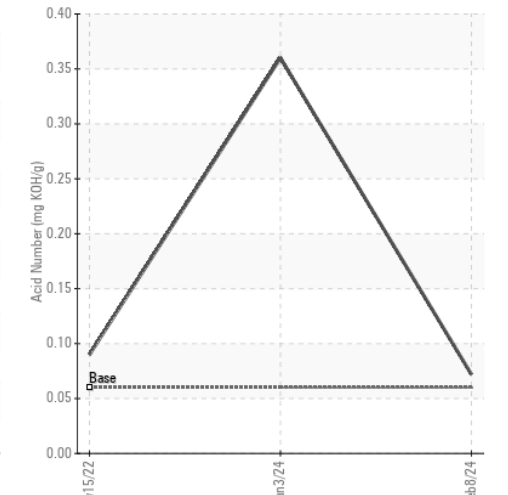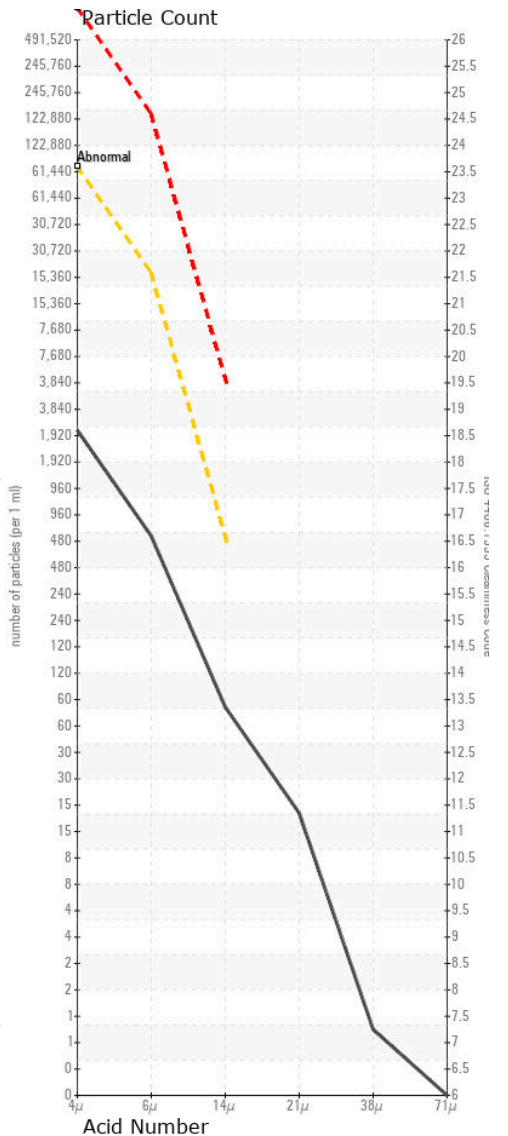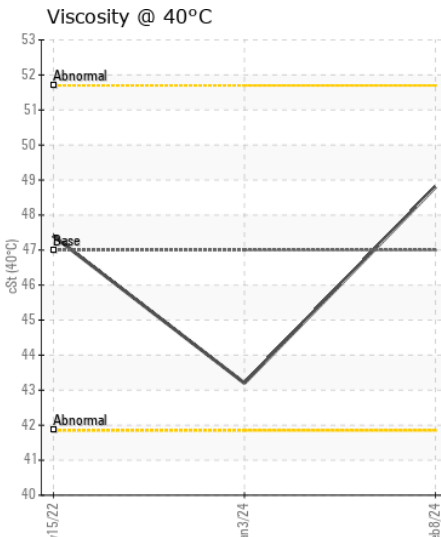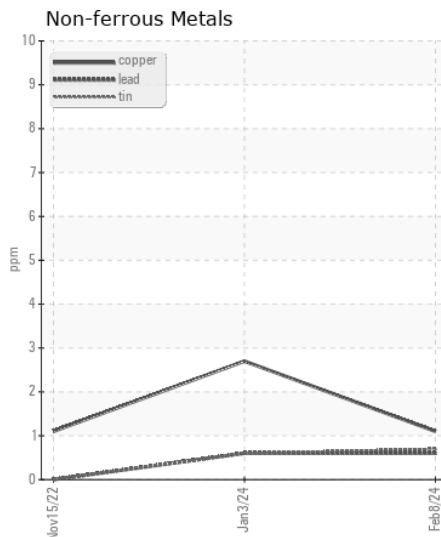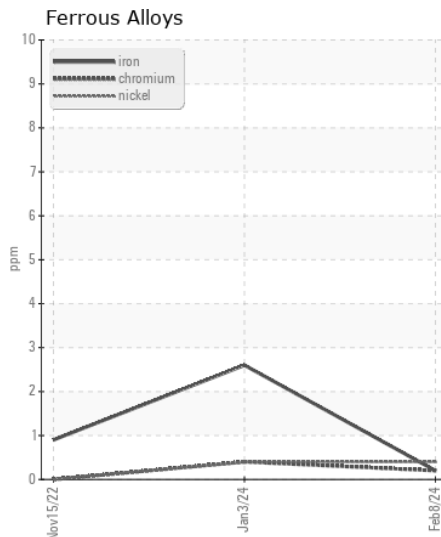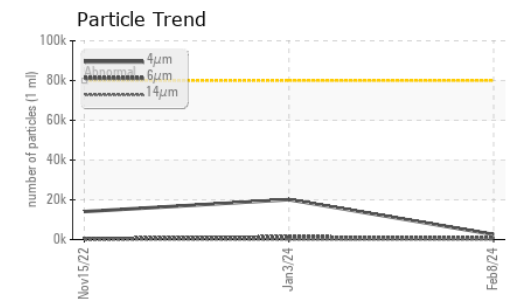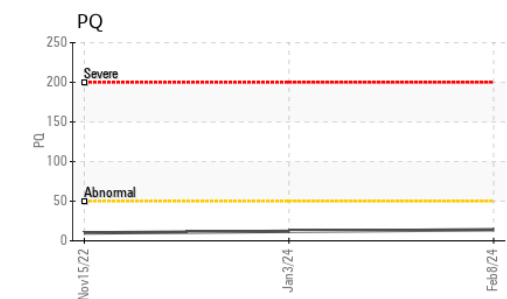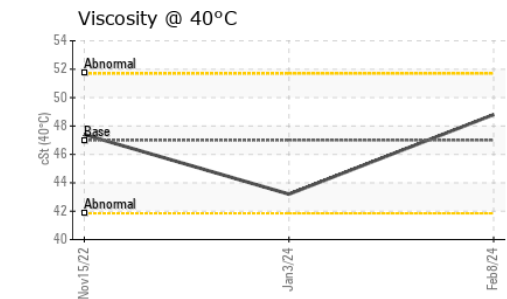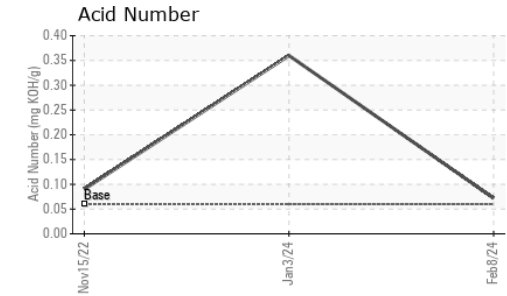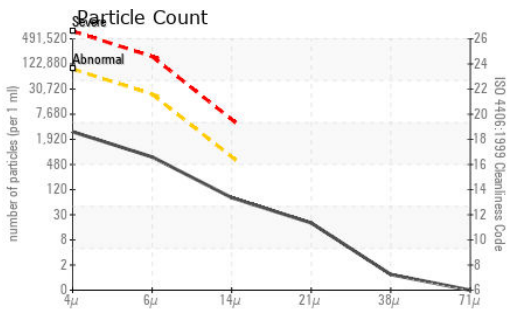

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0046864 **Received** : 12 Feb 2024
Lab Number : 06085985 **Tested** : 13 Feb 2024
Unique Number : 10873430 **Diagnosed** : 13 Feb 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570