



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 648L 1DW648LBCPL718497**

Component  
**Brake**

Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WE0006336</b>	---	---
Sample Date		Client Info		<b>08 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>452</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Not Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>75</b>	---	---
Iron	ppm	ASTM D5185m	>350	<b>145</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>8	<b>3</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>11</b>	---	---
Copper	ppm	ASTM D5185m	>150	<b>1</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>400	<b>184</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

## FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>5</b>	---	---
Boron	ppm	ASTM D5185m	6	<b>66</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>240</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m	145	<b>405</b>	---	---
Calcium	ppm	ASTM D5185m	3570	<b>1461</b>	---	---
Phosphorus	ppm	ASTM D5185m	1290	<b>674</b>	---	---
Zinc	ppm	ASTM D5185m	1640	<b>815</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>2280</b>	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>47.5</b>	---	---

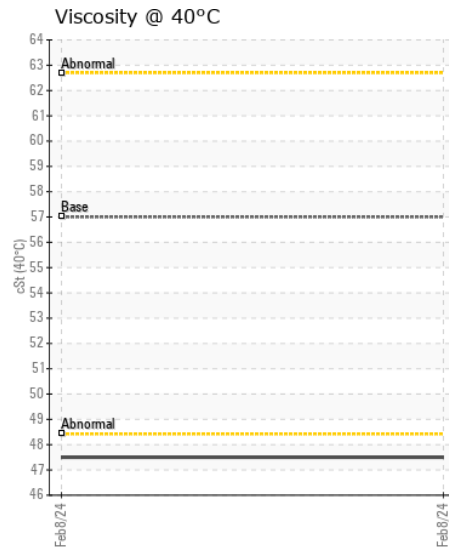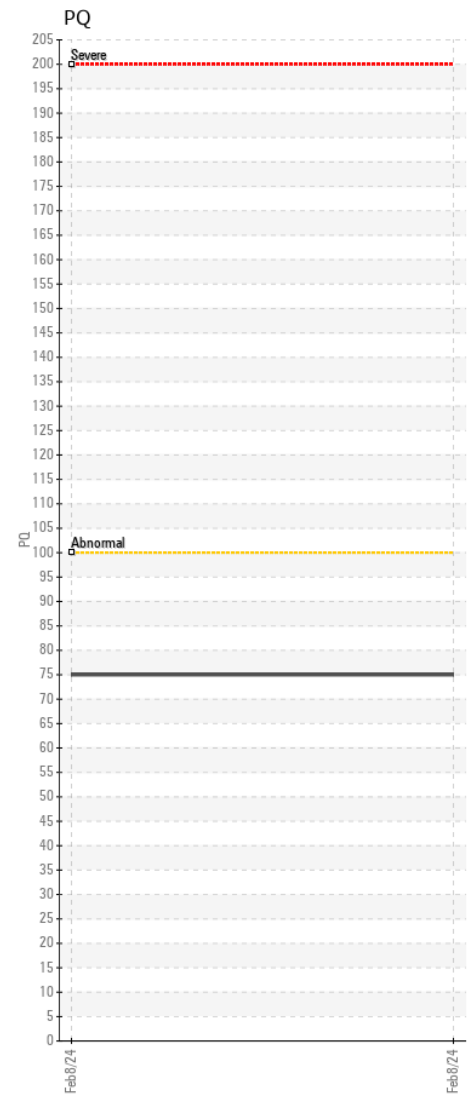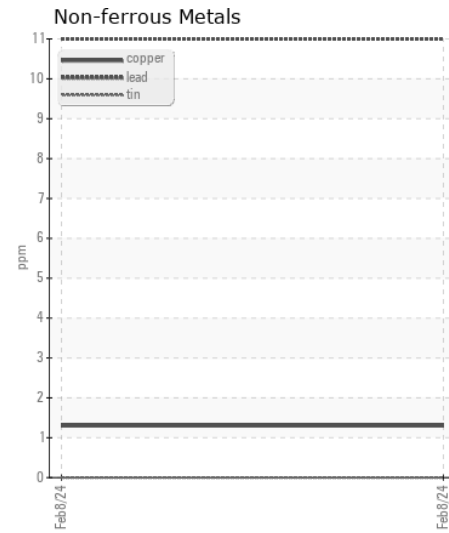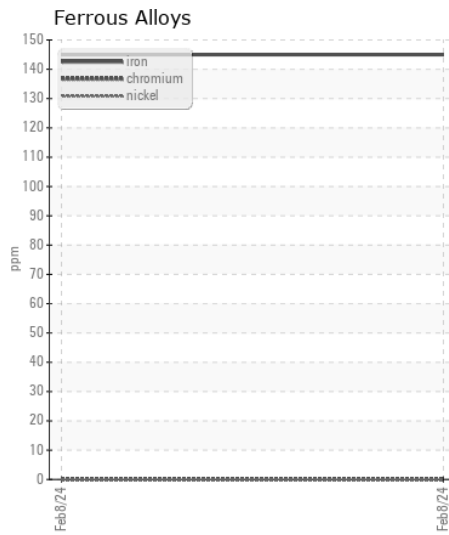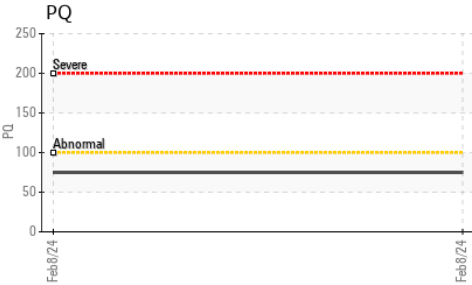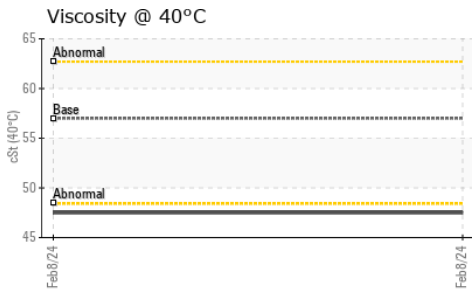

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WE0006336 **Received** : 12 Feb 2024  
**Lab Number** : 06086236 **Tested** : 13 Feb 2024  
**Unique Number** : 10873681 **Diagnosed** : 14 Feb 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: PQ )

**WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT**  
 P.O. BOX 412  
 NORTHPORT, AL  
 US 35476  
 Contact: CRAIG ANDOE  
 serve01@warriortractor.com  
 T: (205)339-0300  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)