



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[JUDY EXCAVATING]**  
 Machine Id  
**JOHN DEERE 350G PM061071 (S/N 1FF350GXHJF812999)**  
 Component  
**Swing Drive Gear Case**  
 Fluid  
**JOHN DEERE GL-5 80W90 (3 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0195630</b>	JR0169230	JR0151852
Sample Date		Client Info		<b>09 Feb 2024</b>	02 May 2023	16 Dec 2022
Machine Age	hrs	Client Info		<b>7946</b>	7013	6537
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>23</b>	27	17
Iron	ppm	ASTM D5185m	>200	<b>25</b>	24	17
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m		<b>0</b>	0	0
Lead	ppm	ASTM D5185m		<b>0</b>	0	0
Copper	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Tin	ppm	ASTM D5185m		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>2</b>	<1	2
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	<1
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	0	0
Boron	ppm	ASTM D5185m		<b>2</b>	17	19
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	1	1
Calcium	ppm	ASTM D5185m		<b>57</b>	4	7
Phosphorus	ppm	ASTM D5185m		<b>329</b>	369	384
Zinc	ppm	ASTM D5185m		<b>12</b>	3	3
Sulfur	ppm	ASTM D5185m		<b>19938</b>	19099	22546
Visc @ 40°C	cSt	ASTM D445		<b>139</b>	140	140

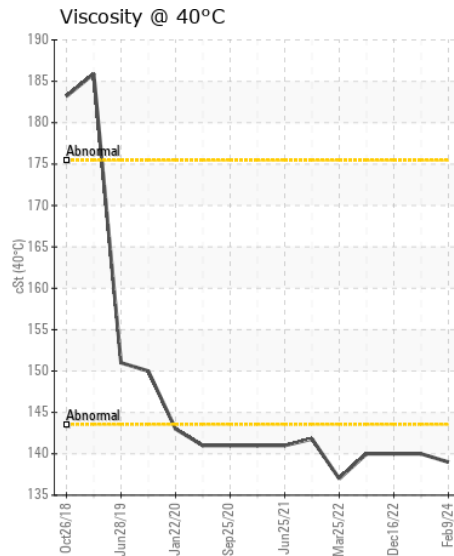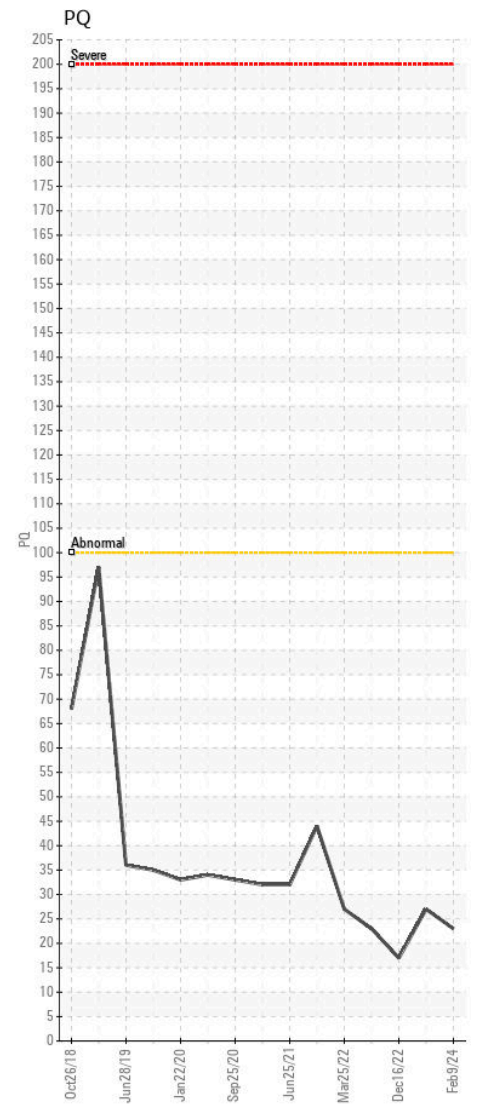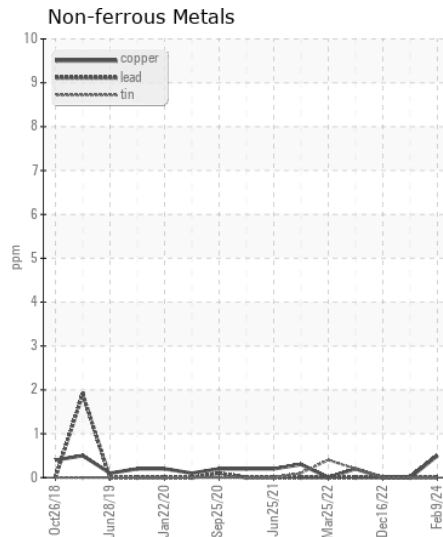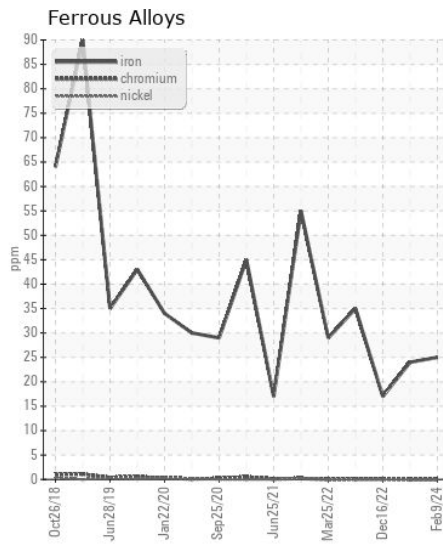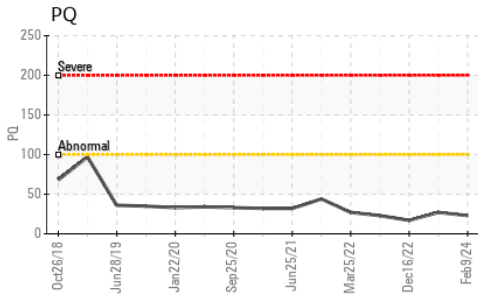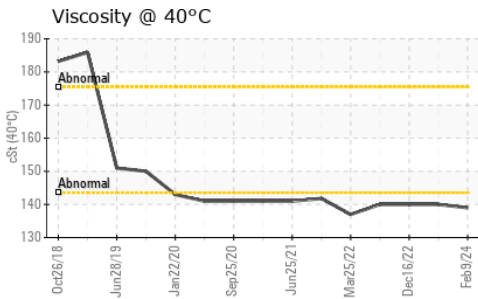

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0195630

**Lab Number** : 06086242

**Unique Number** : 10873687

**Test Package** : CONST ( Additional Tests: PQ )

**Received** : 12 Feb 2024

**Tested** : 13 Feb 2024

**Diagnosed** : 13 Feb 2024 - Sean Felton

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - STEPHENSON**

245 YARDMASTER COURT

STEPHENSON, VA

US 22656-1761

Contact: PHIL DAUGHERTY

pdaugherty@jamesriverequipment.com

T: x:

F: (540)693-2588