



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
AMR-Topeka
Machine Id
17593 LIEBHERR R934CHD 056656-1007
Component
Swing Drive
Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DJJ0018417	DJJ0019386	DJJ0018597
Sample Date		Client Info		06 Feb 2024	01 Aug 2023	28 Feb 2023
Machine Age	hrs	Client Info		15401	14921	14412
Oil Age	hrs	Client Info		0	1000	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ATTENTION	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>750	374	315	0
Chromium	ppm	ASTM D5185m	>10	2	2	0
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	<1	<1
Lead	ppm	ASTM D5185m	>5	<1	0	0
Copper	ppm	ASTM D5185m	>250	115	23	<1
Tin	ppm	ASTM D5185m	>10	7	1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>15	3	2	<1
Potassium	ppm	ASTM D5185m	>20	0	1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	MODER	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	▲ HAZY	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	▲ 0.2%	NEG

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	2	<1
Boron	ppm	ASTM D5185m	0	2	2	<1
Barium	ppm	ASTM D5185m	0	2	4	0
Molybdenum	ppm	ASTM D5185m	0	<1	0	0
Manganese	ppm	ASTM D5185m	0	3	3	<1
Magnesium	ppm	ASTM D5185m	<1	1	4	4
Calcium	ppm	ASTM D5185m	<1	171	46	0
Phosphorus	ppm	ASTM D5185m	2143	2295	2352	2069
Zinc	ppm	ASTM D5185m	<1	83	16	6
Sulfur	ppm	ASTM D5185m	23468	26445	34366	25056
Visc @ 40°C	cSt	ASTM D445	170	179	181	197


Viscosity @ 40°C

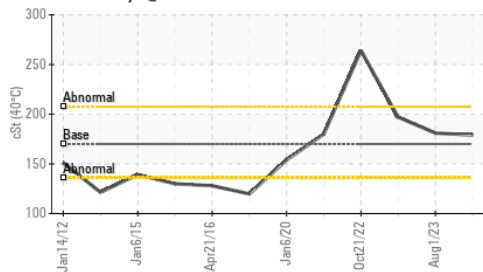


Ferrous Alloys

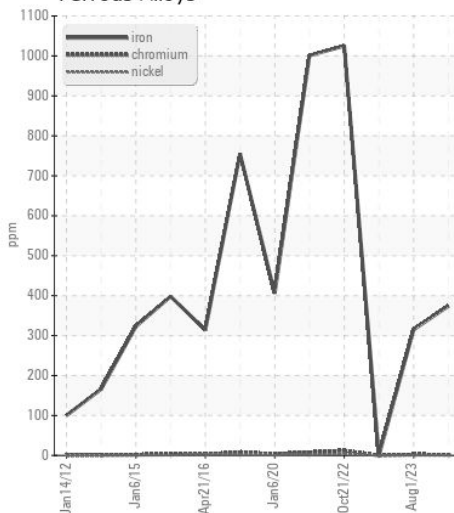

Non-ferrous Metals

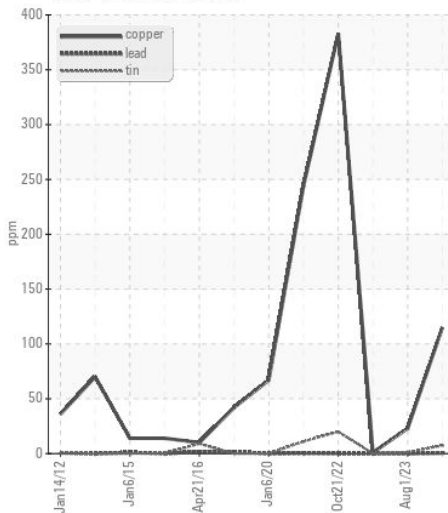

Viscosity @ 40°C

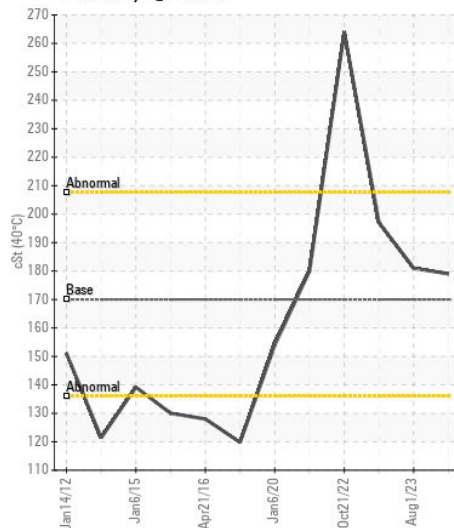

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DJJ0018417
Lab Number : 06087798
Unique Number : 10875243
Test Package : CONST

Received : 13 Feb 2024
Tested : 14 Feb 2024
Diagnosed : 15 Feb 2024 - Jonathan Hester

ADVANTAGE METALS RECYCLING - TOPEKA
 1628 NW GORDON ST
 TOPEKA, KS
 US 66608

Contact: SETH WATSON
 SETH.WATSON@ADVANTAGERECYCLING.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (913)621-2711
 F: (785)235-0002