



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A40G 342252
Component
Diesel Engine
Fluid
MOBIL 15W40 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP441994	VCP440659	VCP398094
Sample Date		Client Info		06 Feb 2024	29 Nov 2023	30 Oct 2023
Machine Age	hrs	Client Info		11740	11431	11266
Oil Age	hrs	Client Info		309	165	231
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	5	2	4
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	5	4	3
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>20	1	0	<1
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	10	4	4
Potassium	ppm	ASTM D5185m	>20	2	<1	1
Fuel	%	ASTM D3524	>3.0	0.3	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.4	7.8	8.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.1	17.6	18.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	2	3	3
Boron	ppm	ASTM D5185m		192	147	119
Barium	ppm	ASTM D5185m		13	0	0
Molybdenum	ppm	ASTM D5185m		189	127	110
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		1009	672	669
Calcium	ppm	ASTM D5185m		1902	1268	1329
Phosphorus	ppm	ASTM D5185m		1092	705	736
Zinc	ppm	ASTM D5185m		1325	878	894
Sulfur	ppm	ASTM D5185m		5448	3336	3701
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	14.3	14.9
Base Number (BN)	mg KOH/g	ASTM D2896		6.6	6.3	7.0
Visc @ 100°C	cSt	ASTM D445		12.4	12.9	12.86

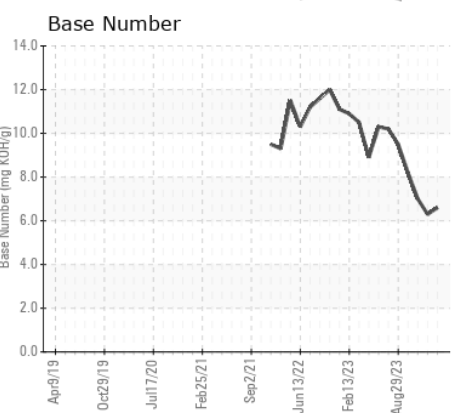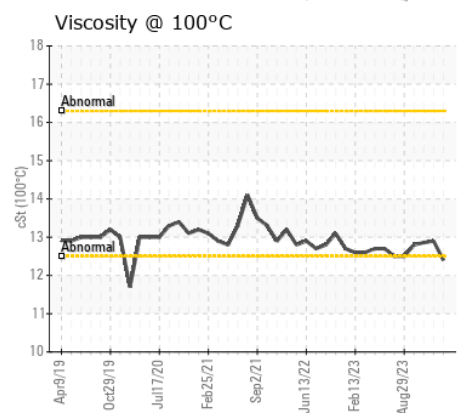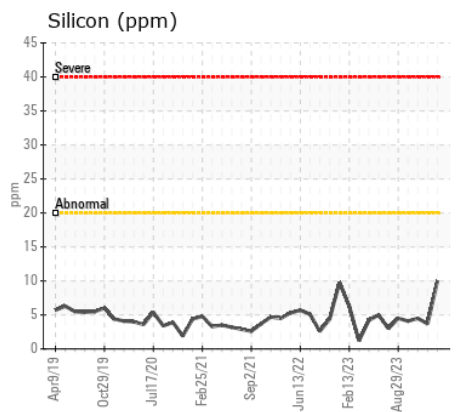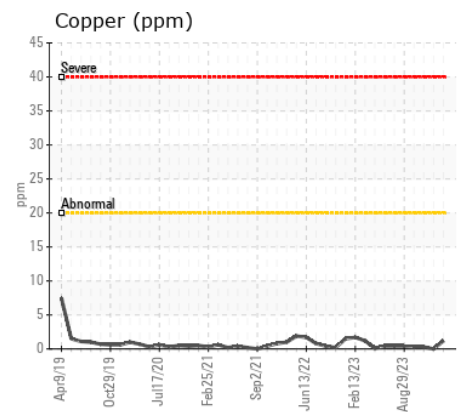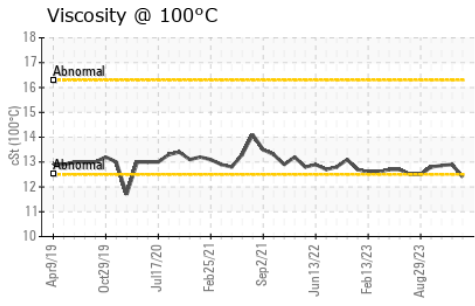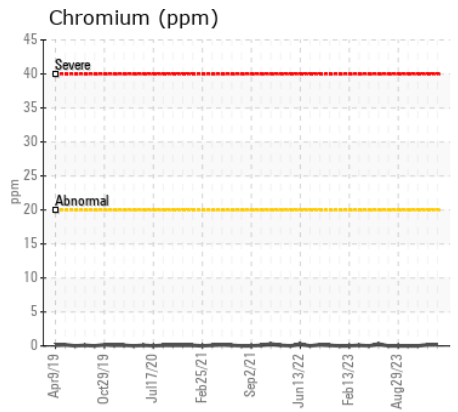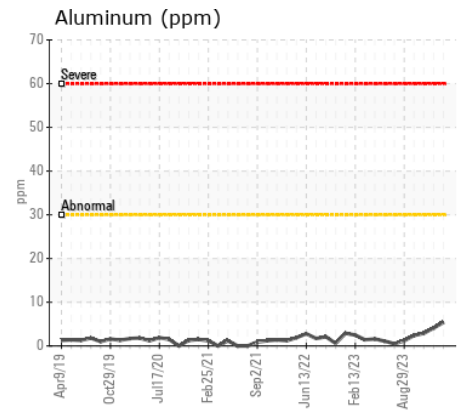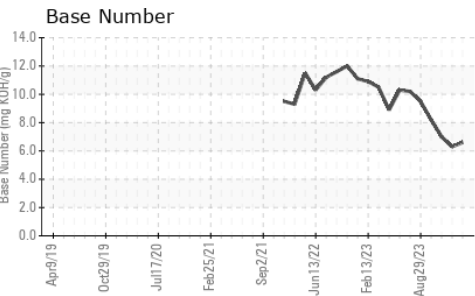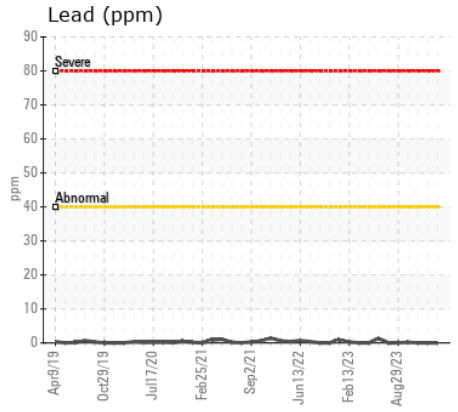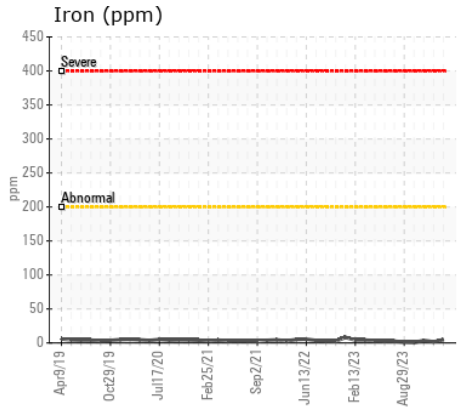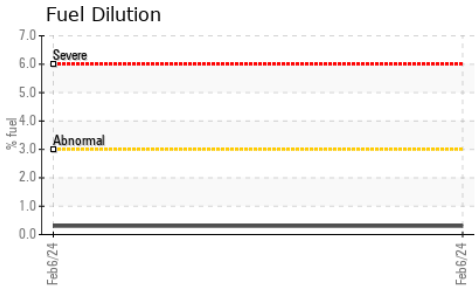

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP441994 **Received** : 14 Feb 2024
Lab Number : 06088594 **Tested** : 15 Feb 2024
Unique Number : 10876039 **Diagnosed** : 15 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

SCHILDBERG CONSTRUCTION COMPANY
 PO BOX 358
 GREENFIELD, IA
 US 50849
 Contact: SCOTT ARMSTRONG
 sarmstrong@schildberg.com
 T: (641)743-8237
 F: (641)743-2486

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)