



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[W64062]

Machine Id

JOHN DEERE 350G 1FF350GXVNF815449

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (8 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: W64062)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0203560	---	---
Sample Date		Client Info		13 Feb 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		3390	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

Valve wear is indicated.

Iron	ppm	ASTM D5185m	>100	29	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	▲ 5	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	4	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	6	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	9	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel	%	ASTM D3524	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.8	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		62	---	---
Barium	ppm	ASTM D5185m		12	---	---
Molybdenum	ppm	ASTM D5185m		88	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		113	---	---
Calcium	ppm	ASTM D5185m		2184	---	---
Phosphorus	ppm	ASTM D5185m		1087	---	---
Zinc	ppm	ASTM D5185m		1200	---	---
Sulfur	ppm	ASTM D5185m		4343	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.0	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	6.7	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	---	---


▲ Ferrous Alloys

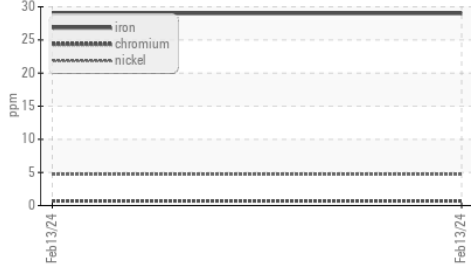


Base Number

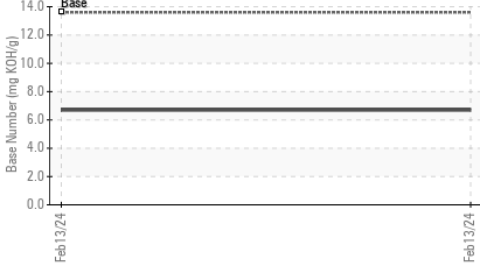

▲ Ferrous Alloys

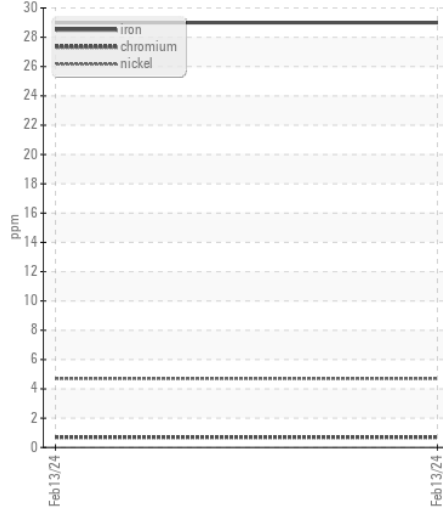


Non-ferrous Metals

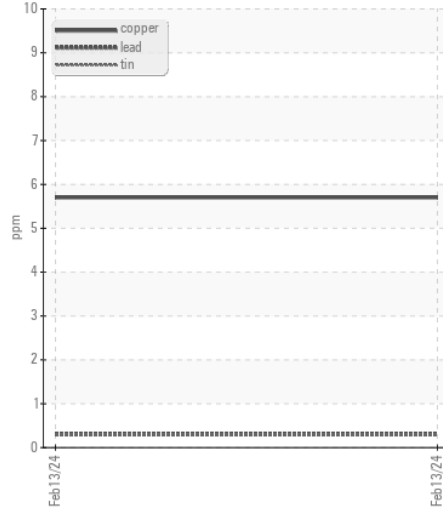


Viscosity @ 100°C




Viscosity @ 40°C

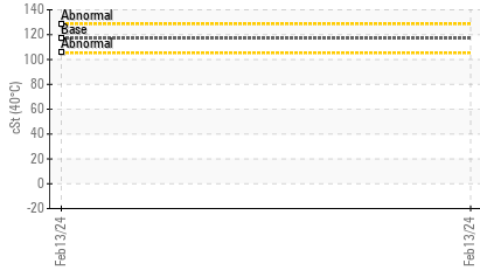

Viscosity @ 100°C

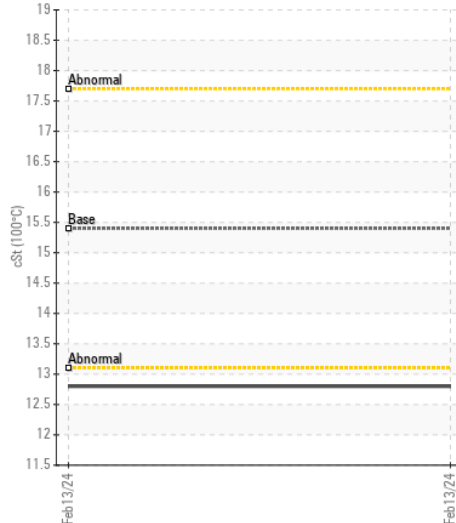

Base Number

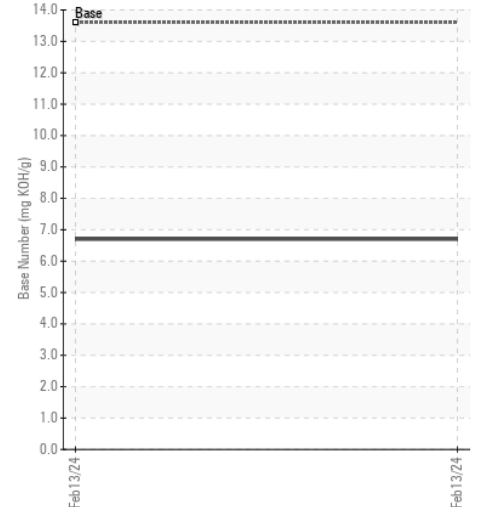

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0203560 **Received** : 14 Feb 2024
Lab Number : 06088655 **Tested** : 15 Feb 2024
Unique Number : 10876100 **Diagnosed** : 15 Feb 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, KV40, TBN)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269

Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211
 F: (704)596-6198