



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
PALEXTRA 44
Machine Id
1603100010 - CONVERTING TECH
Component
Compressor

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		UCS06088919	UCS05549219	---
Sample Date		Client Info		01 Feb 2024	17 May 2022	---
Machine Age	hrs	Client Info		54600	45817	---
Oil Age	hrs	Client Info		4826	4500	---
Filter Age	hrs	Client Info		2307	2500	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	11	0	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m		0	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	<1	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	<1	<1	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	1	---
Potassium	ppm	ASTM D5185m	>20	0	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	0	---
Boron	ppm	ASTM D5185m	0	0	<1	---
Barium	ppm	ASTM D5185m	0.3	8	0	---
Molybdenum	ppm	ASTM D5185m	0	<1	0	---
Manganese	ppm	ASTM D5185m	0.3	<1	0	---
Magnesium	ppm	ASTM D5185m	0.4	0	0	---
Calcium	ppm	ASTM D5185m	0	3	0	---
Phosphorus	ppm	ASTM D5185m	689	100	539	---
Zinc	ppm	ASTM D5185m	0	0	0	---
Sulfur	ppm	ASTM D5185m	1237	318	608	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.135	0.16	0.22	---
Visc @ 40°C	cSt	ASTM D445	44.62	44.5	44.0	---

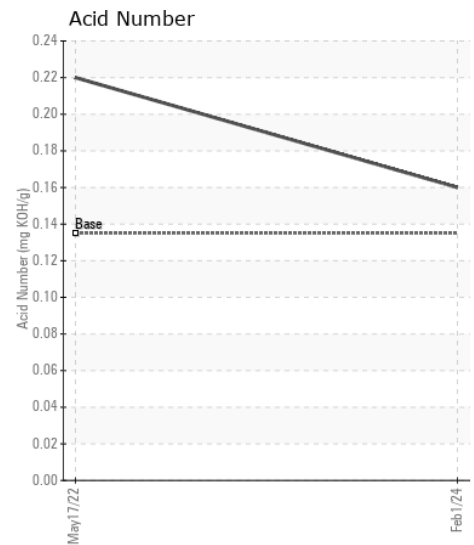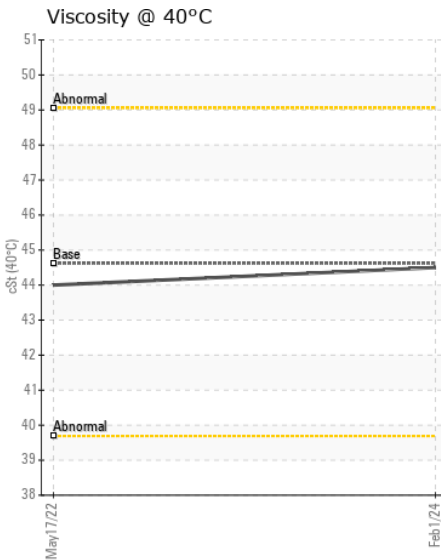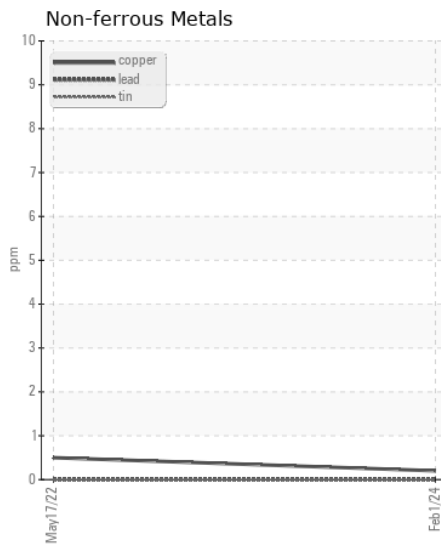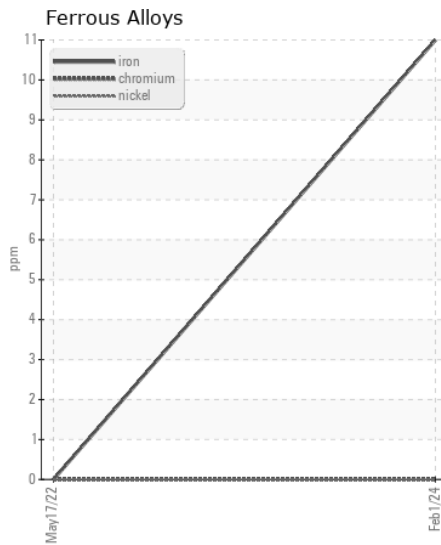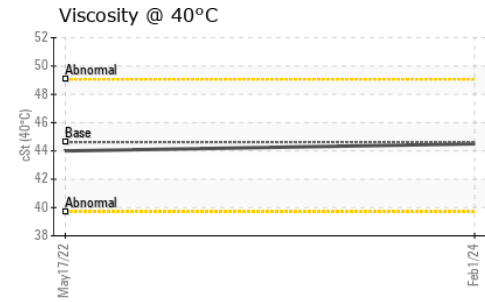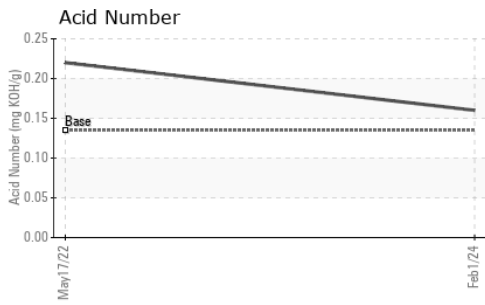

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : UCS06088919 **Received** : 14 Feb 2024
Lab Number : 06088919 **Tested** : 15 Feb 2024
Unique Number : 10876364 **Diagnosed** : 15 Feb 2024 - Don Baldrige
Test Package : IND 2

HARRIS EQUIPMENT
 2040 N HAWTHORNE
 MELROSE PARK, IL
 US 60160

Contact: J.P. PEDERSEN
 jpedersen@harrisequipment.com

T: (708)343-0866

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)