



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 350P 1FF350PAHNF000281**  
 Component  
**Right Final Drive**  
 Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0156958</b>	JR0191190	---
Sample Date		Client Info		<b>13 Feb 2024</b>	13 Nov 2023	---
Machine Age	hrs	Client Info		<b>1551</b>	1091	---
Oil Age	hrs	Client Info		<b>1551</b>	1091	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>49</b>	55	---
Iron	ppm	ASTM D5185m	>750	<b>258</b>	81	---
Chromium	ppm	ASTM D5185m	>9	<b>4</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>40	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>15	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>75	<b>10</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<b>0</b>	2	---
Boron	ppm	ASTM D5185m	400	<b>141</b>	103	---
Barium	ppm	ASTM D5185m	200	<b>12</b>	0	---
Molybdenum	ppm	ASTM D5185m	12	<b>&lt;1</b>	0	---
Manganese	ppm	ASTM D5185m		<b>3</b>	1	---
Magnesium	ppm	ASTM D5185m	12	<b>130</b>	96	---
Calcium	ppm	ASTM D5185m	150	<b>51</b>	14	---
Phosphorus	ppm	ASTM D5185m	1650	<b>1628</b>	1331	---
Zinc	ppm	ASTM D5185m	125	<b>4</b>	8	---
Sulfur	ppm	ASTM D5185m	22500	<b>27627</b>	21251	---
Visc @ 40°C	cSt	ASTM D445	143	<b>164</b>	165	---

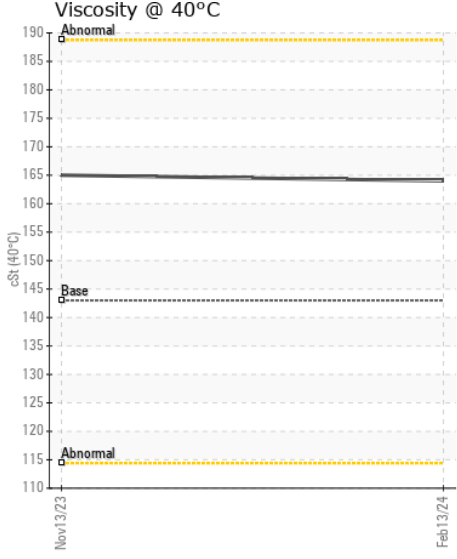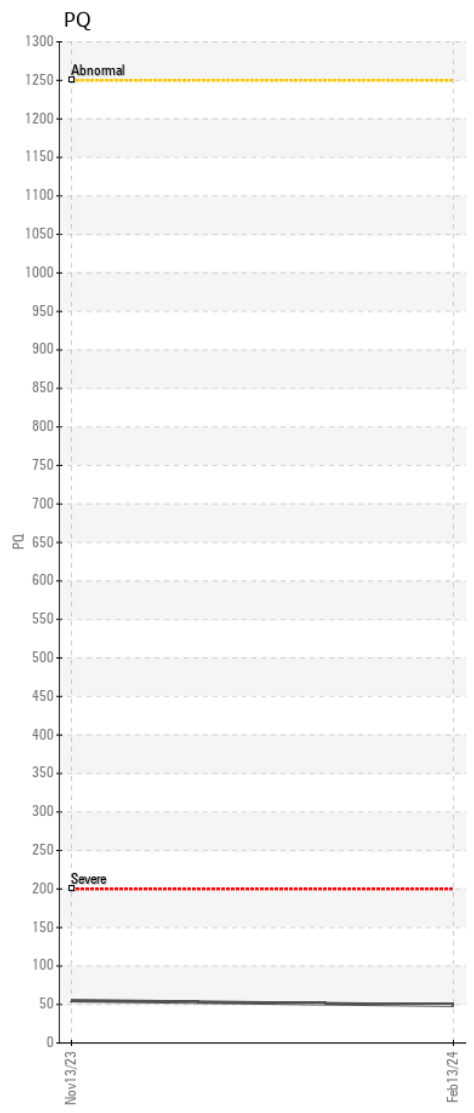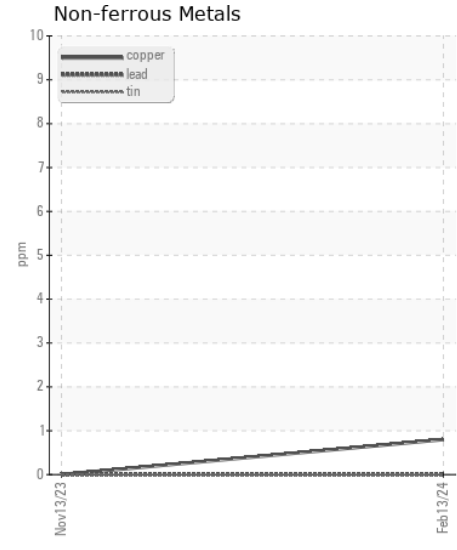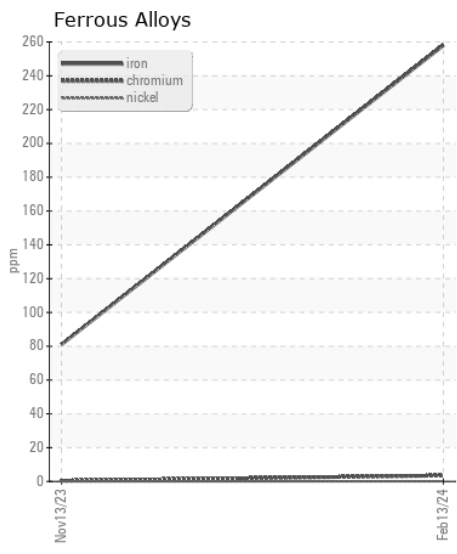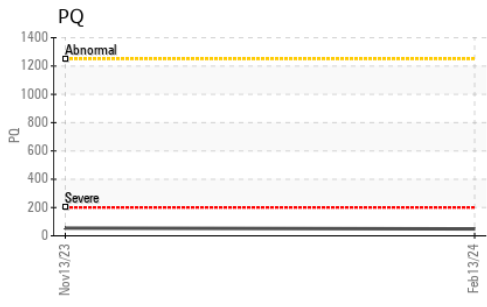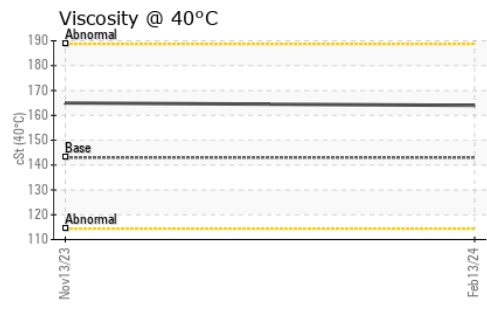

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0156958 **Received** : 14 Feb 2024  
**Lab Number** : 06089086 **Tested** : 15 Feb 2024  
**Unique Number** : 10876531 **Diagnosed** : 15 Feb 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - GARNER**  
 4161 AUBURN CHURCH RD  
 GARNER, NC  
 US 27529  
 Contact: RALEIGH SHOP

To discuss this sample report, contact Customer Service at 1-800-237-1369.

sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (919)614-2260

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (919)779-5432