



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 544 P 1DW544PAJPLX20402

Component
Front Axle

Fluid
TDH FLUID SAE 75W80 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TDH FLUID SAE 75W80. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0203440	---	---
Sample Date		Client Info		13 Feb 2024	---	---
Machine Age	hrs	Client Info		523	---	---
Oil Age	hrs	Client Info		523	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		16	---	---
Iron	ppm	ASTM D5185m	>750	39	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>21	2	---	---
Lead	ppm	ASTM D5185m	>49	23	---	---
Copper	ppm	ASTM D5185m	>101	62	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION






There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	6	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	0	---	---
Boron	ppm	ASTM D5185m	10	<1	---	---
Barium	ppm	ASTM D5185m	10	16	---	---
Molybdenum	ppm	ASTM D5185m	10	<1	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m	100	99	---	---
Calcium	ppm	ASTM D5185m	3500	3526	---	---
Phosphorus	ppm	ASTM D5185m	1150	1186	---	---
Zinc	ppm	ASTM D5185m	1150	1226	---	---
Sulfur	ppm	ASTM D5185m	5000	5402	---	---
Visc @ 40°C	cSt	ASTM D445	48	54.0	---	---

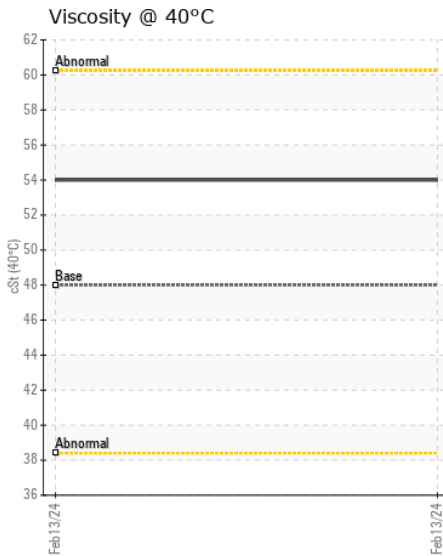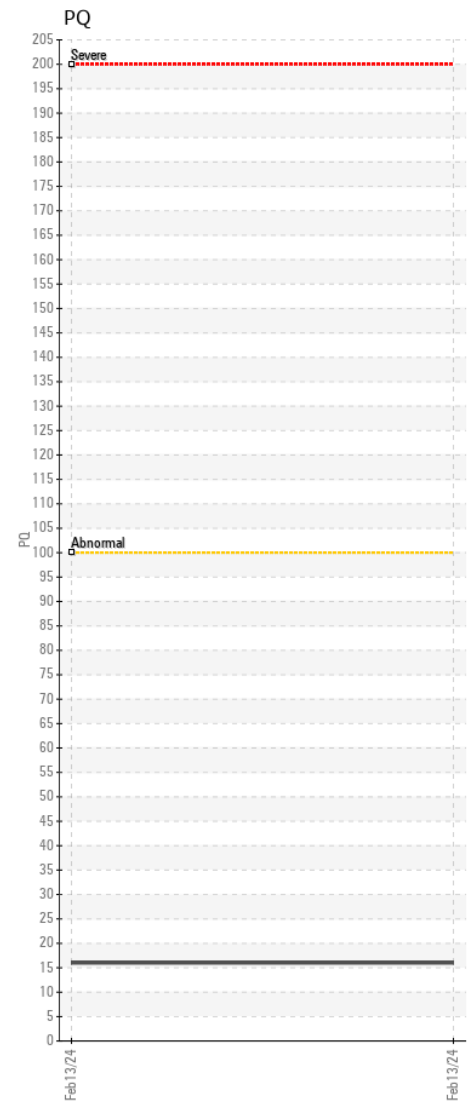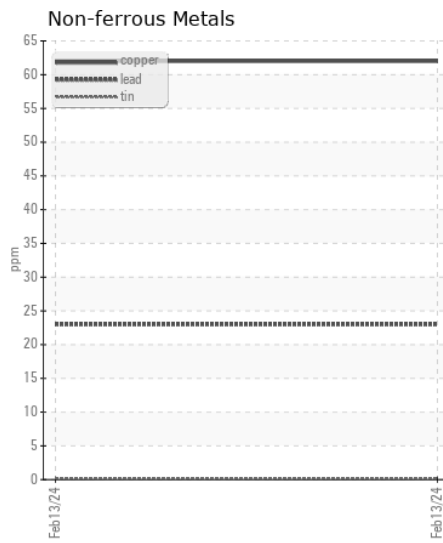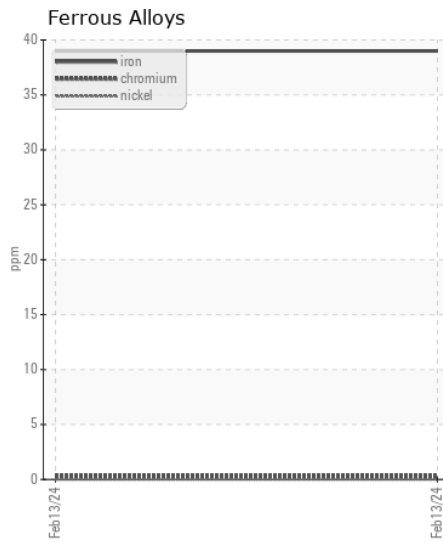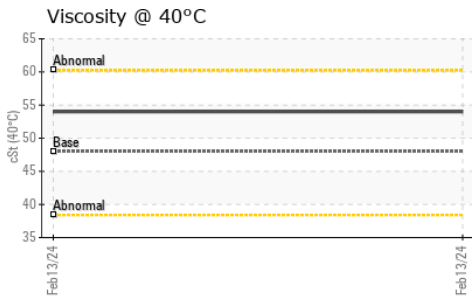

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0203440 **Received** : 14 Feb 2024
Lab Number : 06089099 **Tested** : 15 Feb 2024
Unique Number : 10876544 **Diagnosed** : 15 Feb 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

CARLTON'S BACKHOE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: LEO

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)547-0211

F: