



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 245G 1FF245GXCNF802665

Component
2 Pump Drive

Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0204096	---	---
Sample Date		Client Info		13 Feb 2024	---	---
Machine Age	hrs	Client Info		641	---	---
Oil Age	hrs	Client Info		641	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		17	---	---
Iron	ppm	ASTM D5185m	>151	78	---	---
Chromium	ppm	ASTM D5185m	>11	1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>21	2	---	---
Lead	ppm	ASTM D5185m	>51	0	---	---
Copper	ppm	ASTM D5185m	>51	2	---	---
Tin	ppm	ASTM D5185m	>4	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION






There is no indication of any contamination in the fluid.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	11	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	0	---	---
Boron	ppm	ASTM D5185m		62	---	---
Barium	ppm	ASTM D5185m		23	---	---
Molybdenum	ppm	ASTM D5185m		109	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		17	---	---
Calcium	ppm	ASTM D5185m		4152	---	---
Phosphorus	ppm	ASTM D5185m		1344	---	---
Zinc	ppm	ASTM D5185m		1344	---	---
Sulfur	ppm	ASTM D5185m		11257	---	---
Visc @ 40°C	cSt	ASTM D445		64.2	---	---

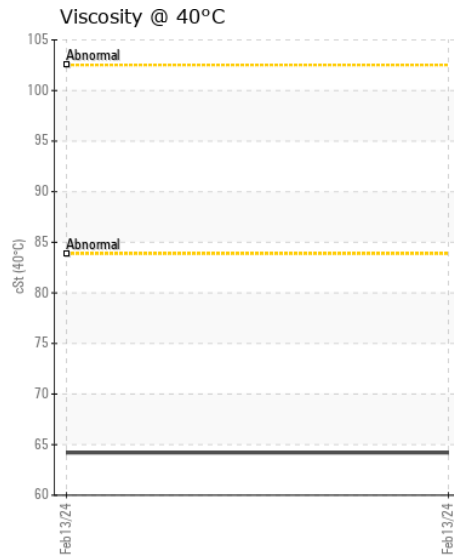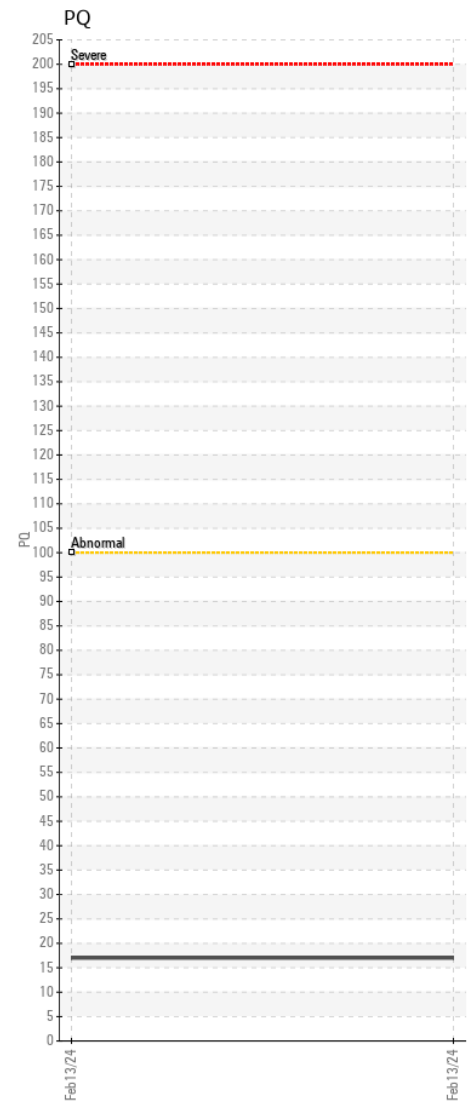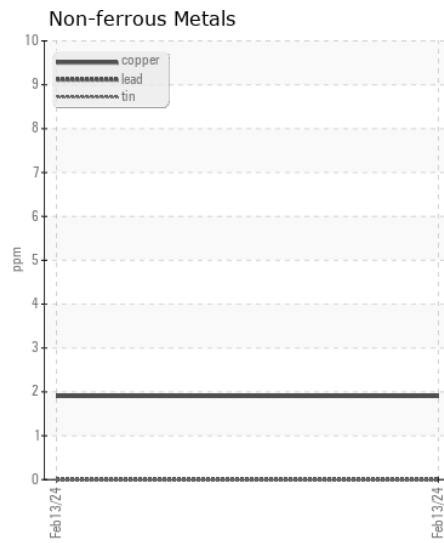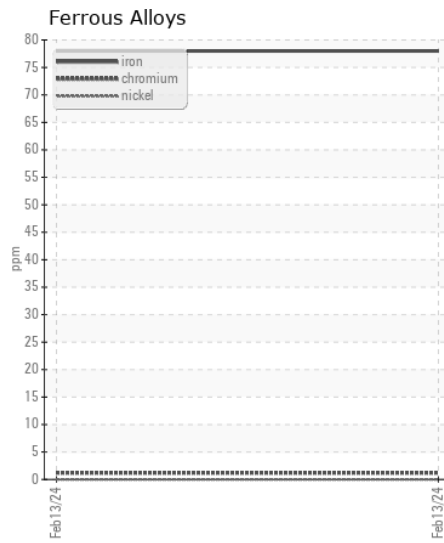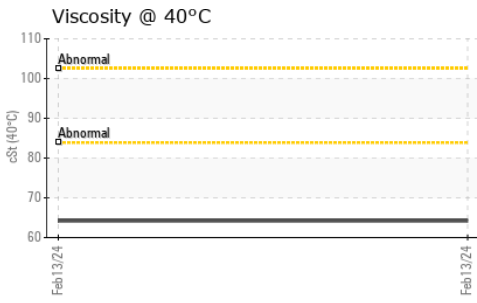

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0204096 **Received** : 14 Feb 2024
Lab Number : 06089101 **Tested** : 15 Feb 2024
Unique Number : 10876546 **Diagnosed** : 15 Feb 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409

Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM

T: (336)668-2762

F: (336)665-9556