



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 245G 1FF245GXCNF802665

Component
Right Final Drive

Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Right final drive)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0204091	---	---
Sample Date		Client Info		13 Feb 2024	---	---
Machine Age	hrs	Client Info		641	---	---
Oil Age	hrs	Client Info		641	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	282	---	---
Iron	ppm	ASTM D5185m	>750	244	---	---
Chromium	ppm	ASTM D5185m	>9	5	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	2	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>40	1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>75	24	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	0	---	---
Boron	ppm	ASTM D5185m	400	71	---	---
Barium	ppm	ASTM D5185m	200	19	---	---
Molybdenum	ppm	ASTM D5185m	12	3	---	---
Manganese	ppm	ASTM D5185m		5	---	---
Magnesium	ppm	ASTM D5185m	12	9	---	---
Calcium	ppm	ASTM D5185m	150	28	---	---
Phosphorus	ppm	ASTM D5185m	1650	595	---	---
Zinc	ppm	ASTM D5185m	125	24	---	---
Sulfur	ppm	ASTM D5185m	22500	18671	---	---
Visc @ 40°C	cSt	ASTM D445	143	184	---	---

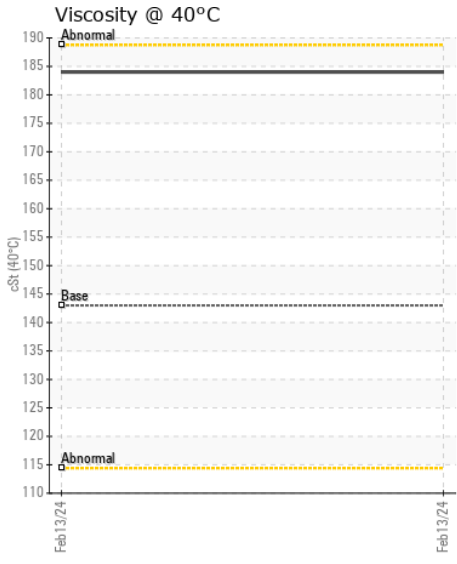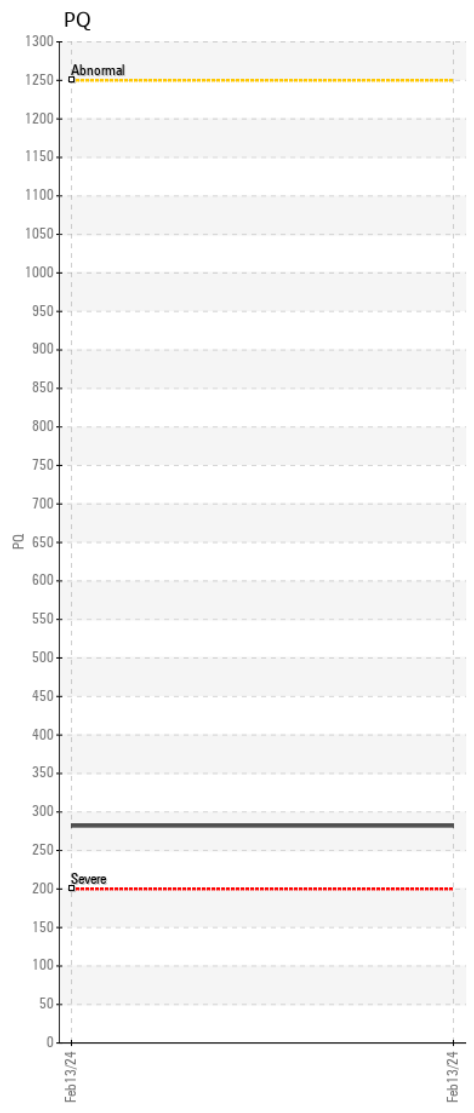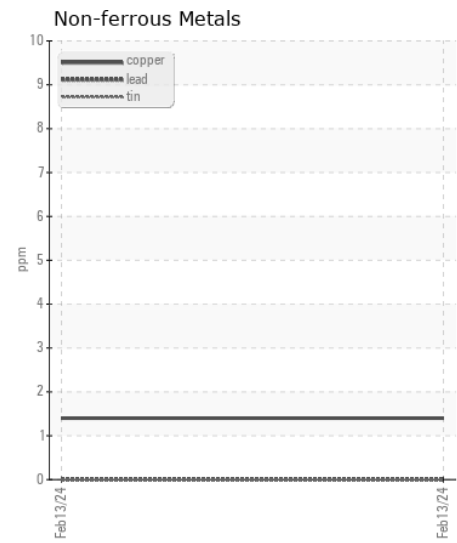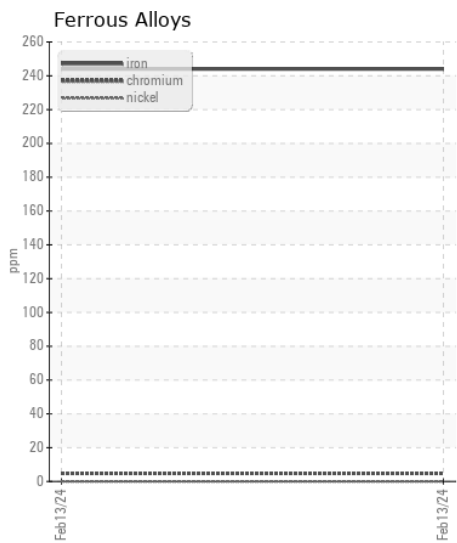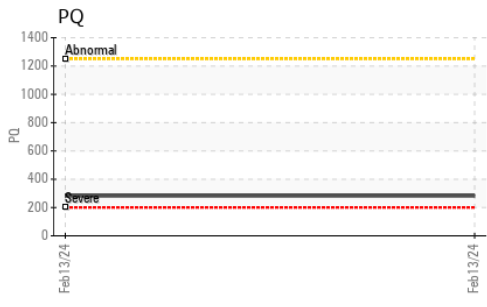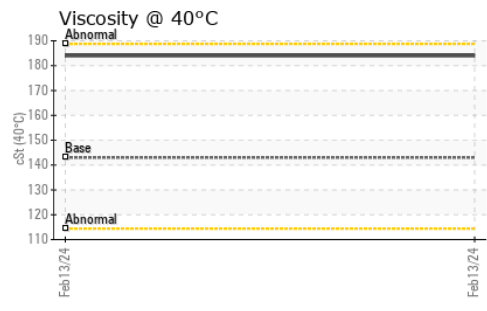

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0204091 **Received** : 14 Feb 2024
Lab Number : 06089108 **Tested** : 15 Feb 2024
Unique Number : 10876553 **Diagnosed** : 15 Feb 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409
 Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM
 T: (336)668-2762
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)