



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[A34439]
 Machine Id
JOHN DEERE 624L SIMS BARK (S/N 1DW624LTCKF696080)
 Component
Brake
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (3 QTS)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: A34439)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0005945	---	---
Sample Date		Client Info		12 Feb 2024	---	---
Machine Age	hrs	Client Info		3845	---	---
Oil Age	hrs	Client Info		845	---	---
Filter Age	hrs	Client Info		845	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		56	---	---
Iron	ppm	ASTM D5185m	>350	190	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		6	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>8	2	---	---
Lead	ppm	ASTM D5185m	>10	2	---	---
Copper	ppm	ASTM D5185m	>150	2	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	209	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	LIGHT	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		8	---	---
Boron	ppm	ASTM D5185m	6	78	---	---
Barium	ppm	ASTM D5185m	0	15	---	---
Molybdenum	ppm	ASTM D5185m	0	20	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	145	225	---	---
Calcium	ppm	ASTM D5185m	3570	3227	---	---
Phosphorus	ppm	ASTM D5185m	1290	1155	---	---
Zinc	ppm	ASTM D5185m	1640	1134	---	---
Sulfur	ppm	ASTM D5185m		4607	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	48.9	---	---

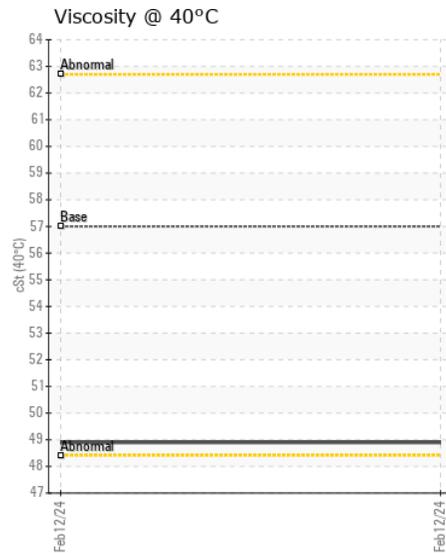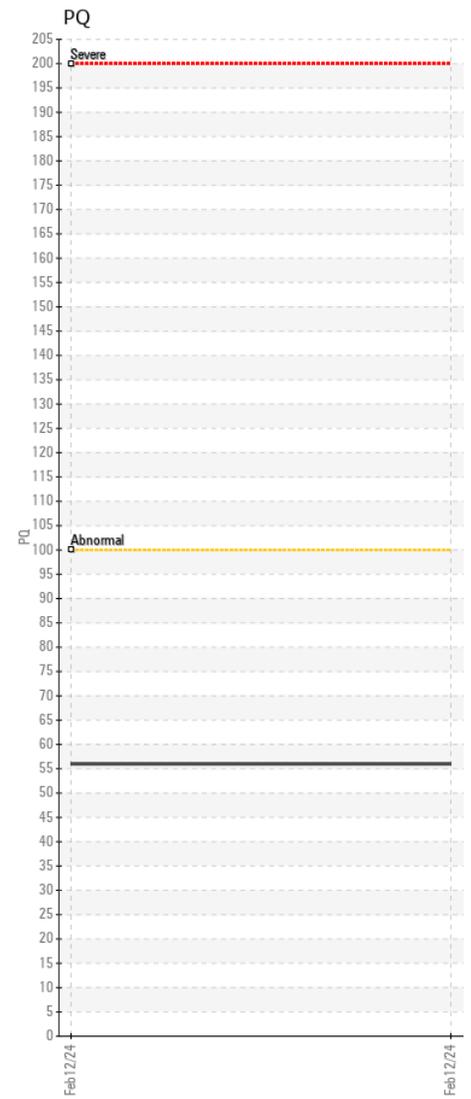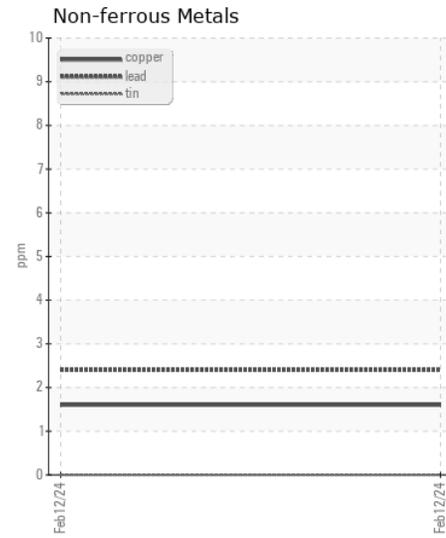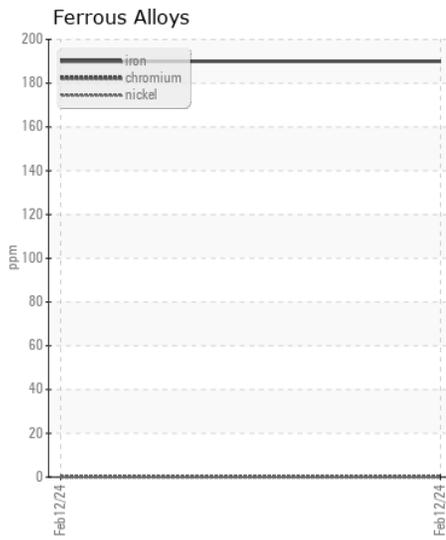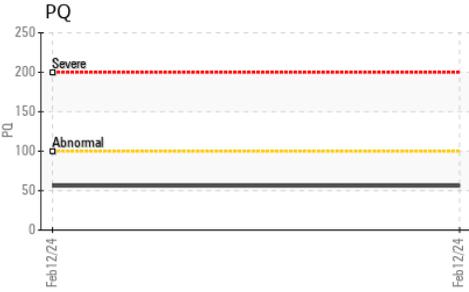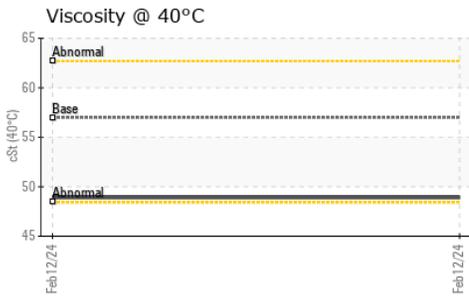

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0005945 **Received** : 14 Feb 2024
Lab Number : 06089120 **Tested** : 15 Feb 2024
Unique Number : 10876565 **Diagnosed** : 15 Feb 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

WARRIOR TRACTOR AND EQUIPMENT - HUNTSVILLE
 25135 ONE AVIATION WAY SW
 MADISON, AL
 US 35756
 Contact: BOBBY LUCKY
 warriorparts033@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: