



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A40G 352026
Component
Wet Disc Brake
Fluid
MOBIL MOBILFLUID 424 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP436360	VCP395132	VCP402959
Sample Date		Client Info		08 Feb 2024	30 Oct 2023	29 Aug 2023
Machine Age	hrs	Client Info		9959	9458	9029
Oil Age	hrs	Client Info		501	1993	1564
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	14	26	11
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	1	2	1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	2	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>75	11	18	11
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	17	17	12
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	3	2
Boron	ppm	ASTM D5185m		116	103	97
Barium	ppm	ASTM D5185m		12	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		16	7	12
Calcium	ppm	ASTM D5185m		3464	3133	2767
Phosphorus	ppm	ASTM D5185m		1313	1153	933
Zinc	ppm	ASTM D5185m		1381	1413	1143
Sulfur	ppm	ASTM D5185m		6459	5445	5480
Visc @ 40°C	cSt	ASTM D445	55	52.2	49.4	50.0

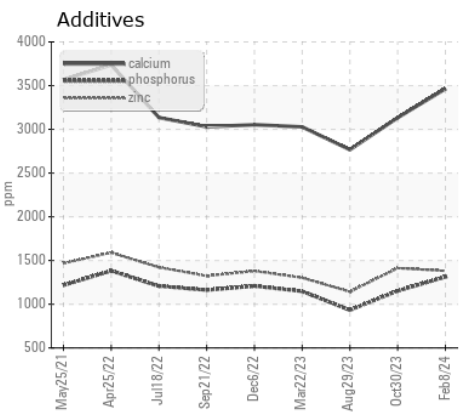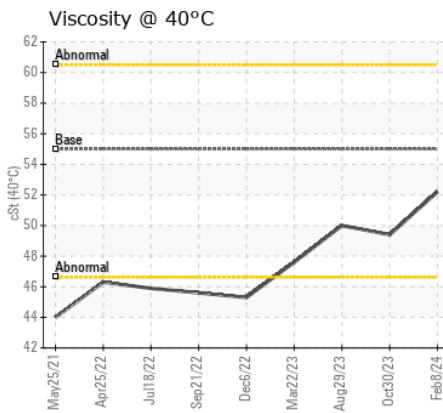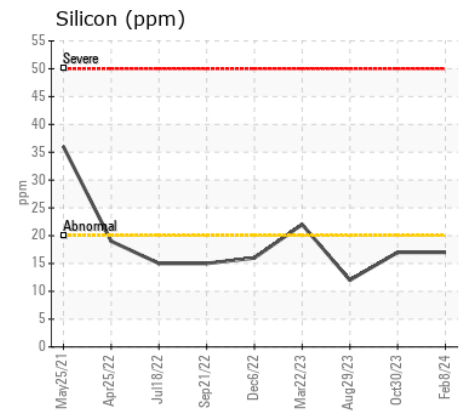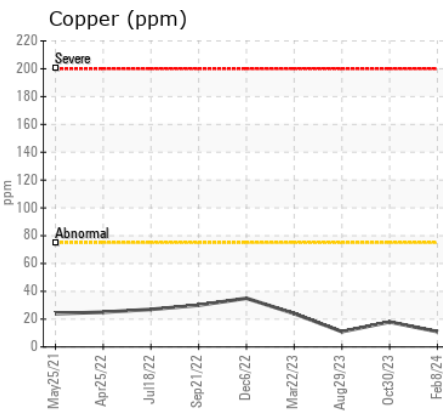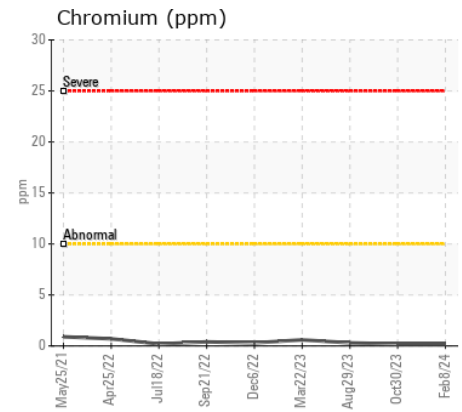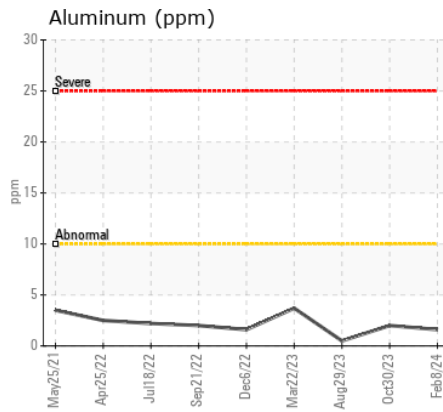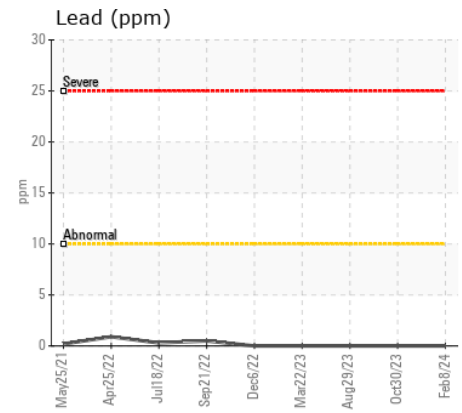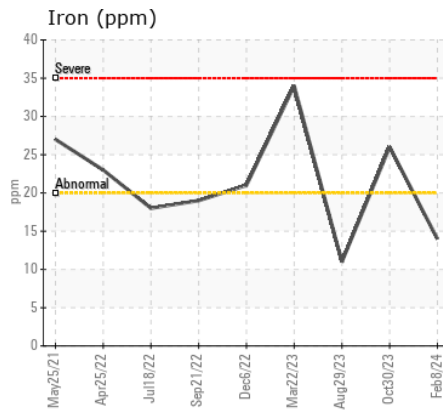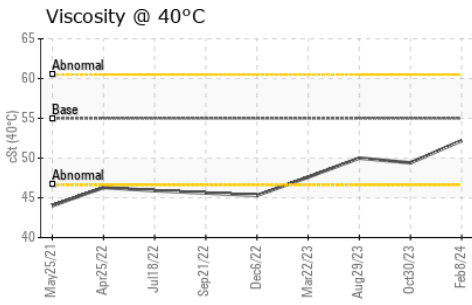

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP436360
Lab Number : 06089139
Unique Number : 10876584
Test Package : MOB 1

Received : 14 Feb 2024
Tested : 15 Feb 2024
Diagnosed : 16 Feb 2024 - Jonathan Hester

SCHILDBERG CONSTRUCTION COMPANY
 PO BOX 358
 GREENFIELD, IA
 US 50849
 Contact: SCOTT ARMSTRONG
 sarmstrong@schildberg.com
 T: (641)743-8237
 F: (641)743-2486

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)