



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
CHIP LACEY
Machine Id
[CHIP LACEY] 001 529830-1
Component
Port Main Engine
Fluid
CHEVRON DELO 710 LS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW06089604	MW0009325	MW0013158
Sample Date		Client Info		01 Feb 2024	01 Nov 2022	01 Aug 2021
Machine Age	hrs	Client Info		18869	17667	16591
Oil Age	hrs	Client Info		900	17667	16591
Filter Age	hrs	Client Info		0	610	302
Oil Changed		Client Info		N/A	N/A	Not Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	14	12	24
Chromium	ppm	ASTM D5185m	>8	<1	<1	2
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	2	2
Lead	ppm	ASTM D5185m	>18	5	6	13
Copper	ppm	ASTM D5185m	>80	13	11	24
Tin	ppm	ASTM D5185m	>14	4	4	6
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	4	4	4
Potassium	ppm	ASTM D5185m	>20	2	0	5
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.2	1.1	▲ 5.1
Nitration	Abs/cm	*ASTM D7624	>20	7.6	7.4	12.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	15.9	16.6	25.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	3	1	2
Boron	ppm	ASTM D5185m		32	40	29
Barium	ppm	ASTM D5185m		5	0	0
Molybdenum	ppm	ASTM D5185m		37	43	42
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		12	15	12
Calcium	ppm	ASTM D5185m		2606	3472	3477
Phosphorus	ppm	ASTM D5185m		37	7	3
Zinc	ppm	ASTM D5185m		0	3	6
Sulfur	ppm	ASTM D5185m		1897	2471	1998
Oxidation	Abs/.1mm	*ASTM D7414	>25	7.4	6.9	10
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	9.43	9.00	8.79
Visc @ 100°C	cSt	ASTM D445	15.5	14.99	14.8	▲ 19.7

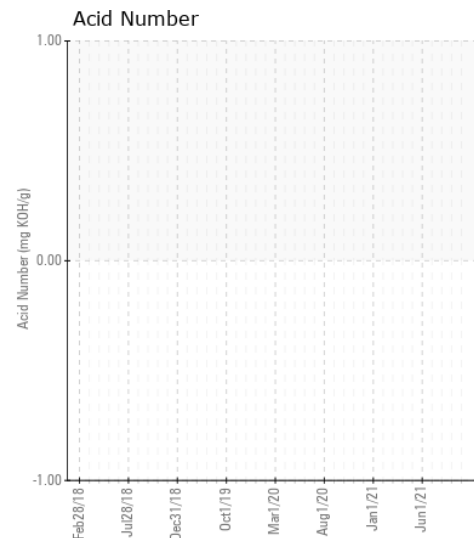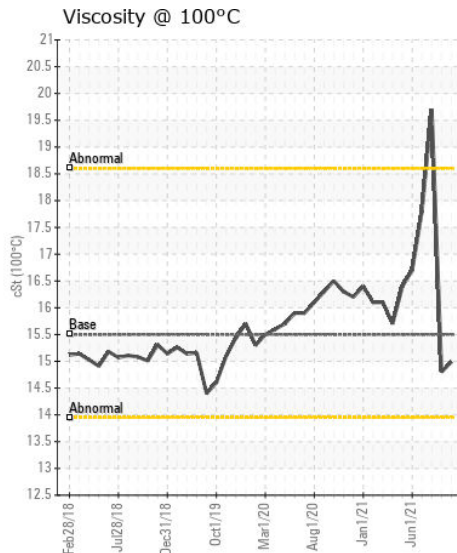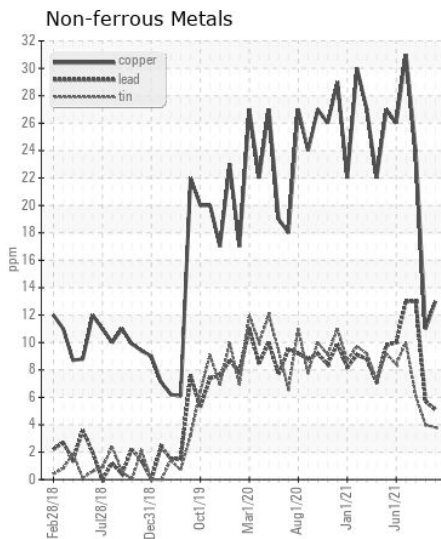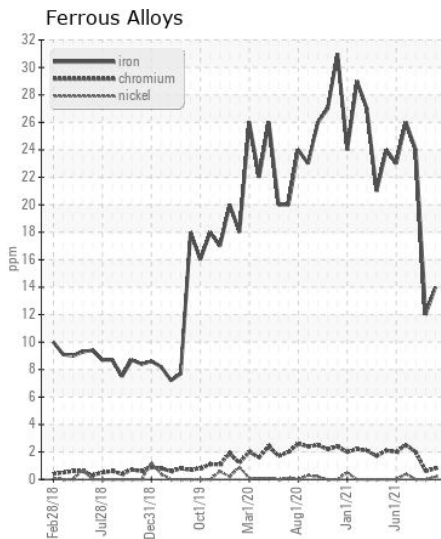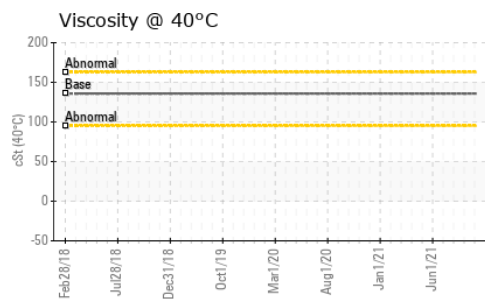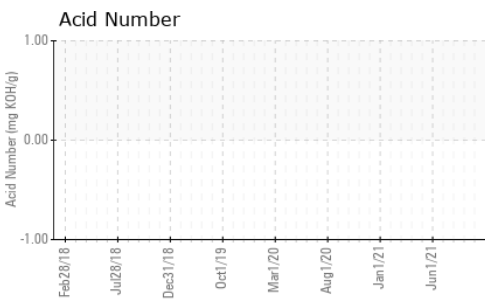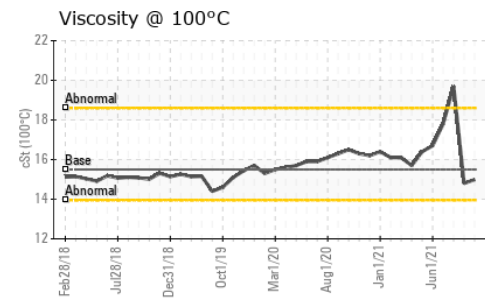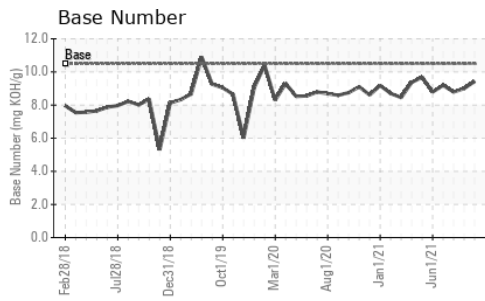

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW06089604

Lab Number : 06089604

Unique Number : 10877049

Test Package : MAR 2 (Additional Tests: KV40)

Received : 14 Feb 2024

Tested : 19 Feb 2024

Diagnosed : 19 Feb 2024 - Jonathan Hester

INGRAM BARGE

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ANTHONY VAN CURA

anthony.vancura@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)