



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**EMD MARC 27 MAIN**  
 Component  
**Diesel Engine**  
 Fluid  
**BRAD PENN DDS PLUS SAE 40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0034566</b>	DC0028912	DC0025684
Sample Date		Client Info		<b>21 Feb 2024</b>	02 Jan 2024	09 Aug 2023
Machine Age	mls	Client Info		<b>0</b>	0	0
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>21</b>	19	19
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	3	3
Lead	ppm	ASTM D5185m	>40	<b>8</b>	9	9
Copper	ppm	ASTM D5185m	>330	<b>34</b>	38	34
Tin	ppm	ASTM D5185m	>15	<b>6</b>	7	7
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	<1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.5	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.8</b>	10.0	10.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.3</b>	17.6	17.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	<1	2
Boron	ppm	ASTM D5185m		<b>34</b>	30	31
Barium	ppm	ASTM D5185m		<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m		<b>48</b>	46	49
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>17</b>	16	18
Calcium	ppm	ASTM D5185m		<b>3439</b>	3168	3345
Phosphorus	ppm	ASTM D5185m		<b>37</b>	61	56
Zinc	ppm	ASTM D5185m	10	<b>21</b>	22	42
Sulfur	ppm	ASTM D5185m		<b>3029</b>	3347	3625
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>11.2</b>	11.8	11.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.2	<b>7.9</b>	8.09	9.08
Visc @ 100°C	cSt	ASTM D445	14.7	<b>14.2</b>	14.0	14.1

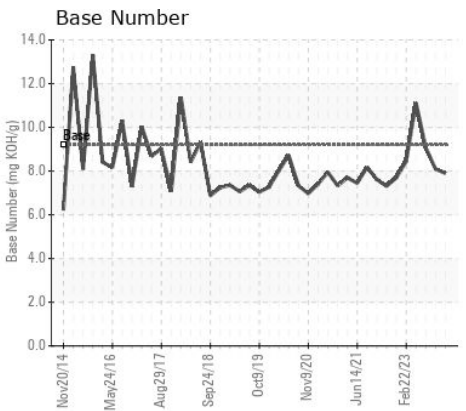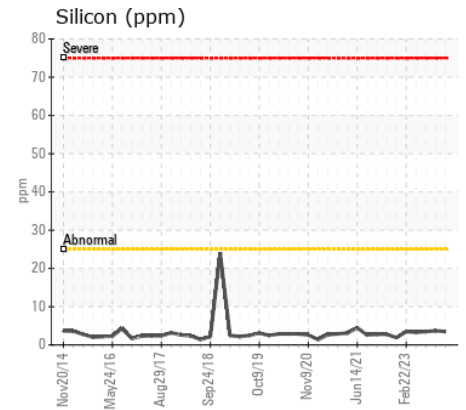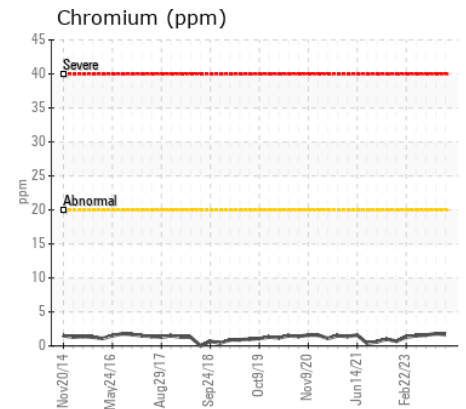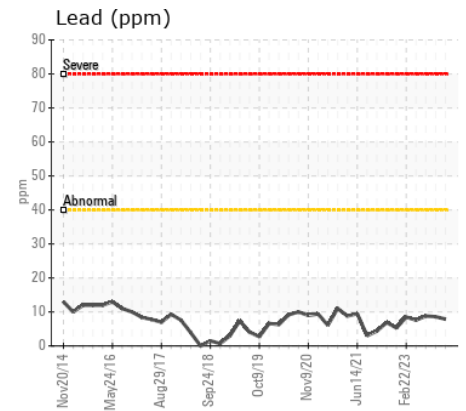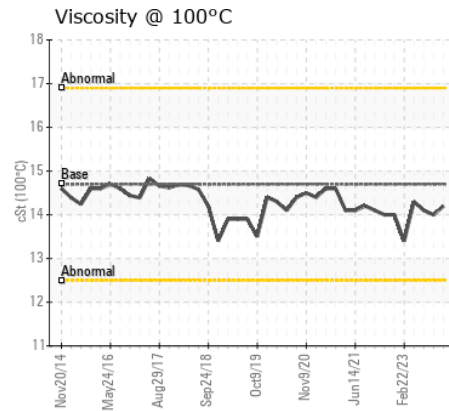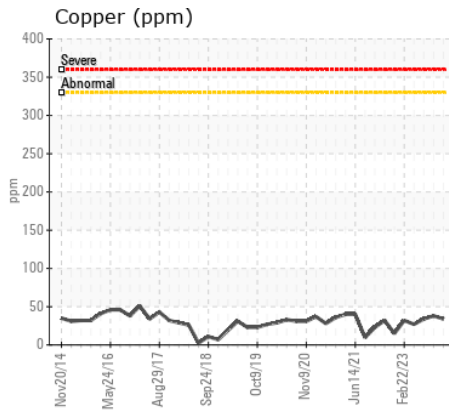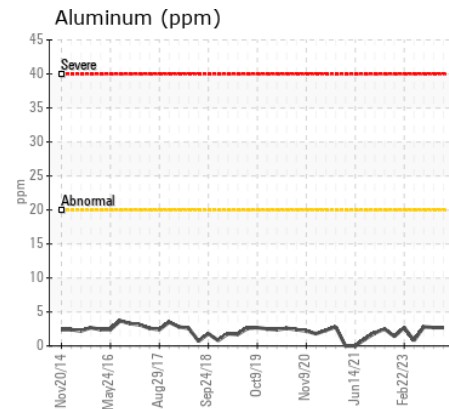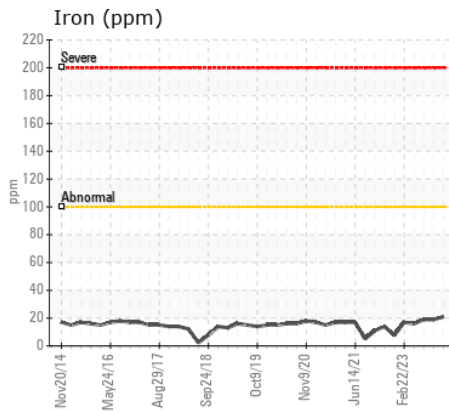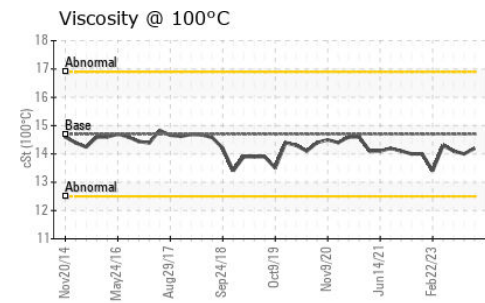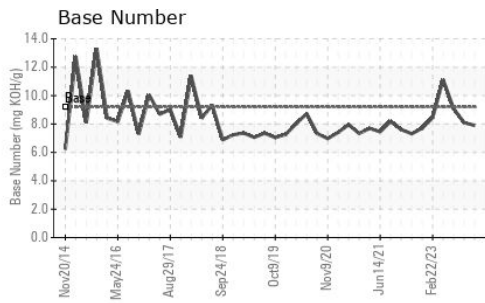

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : DC0034566

**Lab Number** : 06098857

**Unique Number** : 10897087

**Test Package** : MOB 1 ( Additional Tests: TBN )

**Received** : 23 Feb 2024

**Tested** : 26 Feb 2024

**Diagnosed** : 26 Feb 2024 - Wes Davis

**ALSTOM - BALTIMORE**

1600 LUDLOW ST

BALTIMORE, MD

US 21230

Contact: SEAN MCCARTY

sean.mccarty@rail.bombardier.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (443)220-0469