



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
3109
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 XLE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0833167	WC0627430	WC0702465
Sample Date		Client Info		09 Feb 2024	04 Jun 2023	31 Oct 2022
Machine Age	hrs	Client Info		351983	296335	255296
Oil Age	hrs	Client Info		56363	41409	38708
Filter Age	hrs	Client Info		56363	41409	38708
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	26	18	17
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	3	3	4
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	7	6	5
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	9	5	8
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	13	11	6
Potassium	ppm	ASTM D5185m	>20	12	9	1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	11.2	10.3	11
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.7	24.5	26
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	5	2
Boron	ppm	ASTM D5185m		22	22	23
Barium	ppm	ASTM D5185m		0	0	8
Molybdenum	ppm	ASTM D5185m		<1	0	3
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		832	762	689
Calcium	ppm	ASTM D5185m	2900	1537	1433	1136
Phosphorus	ppm	ASTM D5185m	1100	749	743	704
Zinc	ppm	ASTM D5185m	1200	892	900	760
Sulfur	ppm	ASTM D5185m	4000	3066	3017	2944
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.2	19.3	20.7
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	5.4	5.8	6.3
Visc @ 100°C	cSt	ASTM D445	11.9	12.1	11.7	11.9

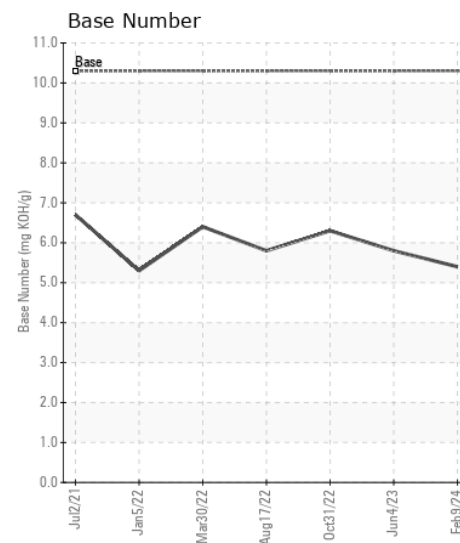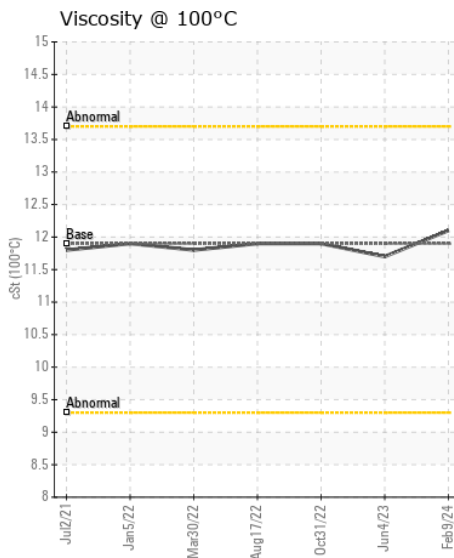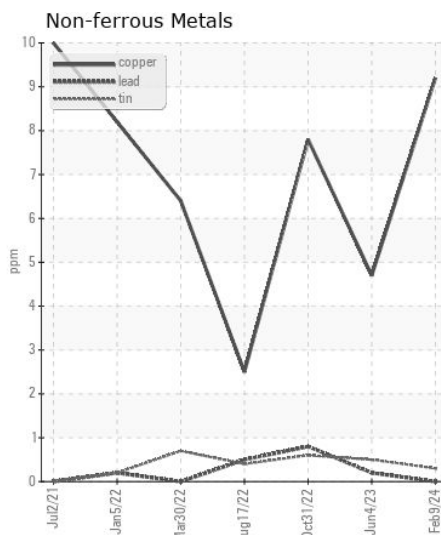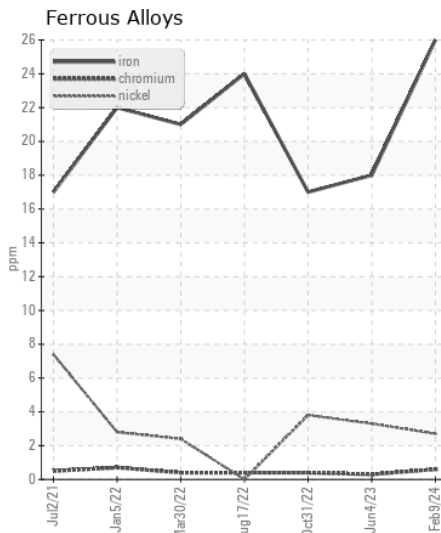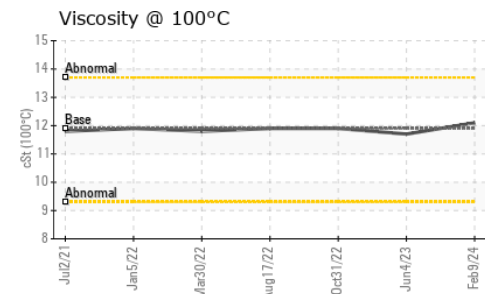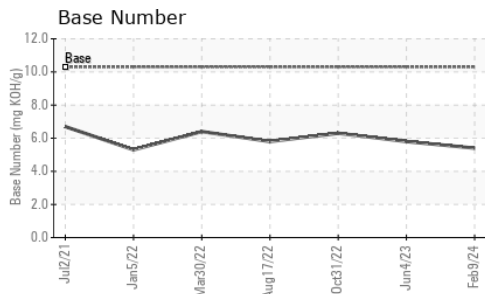

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0833167
Lab Number : 06098937
Unique Number : 10897167
Test Package : FLEET
Received : 23 Feb 2024
Tested : 26 Feb 2024
Diagnosed : 26 Feb 2024 - Wes Davis

LTI/MILKY WAY - MOSES
 120 WISER LANE
 MOSES LAKE, WA
 US 98837
 Contact: MIGUEL PEREZ
 mperez@lynden.com; doug@wearcheckusa.com
 T: (509)765-5840
 F: (500)765-5636

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)