



# OIL ANALYSIS REPORT

|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**KENWORTH 3064**  
Component  
**Diesel Engine**  
Fluid  
**CHEVRON DELO 400 XLE 10W30 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>WC0833158</b>   | WC0702412   | WC0702495   |
| Sample Date    |     | Client Info |           | <b>07 Feb 2024</b> | 23 Aug 2022 | 01 Jun 2022 |
| Machine Age    | mls | Client Info |           | <b>603506</b>      | 420725      | 380501      |
| Oil Age        | mls | Client Info |           | <b>102271</b>      | 40000       | 40000       |
| Filter Age     | mls | Client Info |           | <b>102271</b>      | 40000       | 40000       |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Filter Changed |     | Client Info |           | <b>N/A</b>         | Changed     | Changed     |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## WEAR

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >100 | <b>44</b>    | 16   | 17   |
| Chromium     | ppm    | ASTM D5185m | >20  | <b>1</b>     | <1   | <1   |
| Nickel       | ppm    | ASTM D5185m | >4   | <b>0</b>     | 2    | 0    |
| Titanium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | <1   | 0    |
| Silver       | ppm    | ASTM D5185m | >3   | <b>0</b>     | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >20  | <b>8</b>     | 4    | 5    |
| Lead         | ppm    | ASTM D5185m | >40  | <b>&lt;1</b> | <1   | 0    |
| Copper       | ppm    | ASTM D5185m | >330 | <b>5</b>     | 9    | 4    |
| Tin          | ppm    | ASTM D5185m | >15  | <b>&lt;1</b> | <1   | <1   |
| Vanadium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | 0    | 0    |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

## CONTAMINATION







There is no indication of any contamination in the oil.

|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >25   | <b>12</b>      | 6     | 5     |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>7</b>       | <1    | 2     |
| Fuel             |          | WC Method   | >5    | <b>&lt;1.0</b> | <1.0  | <1.0  |
| Water            |          | WC Method   | >0.2  | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 | >3    | <b>1.2</b>     | 0.7   | 0.7   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>13.3</b>    | 11.7  | 10.7  |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>31.2</b>    | 27    | 25.8  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.2  | <b>NEG</b>     | NEG   | NEG   |

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |              |      |      |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium           | ppm      | ASTM D5185m |      | <b>5</b>     | 2    | 2    |
| Boron            | ppm      | ASTM D5185m |      | <b>23</b>    | 23   | 30   |
| Barium           | ppm      | ASTM D5185m |      | <b>0</b>     | 8    | 0    |
| Molybdenum       | ppm      | ASTM D5185m |      | <b>2</b>     | 5    | 6    |
| Manganese        | ppm      | ASTM D5185m |      | <b>&lt;1</b> | <1   | <1   |
| Magnesium        | ppm      | ASTM D5185m |      | <b>887</b>   | 731  | 747  |
| Calcium          | ppm      | ASTM D5185m | 2900 | <b>1612</b>  | 1409 | 1449 |
| Phosphorus       | ppm      | ASTM D5185m | 1100 | <b>789</b>   | 729  | 710  |
| Zinc             | ppm      | ASTM D5185m | 1200 | <b>942</b>   | 867  | 866  |
| Sulfur           | ppm      | ASTM D5185m | 4000 | <b>3063</b>  | 3186 | 2817 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>29.7</b>  | 22   | 21.2 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 10.3 | <b>3.8</b>   | 6.3  | 5.1  |
| Visc @ 100°C     | cSt      | ASTM D445   | 11.9 | <b>13.1</b>  | 12.4 | 12.2 |

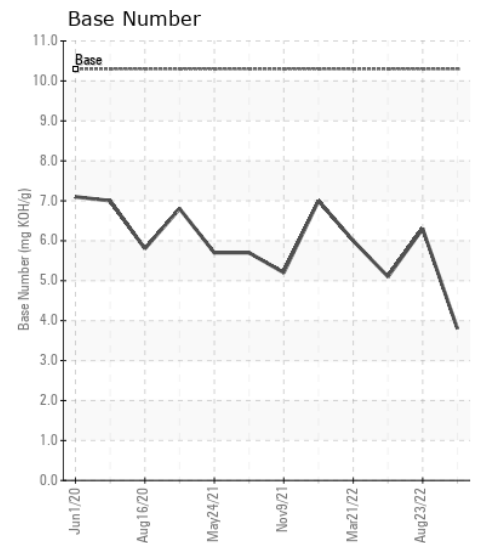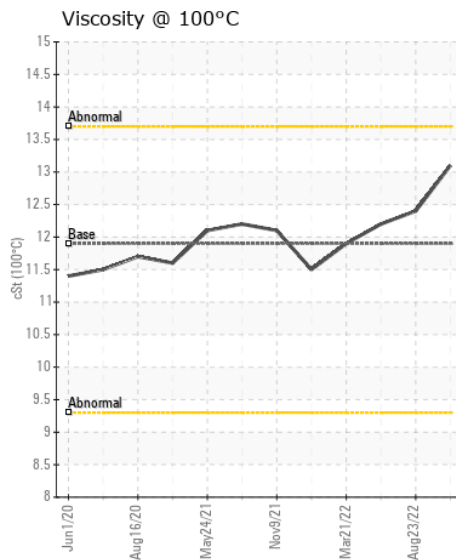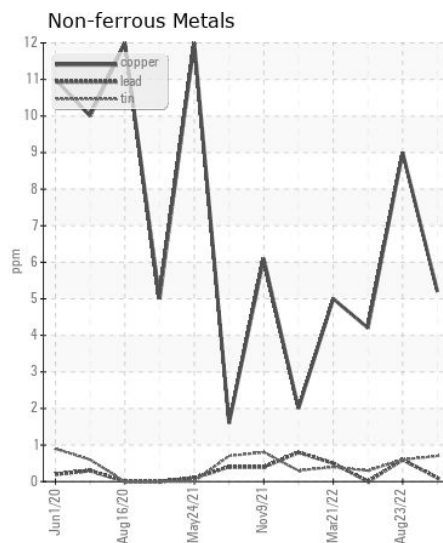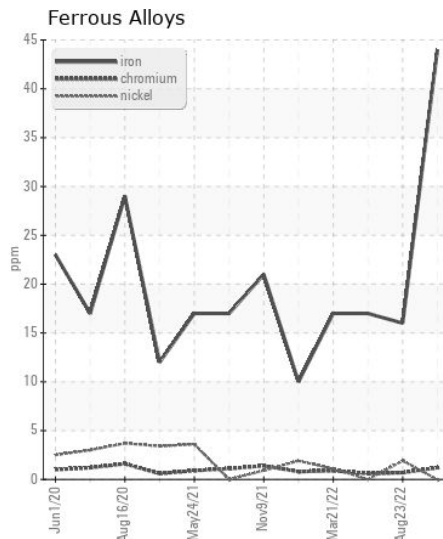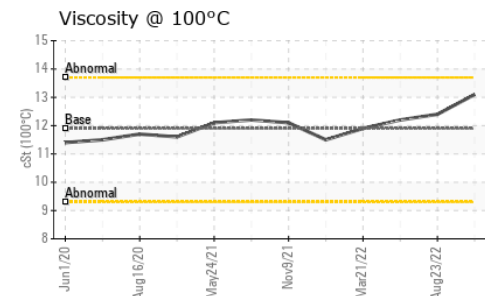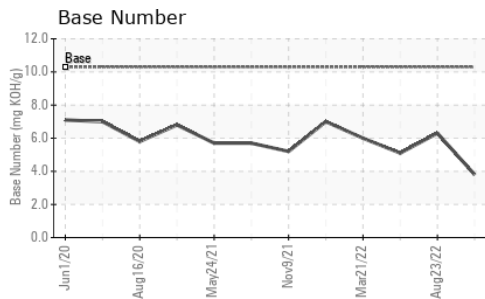

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0833158  
**Lab Number** : 06098939  
**Unique Number** : 10897169  
**Test Package** : FLEET  
**Received** : 23 Feb 2024  
**Tested** : 26 Feb 2024  
**Diagnosed** : 26 Feb 2024 - Don Baldrige

**LTI/MILKY WAY - MOSES**  
 120 WISER LANE  
 MOSES LAKE, WA  
 US 98837

Contact: MIGUEL PEREZ  
 mperex@lynden.com; doug@wearcheckusa.com  
 T: (509)765-5840  
 F: (509)765-5636

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)