



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**FORGE 3**  
Component  
**Lube System**  
Fluid  
**SHELL TELLUS S2 MX 68 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0408467	---	---
Sample Date		Client Info		15 Feb 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	2	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>20	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>20	<1	---	---
Lead	ppm	ASTM D5185m	>20	1	---	---
Copper	ppm	ASTM D5185m	>20	16	---	---
Tin	ppm	ASTM D5185m	>20	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>15	3	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.05	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		2	---	---
Barium	ppm	ASTM D5185m		5	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		53	---	---
Calcium	ppm	ASTM D5185m		23	---	---
Phosphorus	ppm	ASTM D5185m		213	---	---
Zinc	ppm	ASTM D5185m		310	---	---
Sulfur	ppm	ASTM D5185m		840	---	---
Visc @ 40°C	cSt	ASTM D445	68.0	64.8	---	---

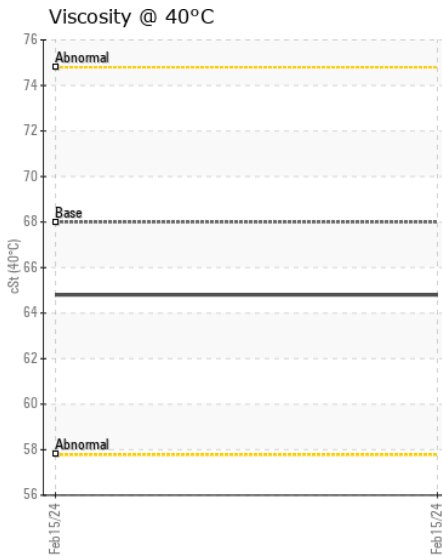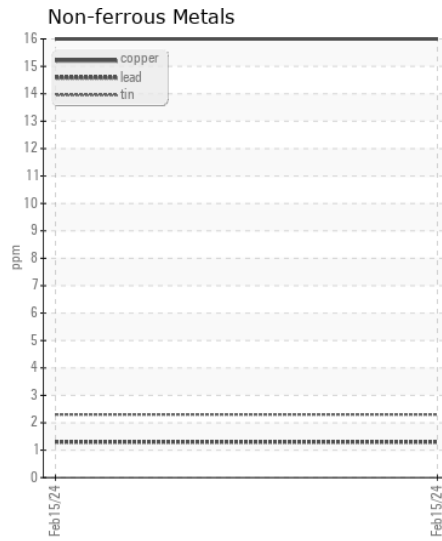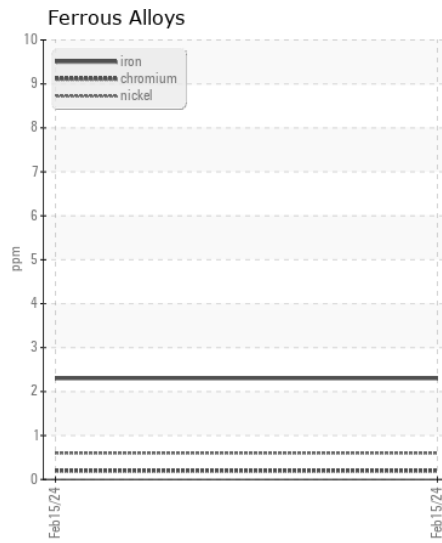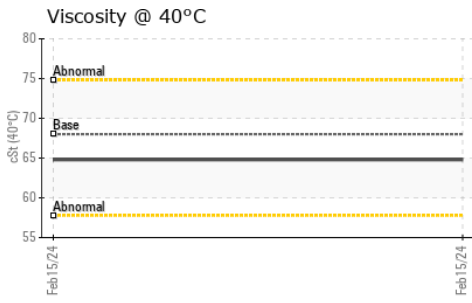

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : WC0408467

**Lab Number** : 06099506

**Unique Number** : 10897736

**Test Package** : IND 1

**Received** : 23 Feb 2024

**Tested** : 26 Feb 2024

**Diagnosed** : 27 Feb 2024 - Don Baldrige

**DANIEL DEFENSE**

101 WARFIGHTER WAY

BLACK CREEK, GA

US 31308

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: