



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	MARGINAL
FLUID CONDITION	NORMAL

Machine Id
SZLG 730120
Component
Diesel Engine
Fluid
{not provided} (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0814675	WC0452220	---
Sample Date		Client Info		17 Dec 2023	10 May 2020	---
Machine Age	hrs	Client Info		4618	1514	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Changed	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				MARGINAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	7	16	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		0	8	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	3	5	---
Lead	ppm	ASTM D5185m	>40	1	0	---
Copper	ppm	ASTM D5185m	>330	2	6	---
Tin	ppm	ASTM D5185m	>15	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185m	>25	5	6	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Fuel	%	ASTM D3524	>5	▲ 2.8	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	6.5	8.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.4	20.2	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		8	5	---
Boron	ppm	ASTM D5185m		386	146	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		84	51	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		402	665	---
Calcium	ppm	ASTM D5185m		1382	1566	---
Phosphorus	ppm	ASTM D5185m		989	721	---
Zinc	ppm	ASTM D5185m		1207	797	---
Sulfur	ppm	ASTM D5185m		3123	2378	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.0	15.9	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.2	7.6	---
Visc @ 100°C	cSt	ASTM D445		12.2	12.6	---

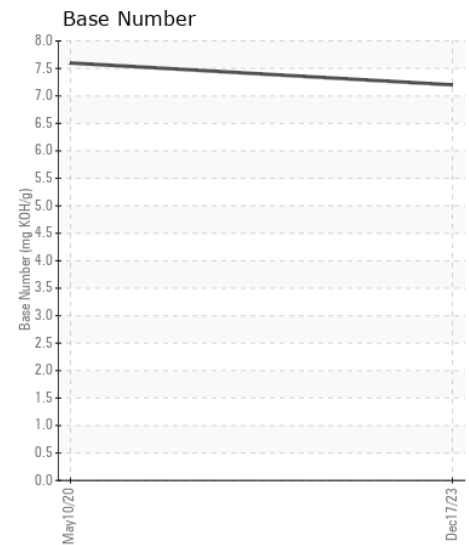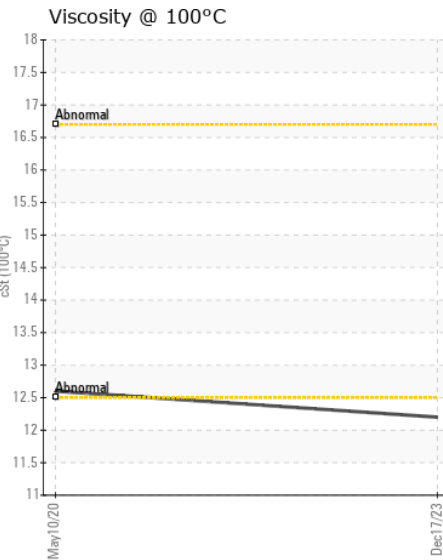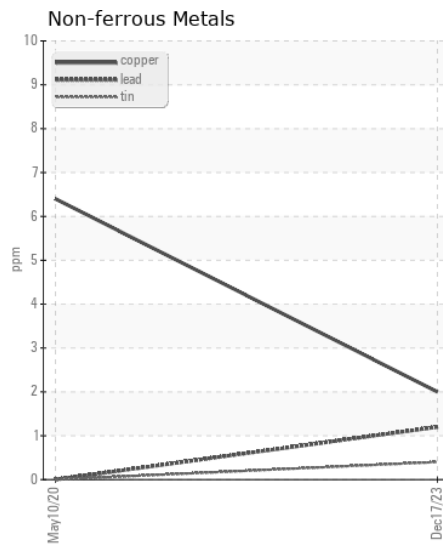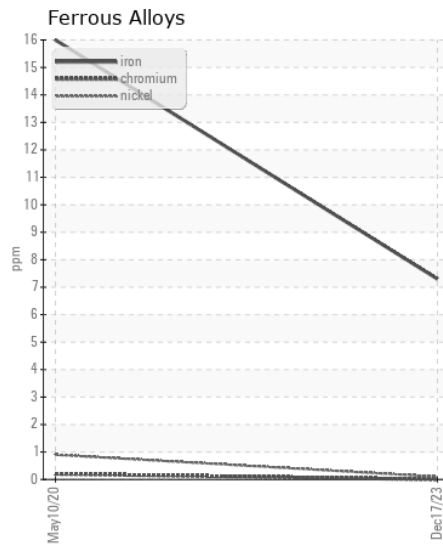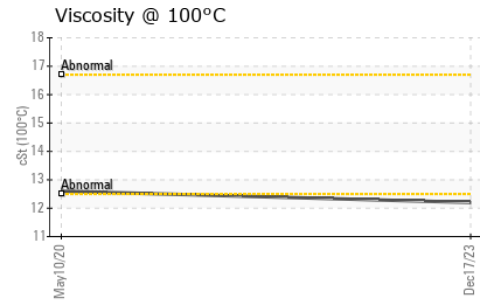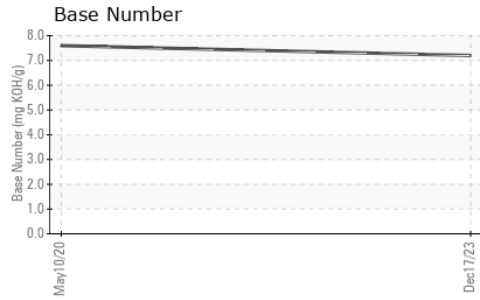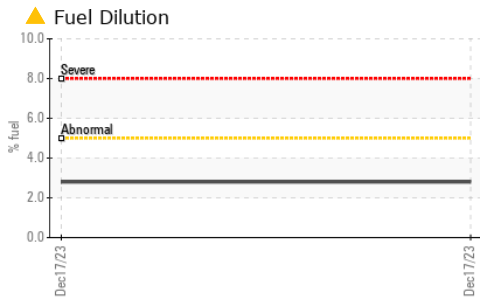

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0814675

Lab Number : 06099736

Unique Number : 10897966

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Received : 26 Feb 2024

Tested : 28 Feb 2024

Diagnosed : 28 Feb 2024 - Wes Davis

DOLE FRESH FRUIT

PO BOX 725, ATTN: MAINTENANCE AND REPAIR

NEW CASTLE, DE

US 19720

Contact: LUIS LAPIERRE

luis.lapierre@dole.com

T: (302)652-6344

F: (302)652-6061

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)