



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
MACK 429115-SW4909
Component
Diesel Engine
Fluid
MOBIL DELVAC ELITE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0111354	---	---
Sample Date		Client Info		22 Jan 2024	---	---
Machine Age	hrs	Client Info		13305	---	---
Oil Age	hrs	Client Info		500	---	---
Filter Age	hrs	Client Info		500	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	3	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	<1	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>4	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	10.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		60	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		120	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		618	---	---
Calcium	ppm	ASTM D5185m		1163	---	---
Phosphorus	ppm	ASTM D5185m		673	---	---
Zinc	ppm	ASTM D5185m		760	---	---
Sulfur	ppm	ASTM D5185m		2905	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	5.3	---	---
Visc @ 100°C	cSt	ASTM D445	15.2	12.9	---	---

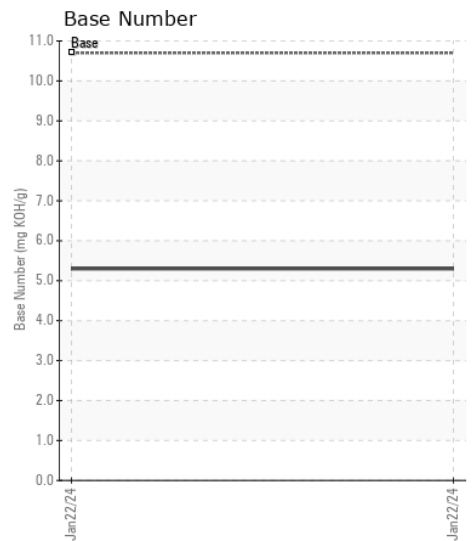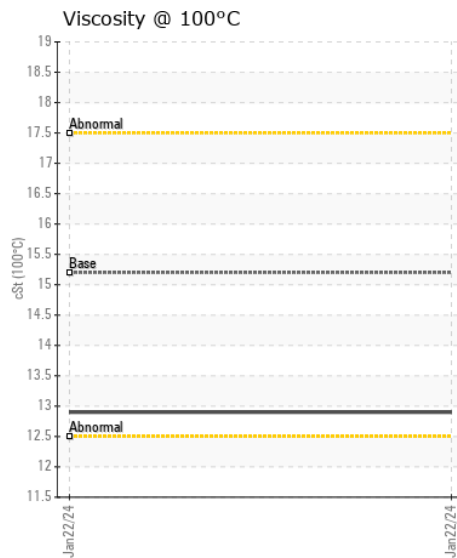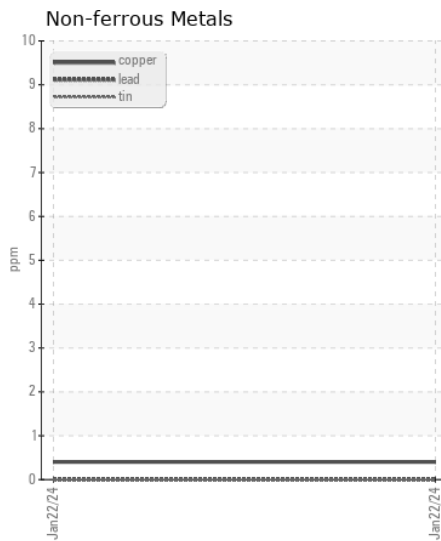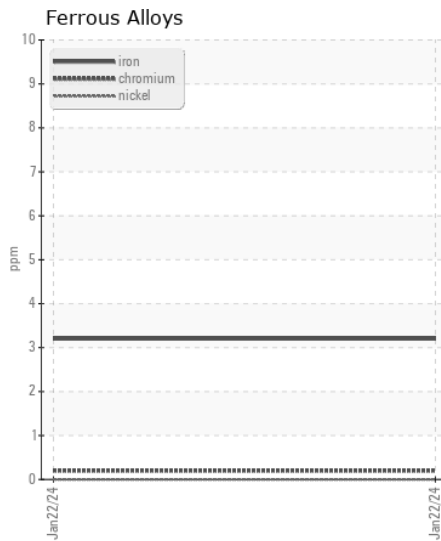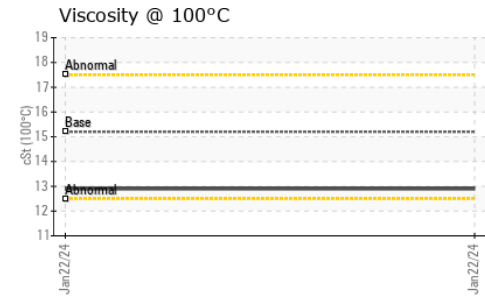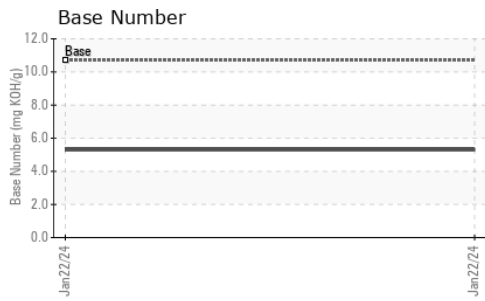

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0111354 **Received** : 26 Feb 2024
Lab Number : 06099797 **Tested** : 27 Feb 2024
Unique Number : 10898027 **Diagnosed** : 27 Feb 2024 - Don Baldrige
Test Package : FLEET

GFL Environmental - 981 - Port Arthur Hauling
 1000 S Business Park Dr
 Port Arthur, TX
 US 77640
 Contact: MICHAEL KAY
 mkay@gflenv.com
 T: (336)660-9331
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)