



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L150H 4487
Component
Diesel Engine
Fluid
MOBIL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP331515	VCP312839	VCP331584
Sample Date		Client Info		01 Feb 2024	18 Dec 2023	09 Nov 2023
Machine Age	hrs	Client Info		18196	17985	17740
Oil Age	hrs	Client Info		211	245	234
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	2	<1	0
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	3	3	2
Lead	ppm	ASTM D5185m	>40	<1	0	0
Copper	ppm	ASTM D5185m	>20	<1	0	<1
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	7	3	4
Potassium	ppm	ASTM D5185m	>20	2	2	<1
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.2	7.9	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.5	17.9	18.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>118	3	<1	2
Boron	ppm	ASTM D5185m		102	127	124
Barium	ppm	ASTM D5185m		34	0	0
Molybdenum	ppm	ASTM D5185m		94	116	112
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		522	627	691
Calcium	ppm	ASTM D5185m		1165	1187	1339
Phosphorus	ppm	ASTM D5185m		599	762	715
Zinc	ppm	ASTM D5185m		753	813	931
Sulfur	ppm	ASTM D5185m		2922	3593	3290
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.5	14.6	15.4
Base Number (BN)	mg KOH/g	ASTM D2896		7.6	6.6	7.1
Visc @ 100°C	cSt	ASTM D445		13.0	13.1	13.2

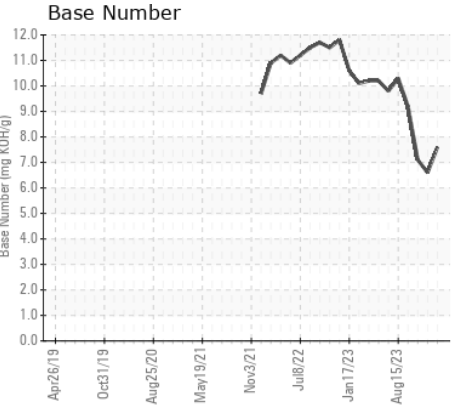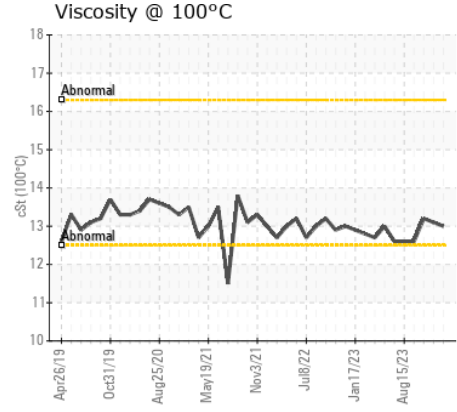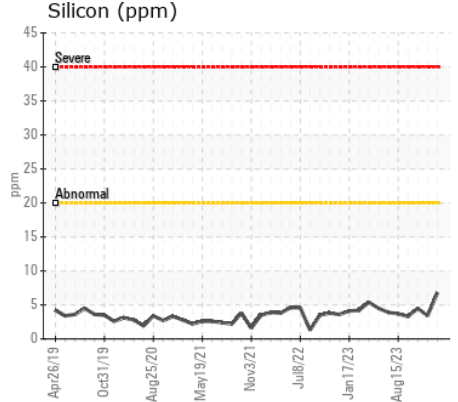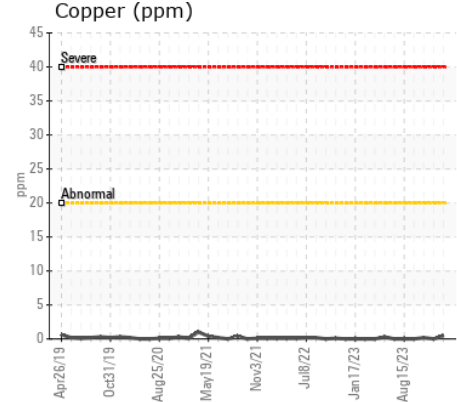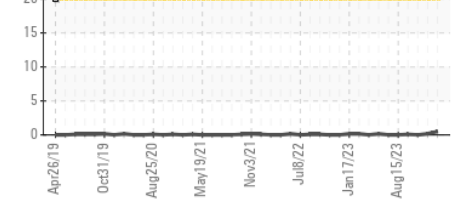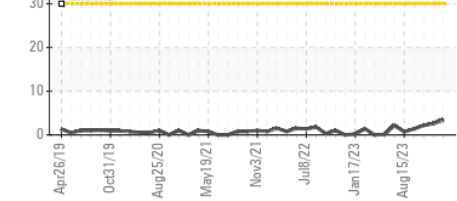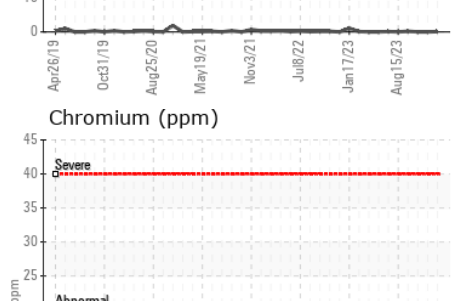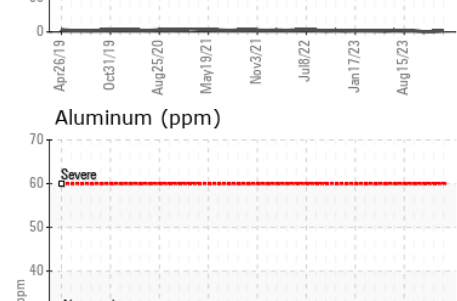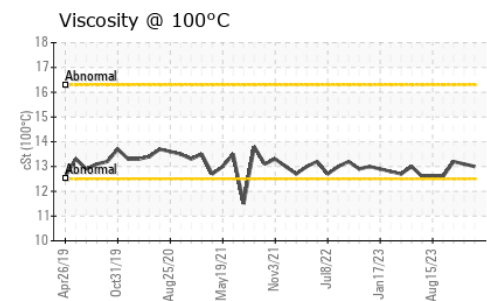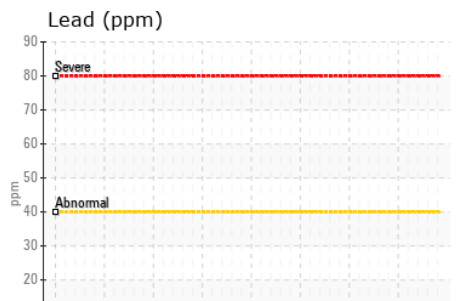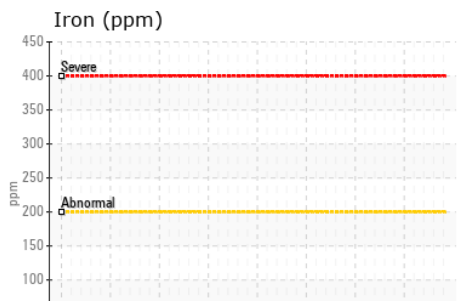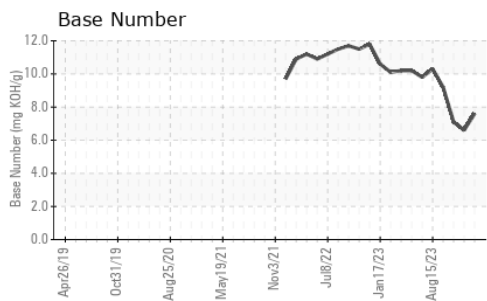

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP331515 **Received** : 26 Feb 2024
Lab Number : 06099963 **Tested** : 27 Feb 2024
Unique Number : 10898193 **Diagnosed** : 27 Feb 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

SCHILDBERG CONSTRUCTION COMPANY
 PO BOX 358
 GREENFIELD, IA
 US 50849
 Contact: SCOTT ARMSTRONG
 sarmstrong@schildberg.com
 T: (641)743-8237
 F: (641)743-2486

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)