



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PETERBILT 21410
Component
Diesel Engine
Fluid
SHELL ROTELLA T 10W30 (56 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0909760	WC0801715	WC0801682
Sample Date		Client Info		22 Feb 2024	13 Jun 2023	10 May 2023
Machine Age	mls	Client Info		288281	5869	273923
Oil Age	mls	Client Info		7707	5869	7213
Filter Age	mls	Client Info		7707	5869	7213
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>165	<1	6	10
Chromium	ppm	ASTM D5185m	>5	<1	<1	0
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	<1	3
Lead	ppm	ASTM D5185m	>150	3	0	<1
Copper	ppm	ASTM D5185m	>90	0	<1	<1
Tin	ppm	ASTM D5185m	>5	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	24	4	4
Potassium	ppm	ASTM D5185m	>20	5	4	2
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>7.5	0.3	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	10.4	10.0	10.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.6	23.3	26.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	2
Boron	ppm	ASTM D5185m	269	113	147	123
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	0	12	20	17
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	20	103	123	116
Calcium	ppm	ASTM D5185m	1521	2281	2287	2206
Phosphorus	ppm	ASTM D5185m	948	1081	1071	997
Zinc	ppm	ASTM D5185m	893	1325	1300	1226
Sulfur	ppm	ASTM D5185m		3513	4173	3793
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.7	19.5	21.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.4	7.3	6.0
Visc @ 100°C	cSt	ASTM D445	11.0	12.3	12.6	12.8

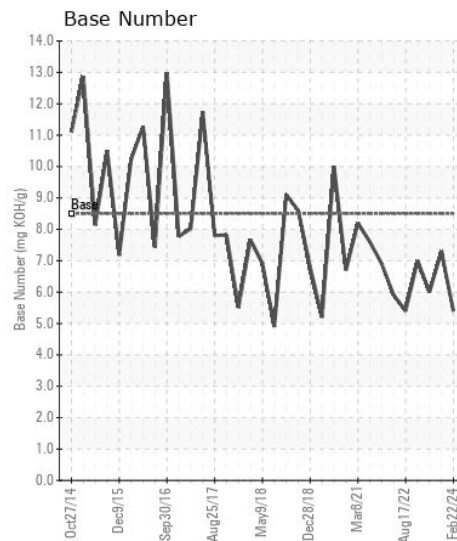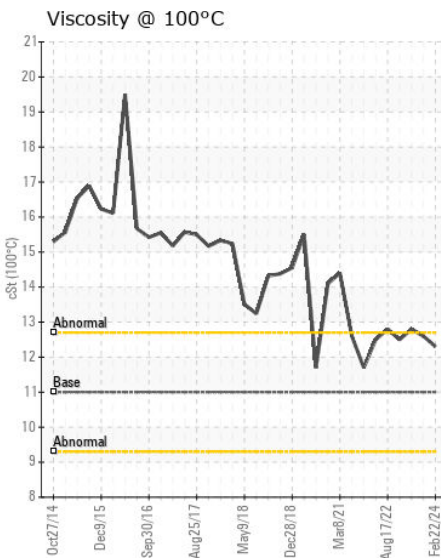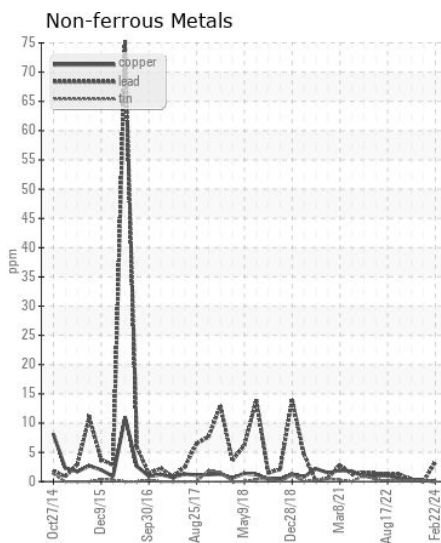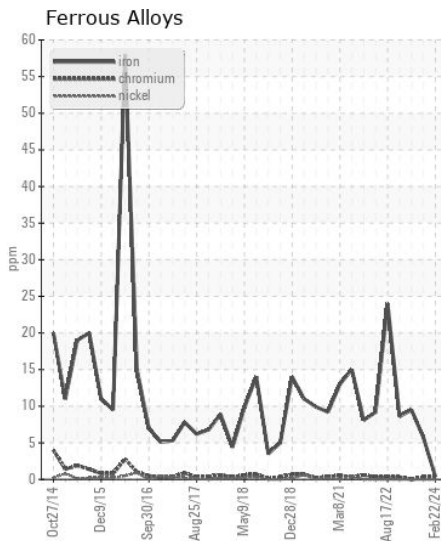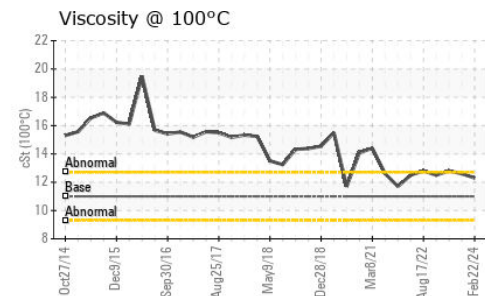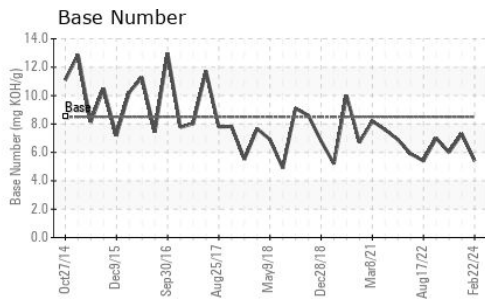

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0909760
Lab Number : 06100692
Unique Number : 10898922
Test Package : FLEET

Received : 26 Feb 2024
Tested : 27 Feb 2024
Diagnosed : 28 Feb 2024 - Sean Felton

GUY M TURNER & TURNER TRANSFER
 4505 SOUTH HOLDEN ROAD
 GREENSBORO, NC
 US 27406
 Contact: ROGER HIXSON
 rhixson@guyturner.com
 T: (336)294-4660
 F: (336)294-6644

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)