



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KEMP QUARRIES / BCS - GRAVETTE [67745]
Machine Id
WL124
Component
Rear Left Final Drive
Fluid
PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Pm3)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0069790	PCA0086999	PCA0084626
Sample Date		Client Info		08 Feb 2024	12 Oct 2023	06 Jul 2023
Machine Age	hrs	Client Info		37365	37365	36752
Oil Age	hrs	Client Info		36319	37365	36752
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	51	52	46
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m	>15	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>75	1	2	2
Lead	ppm	ASTM D5185m	>10	0	<1	<1
Copper	ppm	ASTM D5185m	>75	1	3	2
Tin	ppm	ASTM D5185m	>8	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	15	14	12
Potassium	ppm	ASTM D5185m	>20	0	2	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	2
Boron	ppm	ASTM D5185m	2	0	3	2
Barium	ppm	ASTM D5185m	0	0	9	0
Molybdenum	ppm	ASTM D5185m	0	0	2	1
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	9	17	17	20
Calcium	ppm	ASTM D5185m	3114	2399	3033	3147
Phosphorus	ppm	ASTM D5185m	1099	896	1024	1059
Zinc	ppm	ASTM D5185m	1245	1165	1240	1304
Sulfur	ppm	ASTM D5185m	7086	4974	5847	6294
Visc @ 40°C	cSt	ASTM D445	213.9	175	177	177

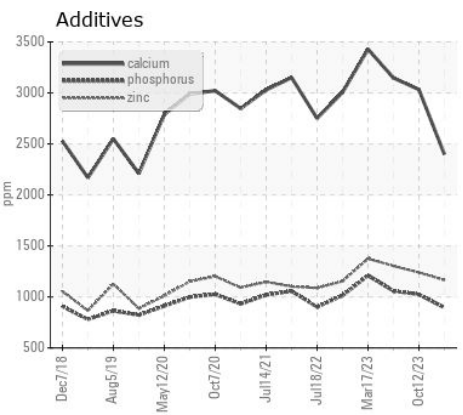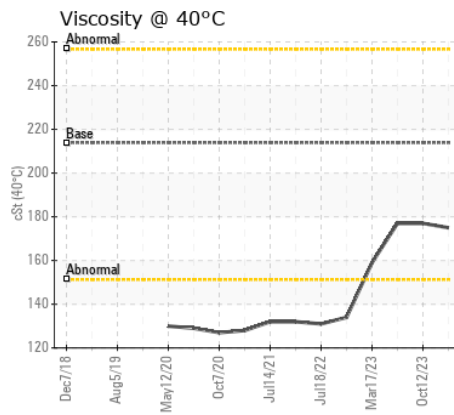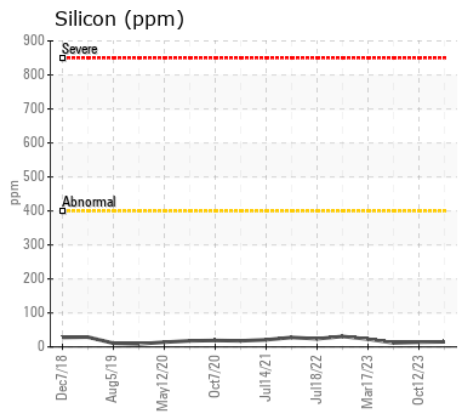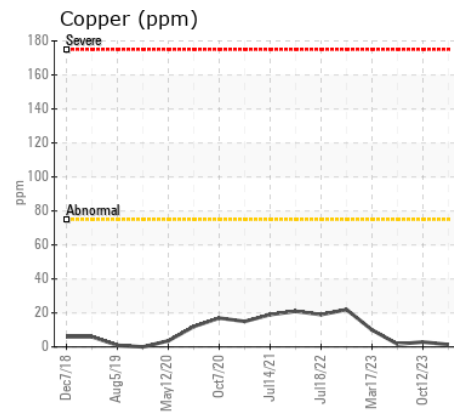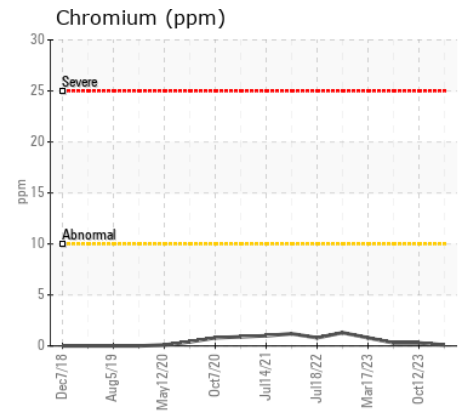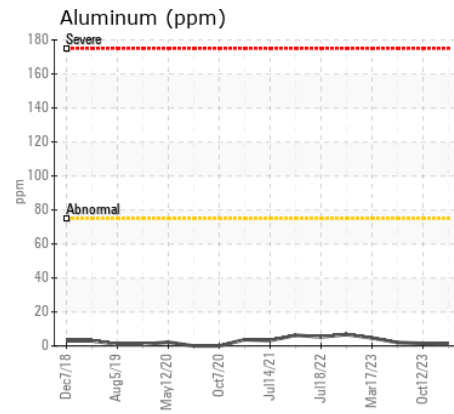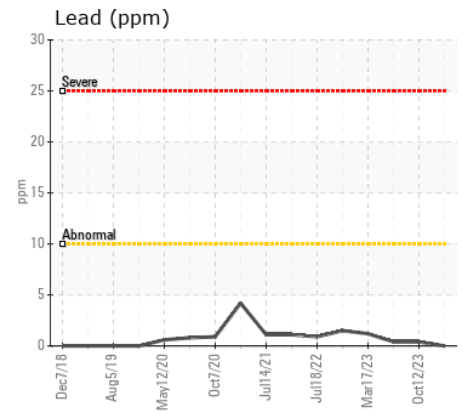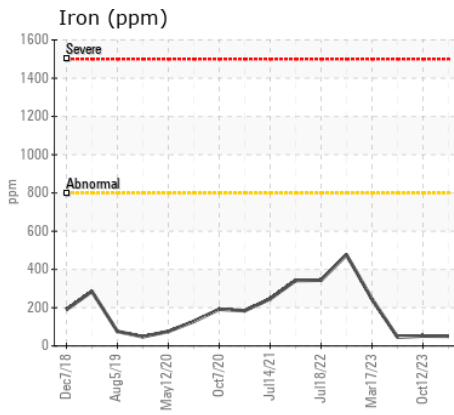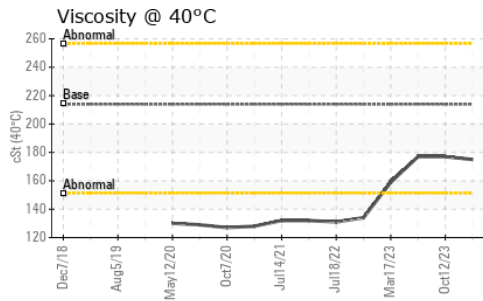

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0069790
Lab Number : 06101187
Unique Number : 10899417
Test Package : MOB 1

Received : 26 Feb 2024
Tested : 28 Feb 2024
Diagnosed : 28 Feb 2024 - Sean Felton

Kemp Quarries - Benton County Stone - Gravette
 15100 N Hwy 59
 Sulphur Springs, AR
 US 72768
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

gravette@bentoncountystone.com

T:
F: