



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KEMP QUARRIES / BCS - GRAVETTE [68022]
Machine Id
WL110
Component
Rear Right Final Drive
Fluid
MOBIL MOBILTRANS HD 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Pm2)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0108771	PCA0085731	PCA0062461
Sample Date		Client Info		13 Feb 2024	10 May 2023	29 Aug 2022
Machine Age	hrs	Client Info		28314	27770	27477
Oil Age	hrs	Client Info		544	27770	27477
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	N/A
Filter Changed		Client Info		None	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	4	48	57
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m	>15	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>75	<1	0	3
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>75	0	12	14
Tin	ppm	ASTM D5185m	>8	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	9	19	20
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	3	2
Boron	ppm	ASTM D5185m		0	13	26
Barium	ppm	ASTM D5185m		0	11	0
Molybdenum	ppm	ASTM D5185m		0	1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		17	32	18
Calcium	ppm	ASTM D5185m		2890	2824	2862
Phosphorus	ppm	ASTM D5185m		810	943	994
Zinc	ppm	ASTM D5185m		1051	1054	1186
Sulfur	ppm	ASTM D5185m		4057	5885	6200
Visc @ 40°C	cSt	ASTM D445	195	189	198	200

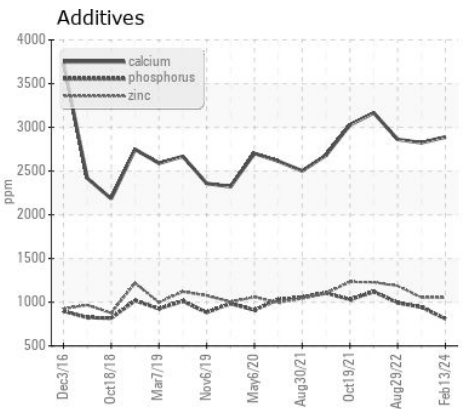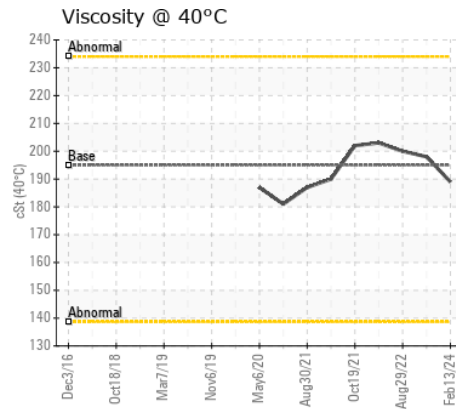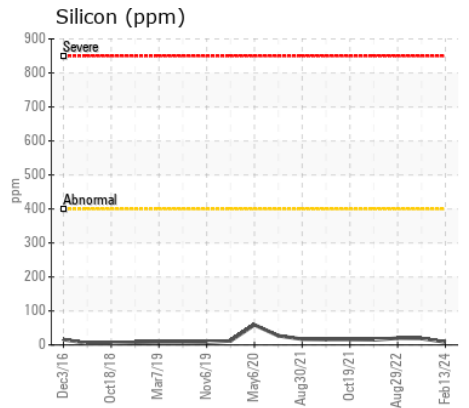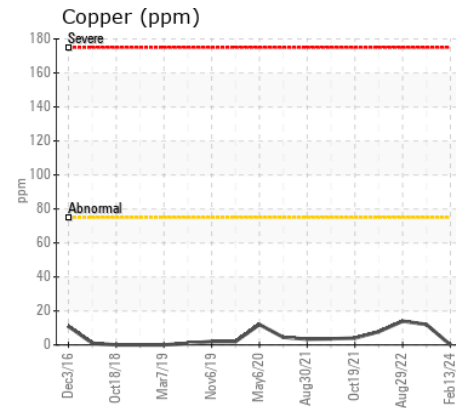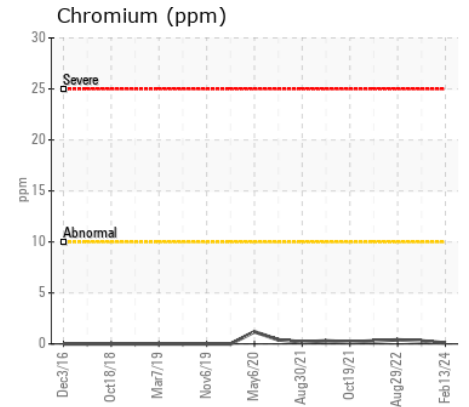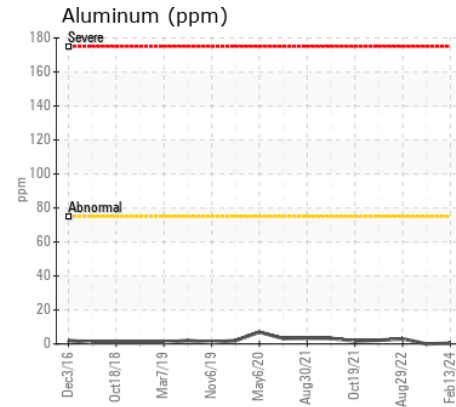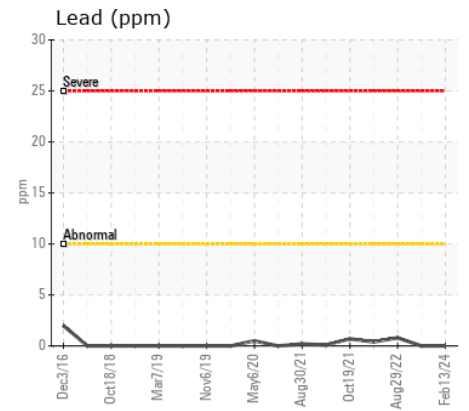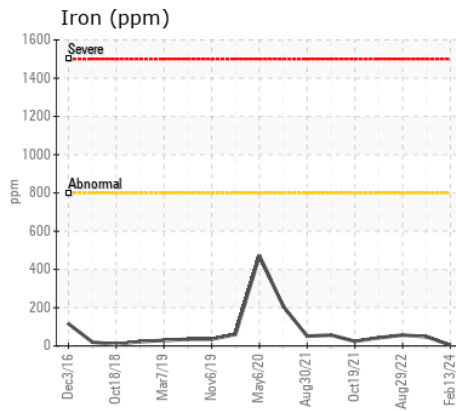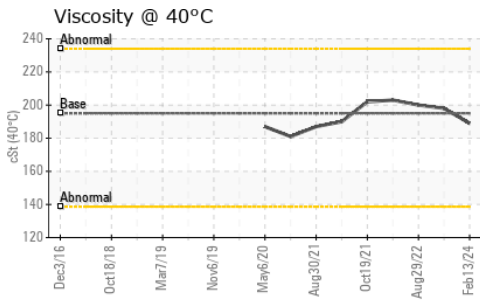

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0108771
Lab Number : 06101200
Unique Number : 10899430
Test Package : MOB 1

Received : 26 Feb 2024
Tested : 28 Feb 2024
Diagnosed : 28 Feb 2024 - Sean Felton

Kemp Quarries - Benton County Stone - Gravette
 15100 N Hwy 59
 Sulphur Springs, AR
 US 72768
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

gravette@bentoncountystone.com

T:
F: